BRAND GUIDELINES

Version 3.4 · 14 November 2026

Whity

A blank sheet, on the platform beneath it.



CONTENTS

Whity brand guidelines

	Introduction	3
01	Logo	7
02	Colour	15
03	Typography	19
04	Shape, space and depth	22
05	Iconography	26
06	Motion	28
07	Voice and content	33
08	Arabic and right-to-left	35
09	White-label and partners	38
10	Patterns	43
11	Products, names and plans	44
12	Engineering handoff	47
13	App map	53
14	Social and presentation	65
15	Agent UI	67
16	Documents	72
17	Components	79
18	Document editor	90
19	Plugin store	106
20	Home	113
21	Page patterns and people	117
22	Forms	125
23	Documents and routing	132
24	AI and agents	139
25	Workspace, billing and settings	148
26	Whity mobile	156
27	Work and operations	169
28	Roadmap	182
29	Websites	188
00	Whity brand decision register	205

INTRODUCTION

A blank sheet, on the platform beneath it

Whity is the platform a company's systems sit on: identity, permissions, documents, forms and apps, where AI agents can see and act across everything while a person approves what matters. It is open source at its core and white-label by design: the surface carries the customer's brand, the platform underneath is Whity's.

The whole identity repeats one picture: **a blank sheet, on the platform beneath it.** The white sheet is the customer's surface, the blue platform is Whity, and the offset between them is the idea. Interfaces say the same thing: quiet white sheets on a grey ground, one main action sitting on its plane, and agent work that stays a loose, dashed sheet until a person sets it down.

Version 2.9 (2 November 2026). The brand was rebuilt in nine stages, one decision at a time, and every decision is recorded in `00-decision-register.md`, the source of truth. This guideline, the tokens, the logo files, the components, the 13 document templates and the PDF are all drawn from it. 2.1 added the P2 components; 2.2 the design of the **document editor** (section 18) and the contract the Whity team builds it from; 2.3 the **plugin store** (section 19); 2.4 the **home** (section 20); 2.5 the **page patterns** and People screens (section 21); 2.6 **forms** (section 22); 2.7 **documents and routing** (section 23) and larger, plainer screens for people of every age; 2.8 **AI and agents** (section 24); 2.9 adds **workspace, billing and settings** (section 25), and with it every screen in the built app has a design. **3.0 (8 November 2026)** adds **Whity mobile** (section 26): the phone and tablet app, designed for one hand. **3.1 (8 November 2026)** adds **work and operations** (section 27): sixteen everyday areas on web and phone, with tasks on Taskaat and one chat for people and agents. **3.2 (8 November 2026)** adds the near-term pages from the roadmap (section 28) and the redesigned **websites** (section 29). Earlier versions are superseded.

Principles

- **Yours to brand.** A tenant's or partner's name and colour lead. Whity stays underneath, as the platform does in the mark.
- **Quiet and legible.** Pure greys, one main colour, Noto Sans at 15px, sized for people of every age. Nothing decorative competes with someone else's brand.
- **One thing on the plane.** The filled main button is the one action a view is for, and the only control that sits on the plane.
- **Easy at any age.** The people who run a company's systems are often over 50. Text is 15px and never below 13px, controls are 40px, common actions are labelled buttons, and screens speak in plain words; codes appear only on request (A.1–A.3).
- **Nothing happens unseen.** Every action is attributed, every agent is scoped, anything that matters waits for a person, and what can be undone shows Undo.
- **Open at the core.** Show how the platform works, in the blueprint style, to anyone who asks.

Using this system

- **Colour.** Tokens in Light and Dark (`tokens.json`). Whity Blue `#0961bb` is the main colour; greys have no chroma; status colours come as a fill, a text colour and a tint. Tenants change one colour and the rest is derived (Colour, White-label).
- **Type.** Noto Sans for the product at 15px (`text`), Noto Sans Arabic at the same size, Geist Mono for codes and IDs. Readex Pro 600 for brand headlines and document titles, never in the product's screens. No 700. Nothing below 11px.
- **Shape and space.** Controls 40px (32 small, 44 large) with corners ¼ of their height; cards 12px with a 1px border and no shadow; dialogs 16px; a 4px grid; 44px table rows; a 240px sidebar.
- **Depth.** The plane, a hard 3px offset down-left, sits under the main button, approved agent work and a hovered clickable card. Floating layers (menus, toasts, dialogs) get the soft `shadow-float`.
- **Focus.** A 2px ring in the main colour, offset 2px.
- **Icons.** Tabler outline, 156 curated names (`Icon`), 16px beside text. Agents are the robot face.
- **Components.** `components/bundle.js` (`window.Whity`, React 18), styled by `bundle.css`, typed in `index.d.ts`. Section 17 lists them by group; each has a card with a live preview.
- **Document editor.** Section 18 and the Document editor cards: a Notion-, Gutenberg- and Google Docs–inspired editor, designed here and built by the Whity team from `handoff/editor/`.
- **Plugin store.** Section 19 and the Plugin store cards: the store, a plugin's page, the install dialog and the Installed tab (A41).
- **Home.** Section 20 and the Home cards: one page per person, led by what waits for them.
- **Page patterns.** Section 21: list pages, record pages, states and confirming, and the People screens.
- **Forms.** Section 22: the builder, filling in, the public form and responses.
- **Documents and routing.** Section 23: the library, a document's page and its routing, templates, and the flow editor.
- **AI and agents.** Section 24: agents and their presets, an agent's page, connected AI apps, and what AI can do.
- **Workspace and settings.** Section 25: Settings, your account, billing, the audit log, and the operators' Platform pages.

- **Work and operations.** Section 27: tasks on Taskaat, boards, meetings, appointments, and the other everyday areas, on web and phone.
- **Websites.** Section 29 and the Websites cards: whity.dev (companies first, a door for builders), brand, status, Whity ID and docs, in English and Arabic.
- **Roadmap.** Section 28: the near-term work (low-hanging fruit) and the long-term plan toward a full ERP, inventory and project tool with low-code customization.
- **Mobile.** Section 26 and the Mobile cards: the Flutter app for phones and tablets: 17px text, 48px targets, everything frequent under the thumb, themed by each installation.
- **Documents.** `Doc` and `DocPages` lay out printed pages for Whity Render. Section 16 and the 15 document cards.
- **Handoff.** Web CSS variables, TypeScript tokens, a Tailwind v4 theme, the Flutter brand extension, icons and logos in `handoff/` (section 12).


Never

- Write the name in anything but Latin letters, or translate or transliterate it. There is no Arabic name or logo.
- Rotate, mirror, stretch or recolour the mark, change its offset, or put the colour version on Whity Blue.
- Put the plane on something that has not happened, or on more than one action in a view.
- Use glowing brains, sparkles, robot illustrations or blue-purple gradients for AI. An agent is the robot-face icon on the tint, and is shown by what it does.
- Use the blueprint style for pricing, policy, marketing claims or a tenant's own pages.
- Set text below 13px, in a light weight or in 700, or in all caps outside short mono labels.
- Show a real company's or person's name in a mockup without permission: use clearly fictional names (Example Bakery) or placeholders such as [Tenant name].

SECTION 01

Logo

The mark is **a blank sheet on the platform beneath it**: a white sheet (the customer's surface) resting on a blue platform (Whity), offset up and to the right. The wordmark is "Whity" in Readex Pro 600, capital W, always in Latin letters.

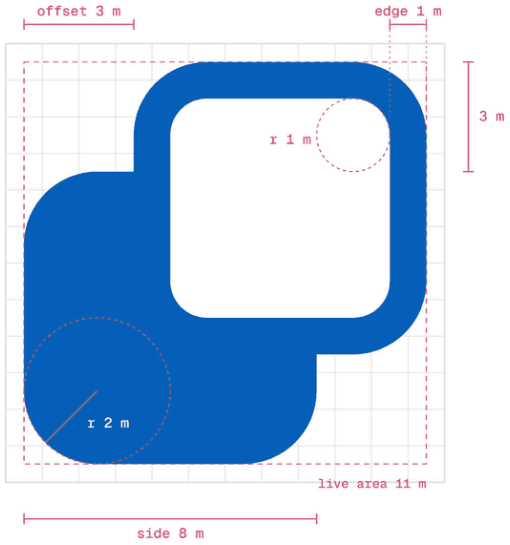

The mark on its 12-module grid: side 8, offset 3, radius 2, edge 1

THE MARK

8 : 3 : 2 : 1

Side · offset · radius · edge, in modules (m). One module is the width of the blue edge: 2px when the mark is 24px.

Planes	8 m square
Offset	3 m up and right (0.375 of the side)
Radius	2 m outside, 1 m inside, concentric
Edge	1 m, the same at every angle
Canvas	12 m, 0.5 m padding, live area 11 m

Every corner is ¼ of what it ends. Every gap is 3 m.

The mark


Everything is measured in one module, **m**: the width of the blue edge (2px when the mark is 24px, the same as the Tabler icon stroke).

	Value
Planes	Both 8 m square
Offset	The sheet sits 3 m up and 3 m right of the platform (0.375 of the side)
Radius	2 m outside, 1 m inside, concentric circular arcs, so the edge is exactly 1 m at every angle
Canvas	12 m square, 0.5 m padding, live area 11 m

Three rules hold the whole identity together:

- **Every corner is ¼ of what it ends**: the planes (2 m on 8 m), the dot on the i, the letter stems, and in the interface a control's corner is ¼ of its height.
- **Every gap is 3 m**: the offset, the gap between mark and word, and the clear space.
- **Every height in the lockup is a mark measure.**

Small sizes

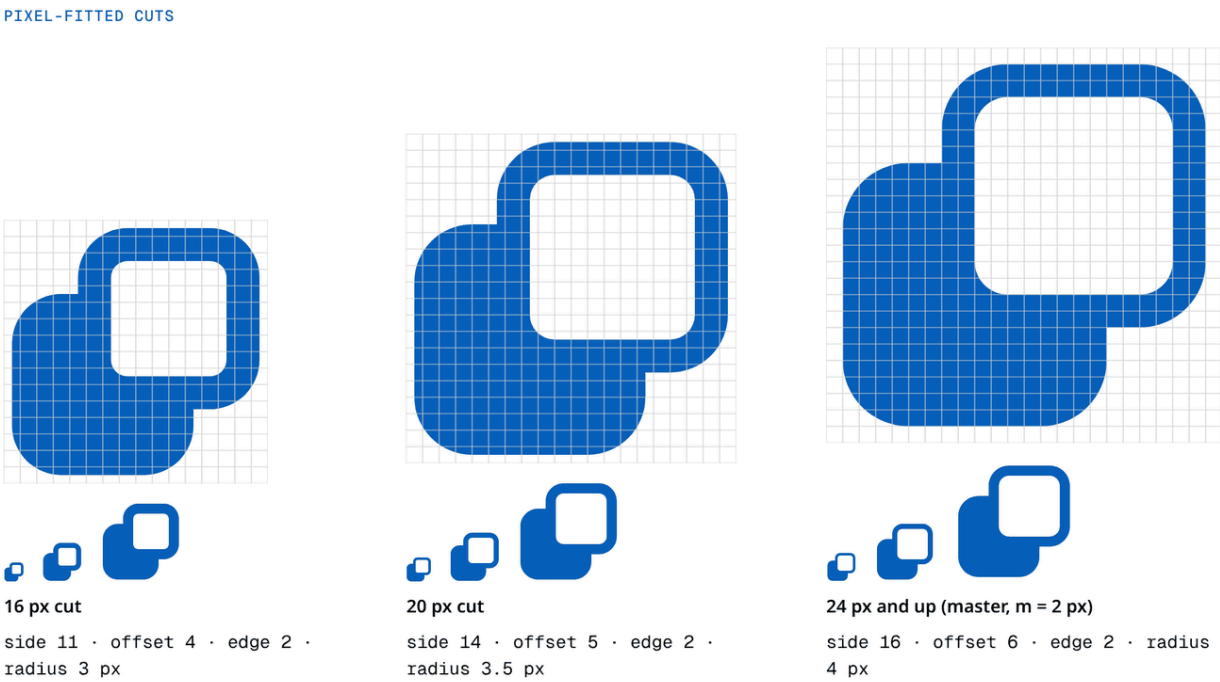

Pixel-fitted cuts for 16 and 20 pixels and the master from 24 pixels

Cut	Side · offset · edge · radius (px)	Use
16 px	11 · 4 · 2 · 3	Favicons, browser tabs, the Built on Whity badge
20 px	14 · 5 · 2 · 3.5	Touch navigation, small app chrome
Master	8 m · 3 m · 1 m · 2 m (m = 2px at 24px)	24px and up, all print

`Mark` and `Lockup` choose the cut from the size. In files: `whity-mark-16-*.svg`, `whity-mark-20-*.svg` and `whity-mark-*.svg`.

The lockup



The horizontal lockup with its cap line, baseline and 3-module gap, and the stacked lockup

- The word's cap height is the plane's side (8 m) and its x-height 6 m. The cap line is the platform's top edge and the baseline its bottom edge.
- The word starts 3 m after the sheet's right edge.
- The wordmark is Readex Pro 600, tracked −1%, outlined. The dot on the i is a rounded square as wide as the stem with corners ¼ of its side; outside corners of the letters are rounded to ¼ of the stem; inside corners stay sharp. It exists only as outlines: never set "Whity" in live type next to the mark.
- **Horizontal** is the default. **Stacked** (mark centred 3 m above the word) is for square spaces. **The mark alone** once the name is already on screen.

- The lockup is the same in every language. In Arabic layouts it stays left to right, with the mark on the left.


Clear space and minimum size



Clear space of 3 modules around the live area, and the minimum sizes

- Keep **3 m** clear around the live area.
- Minimum sizes: the horizontal lockup 20px tall on screen (word cap height 13.3px) and 6 mm in print; the stacked lockup 48px tall; the mark alone 16px.

Colourways

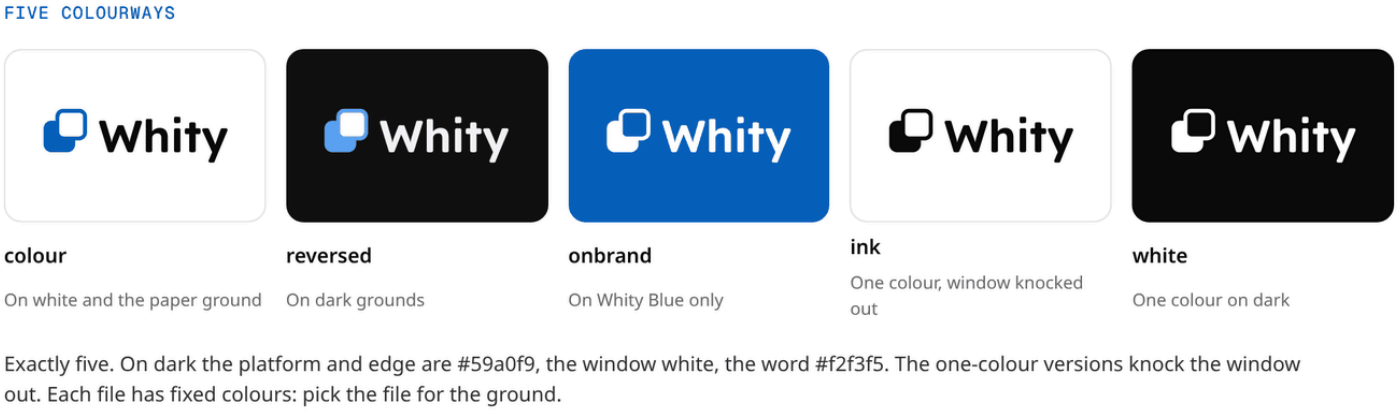


The five colourways on their grounds

File suffix	Platform and edge	Window	Word	Ground
`colour`	Whity Blue `#0961bb`	white	Ink `#0a0a0a`	White, the grey page, light photos
`reversed`	`#59a0f9`	white	`#f2f3f5`	Dark grounds, dark photos
`onbrand`	white	Whity Blue	white	Whity Blue only: the app icon, the blueprint
`ink`	one colour, window knocked out		ink	One-colour print, stamps, embossing
`white`	one colour, window knocked out		white	One colour on dark: etching, signage

Exactly five. Each file has fixed colours (an `<img>` can't follow the theme): pick the file for the ground. In code, `Mark` and `Lockup` with `tone="auto"` follow the theme.


App icon and favicons

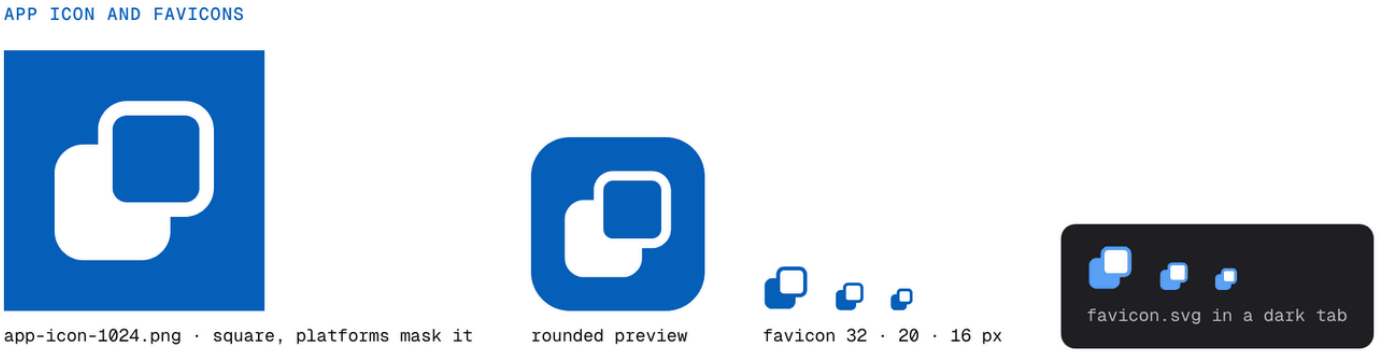

The app icon, the rounded preview and the favicons at 32, 20 and 16 pixels

- **App icon**: a Whity Blue tile of 18 m with the `onbrand` mark whose live area is 61% of the tile (3.5 m margin). The same tile is the PWA icon, the social avatar and large favicons. Ship the square (`app-icon-1024.png`); platforms apply their own corner mask. Never add rounding, a border or a shadow.
- **Favicon**: `favicon.svg` uses the 16px cut and switches to the dark colours in a dark browser theme; `favicon.ico` carries 16, 32 and 48px.

Don't

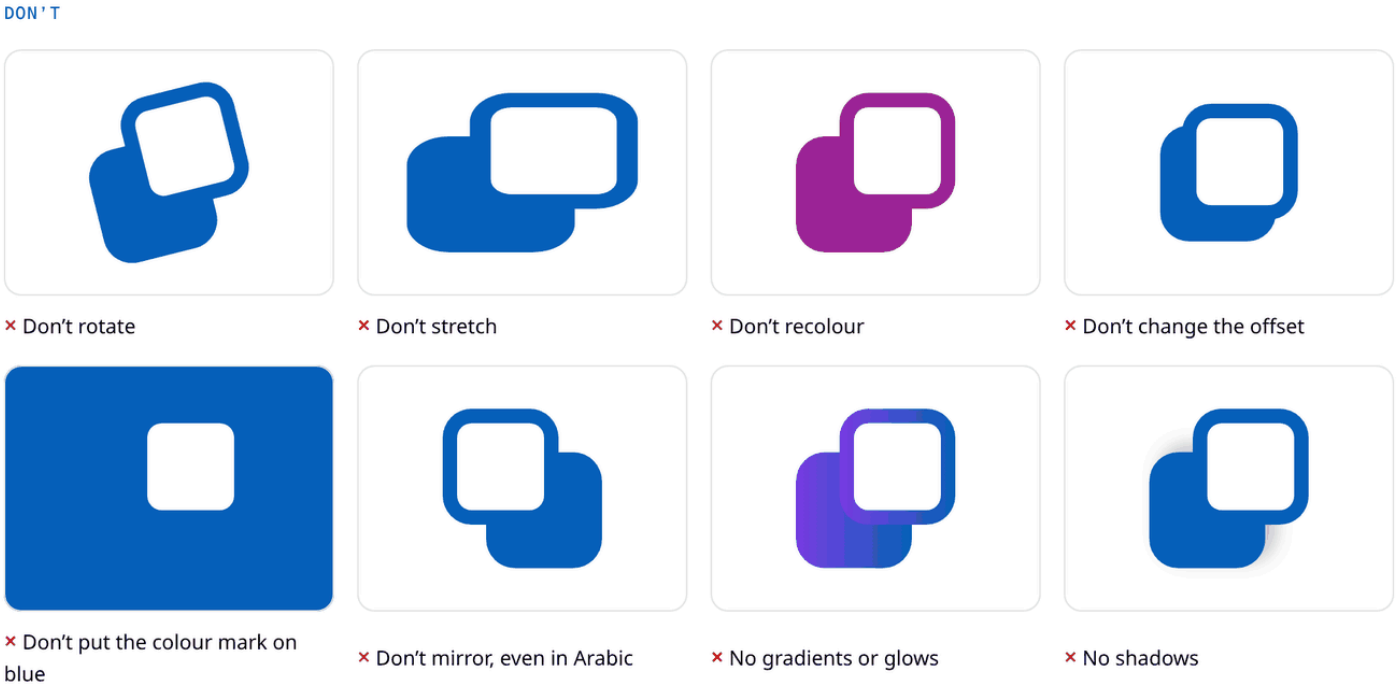

Eight misuses of the mark


- Don't rotate, stretch, mirror or recolour the mark, or change the offset. The mark never mirrors, even in Arabic.
- Don't put the colour version on Whity Blue (use `onbrand`) or on a busy photo without a sheet behind it.
- No gradients, glows, shadows or outlines.
- Don't redraw the wordmark, set it in another font or in lowercase, or translate the name.

Files: the Logos asset group (SVG and the 1024px app icon) and `handoff/logos/` (every colourway and cut, PNG exports, `favicon.svg`, `favicon.ico`, the Built on Whity badges).

SECTION 02

Colour

One blue and a set of pure greys. Whity Blue is the platform; every grey has zero chroma, so a tenant's own colour never fights a tint it did not choose.

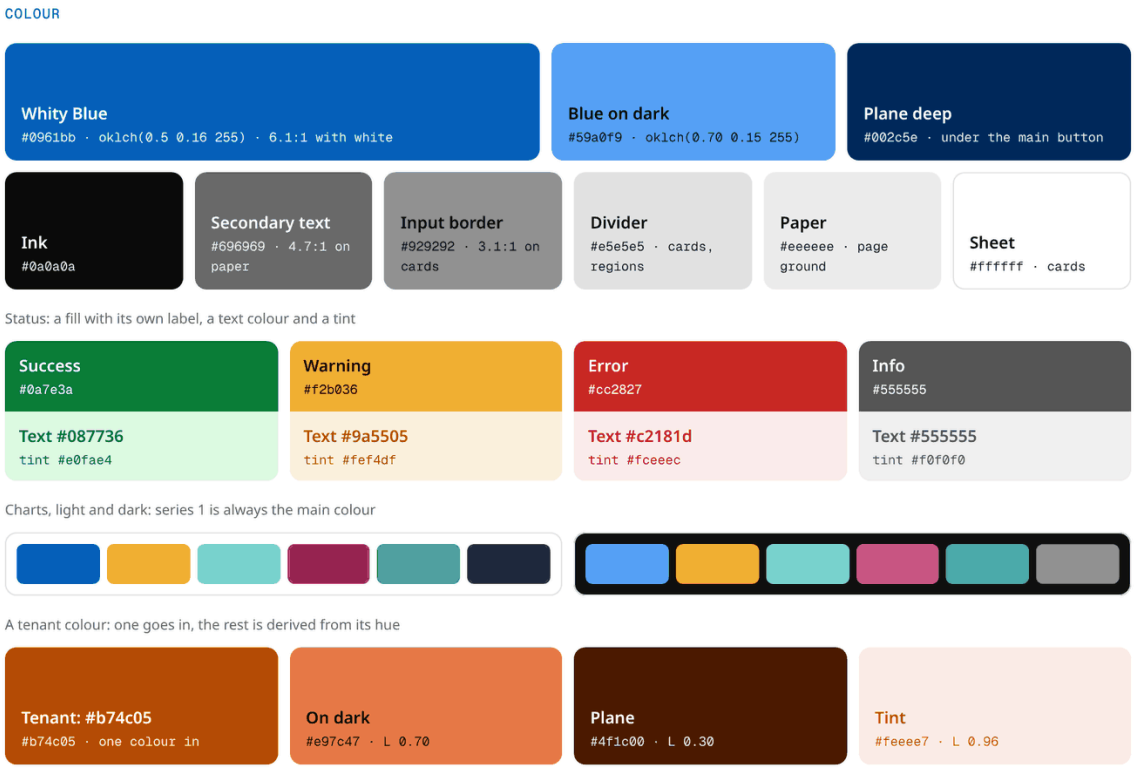

The palette: brand blues, greys, status colours, chart series and a derived tenant colour

Brand and ground

Name	Token	Light	Dark	Role
Whity Blue	`primary`, `brand`, `ring`, `chart-1`	`#0961bb` · oklch(0.5 0.16 255)	`#59a0f9` · oklch(0.70 0.15 255)	The mark, the main action, links, focus, selected state. White text on it is 6.1:1; on dark, buttons take a dark label
Plane deep	`plane-deep`	oklch(0.3 0.1 255)	oklch(0.42 0.13 255)	The plane under the main button. Decorative only
Page	`background`	`#eeeeee`	`#0a0a0a`	The ground under every card
Card	`card`, `popover`	`#ffffff`	`#171717`	Cards, panels, menus, documents
Ink	`foreground`	`#0a0a0a`	`#fafafa`	Text
Secondary text	`muted-foreground`	`#696969` · oklch(0.52)	`#a1a1a1`	Descriptions, hints, metadata
Control border	`input`	`#929292` · oklch(0.66)	`#696969` · oklch(0.52)	Inputs, outline buttons, checkboxes: 3:1 against the card
Border, divider	`border`, `divider`	`#e5e5e5`, `#ececec`	white at 10% and 7%	Card edges and lines inside cards; decorative, so they stay light
Table header	`table-header`	`#f7f7f7`	oklch(0.23)	The header row of a table
Tint	`primary-tint`	`#ebf3fc`	`#182e4b`	The selected state (7.3), with `primary-tint-foreground` text

Status

Each status is three tokens: a **fill** (with its own label colour), a **text** colour that reads on cards and on the page, and a **tint** for badges and alert grounds. Error and destructive are one colour. Info is neutral grey: blue is kept for action and the brand.

Status	Fill · label	Text	Tint	Dark: fill · tint
Success	`#0a7e3a` · white	`#087736`	`#e0fae4`	`#5ac576` · `#14361d`
Warning	`#f2b036` · `#1a1206`	`#9a5505`	`#fef4df`	`#f7b83d` · `#432f07`
Error	`#cc2827` · white	`#c2181d`	`#fceeec`	`#f66d67` · `#4f1a18`
Info	`#555555` · white	`#555555`	`#f0f0f0`	`#aeaeae` · `#262626`

Status colours mean status only, always with a word or an icon, never as brand colours and never in marketing.

Charts

	1	2	3	4	5	6
Light	main `#0961bb`	amber `#f7a224`	sky `#91dbf2`	plum `#9d2398`	green `#35aa76`	graphite `#3a3a3a`
Dark	main `#59a0f9`	`#f7a224`	`#91dbf2`	`#d25bcb`	`#53c48e`	`#858585`

- Series 1 is always the tenant's main colour. Neighbouring series differ by at least 0.08 in OKLab under deuteranopia and protanopia, checked in both modes (the dark graphite moved to `#858585` in 2.1 to pass beside green). Graphite is also the "Other" slice.
- Every chart has a legend for two or more series, labels one value, and offers "Show as table", so nothing depends on colour alone (section 17).
- Ordered data (sequential) uses lightness steps of the main colour, not the categorical set.
- On paper, charts are grey with the one bar that matters in ink (section 16).

Tenant colour

One colour goes in; the rest is derived from its hue (decision 2.8): on dark at lightness 0.70 (chroma up to 0.15), the plane at 0.30 (up to 0.10), the tint at 0.96 (up to 0.03). Each can be overridden. The label on the colour is white or near-black, whichever passes 4.5:1; if neither does, the colour is darkened and the admin sees what changed. The demo tenant, Example Bakery, is burnt orange `#b74c05` (white label 5.2:1) with `#e97c47` on dark, `#4f1c00` plane and `#feeee7` tint.

Contrast (WCAG 2.2)

Pair	Light	Dark
Ink on page	17.1	19.0
Ink on card	19.8	17.2
Main colour on card (links)	6.1	6.7
Label on main colour	6.1	6.7
Secondary text on card · on page	5.5 · 4.7	6.9 · 7.7
Control border on card (non-text, 3:1)	3.1	3.3
Selected tint text on tint	5.5	6.8
Status text on card · on page · on its tint	5.7–7.5 · 4.9–6.4 · 5.1–6.5	6.2–10.1 on card
Warning label on warning fill	9.7	

Every text pair passes 4.5:1 in both themes; every control border and focus ring passes 3:1.


Print

Match Whity Blue from a physical proof with your printer; screen values do not convert reliably to CMYK. For one colour, use the `ink` logo files. Documents keep the tenant colour on the title only (section 16).

SECTION 03

Typography

Clean and legible first. Four open-source families (SIL Open Font License 1.1), each with one job.

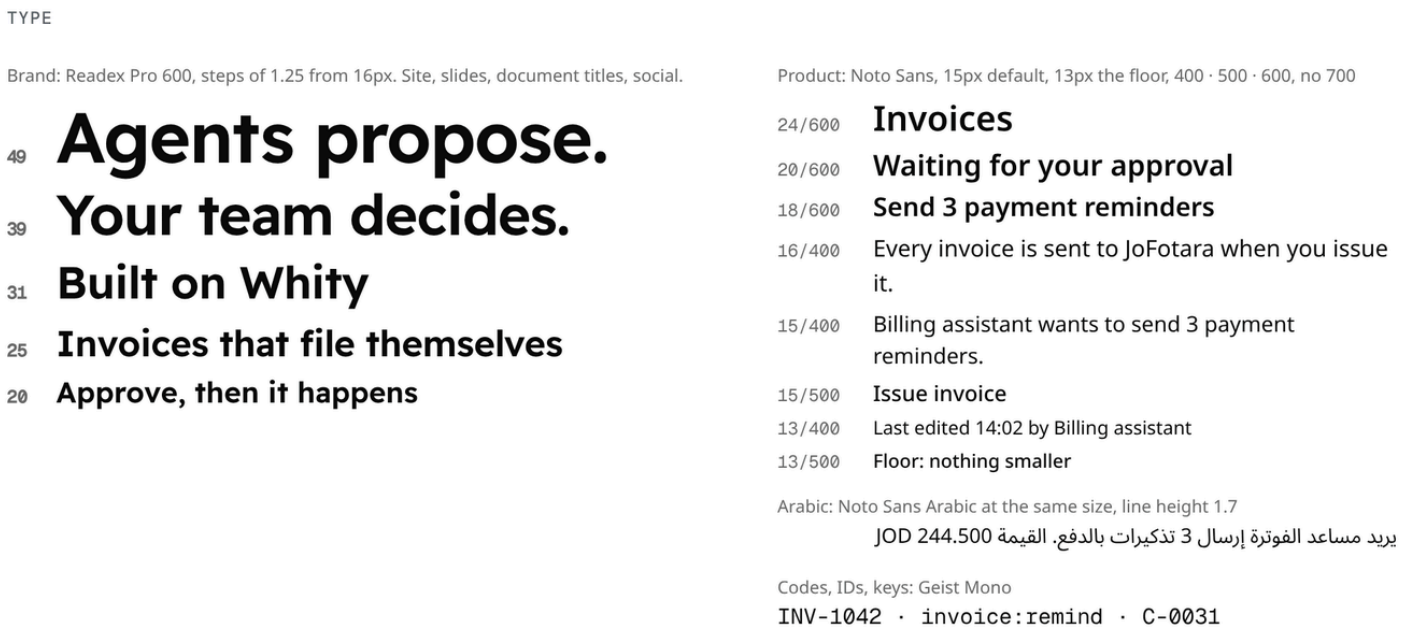

The brand headline scale in Readex Pro and the product scale in Noto Sans, with Arabic and mono samples

Family	Job
Readex Pro 600	Brand headlines: the website, slides, social posts and document titles. Never in the product's own screens. The wordmark is drawn from it.
Noto Sans 400 · 500 · 600	Everything people read in the product: titles, body, tables, buttons, forms.
Noto Sans Arabic 400 · 500 · 600	Arabic interface text, at the same size as Latin. A first-class face, never a fallback.
Geist Mono 400 · 500	Codes, IDs, permission keys (`invoice:remind`), tool names, short uppercase labels.

Product scale (Noto Sans)

Style	Size / line height	Weight	Use
`title-page`	24 / 1.25	600	Page title (`PageHeader`), one per page
`title-section`	20 / 1.25	600	Section titles
`title-card`	18 / 1.25	600	Card, dialog, drawer and proposal titles
`stat`	24 / 1.2	600	Key numbers, tabular figures
`text-lg`	16 / 1.5	400	Reading pages, emails, onboarding
`text`	**15 / 1.5**	400	The default: body, table cells, inputs (A.1)
`label`	15 / 1.25	500	Labels, buttons, tabs, table headers
`caption`	13 / 1.5	400	Hints, metadata, timestamps: the floor
`micro`	13 / 1.25	500	Counters and badges (same size as caption since A.1)

Brand scale (Readex Pro 600)

Steps of 1.25 from a 16px body: **49 · 39 · 31 · 25 · 20 · 16**. Line height 1.1 for the large sizes and 1.25 for the small; tracking −2% at 39 and 49, −1% at 20, 25 and 31. Arabic document titles use Readex Pro's Arabic design (E.35). Body text beside a brand headline stays Noto Sans. Documents use the title at 22 pt.

Arabic

- Set at **100%** of the Latin size (decision 3.7a), in Noto Sans Arabic, with a taller line: **1.7** for body text and 1.5 for labels and titles.
- No letter spacing and no uppercase styles.
- **Western digits 0–9** in every language, for money, dates, codes and data, so amounts read the same in both.
- The name stays "Whity" in Latin letters inside Arabic text, isolated with `<bdi>` (Flutter: an LTR `TextSpan`).

Rules


- **No 700** in the product, and nothing below 400. Hierarchy comes from size and 500–600.
- **Nothing below 13px** (A.1). Management screens are used mostly by people over 50, so product text is 15px and captions 13px. Printed documents and the editor sheet keep their own scales.
- **Letter spacing is 0**, except brand headlines (−1% to −2%) and short uppercase mono labels (+6%).
- **Sentence case** everywhere; uppercase only for short mono labels.
- **Tabular figures** for numbers in tables, money and times (`font-variant-numeric: tabular-nums`; Flutter `FontFeature.tabularFigures()`).
- **Line length**: reading text at most 68 characters per line; forms at most 720px wide.
- **One page title** per page, and no more than three sizes in one component.
- Never set the wordmark in live type: use `Lockup` or the logo files.

Files: `fonts/` (Noto Sans, Noto Sans Arabic, Geist Mono and Readex Pro 600, woff2) and `handoff/flutter/pubspec_fonts.yaml`.

SECTION 04

Shape, space and depth

Every screen is white sheets on a grey ground: `card` surfaces on `background`, separated by space and a light border rather than shadows. The mark's two numbers run through it: the ¼ corner and the 3px plane.

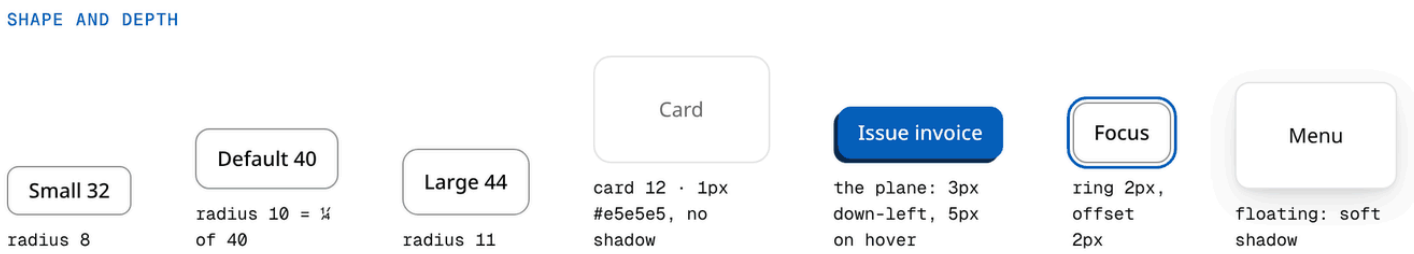

The ¼ rule from the mark: a control's corner is ¼ of its height. The plane, the mark's offset, sits only under the main button, approved agent work and a hovered clickable card. It never mirrors.

Control heights and corners, the card, the plane under the main button, the focus ring and a floating menu

Density

	Value
Controls	40px (`control-h`); small 32px for toolbars and tables; large 44px (A.1)
Table rows	48px (`row-h`)
Grid	4px steps: `space-1` 4 · `space-2` 8 · `space-3` 12 · `space-4` 16 · `space-6` 24 · `space-8` 32
Gaps	16px between groups, 24px between page sections
Touch targets	At least 44 × 44px in the tenant apps on phones

Shape: the ¼ rule

A control's corner is ¼ of its height, as the mark's corner is ¼ of its side.

Token	Radius	For
`radius-control-sm`	8	32px buttons, menu items (`radius-md`)
`radius-control`	10	40px buttons, inputs, selects
`radius-control-lg`	10	40px buttons, popovers, menus, toasts (`radius-lg`)
`radius-card`	12	Cards, alerts, tables, proposals (`radius-xl`)
`radius-dialog`	16	Dialogs (`radius-2xl`)
`radius-sm`	4	Checkboxes, inline code, keyboard hints
`radius-full`		Badges, chips, switches, avatars

Layout

	Value
App shell	Sidebar 240px (`sidebar-w`). Below 1024px it becomes a 56px rail of icons with tooltips; below 768px a drawer opened from the top bar (`AppShell`)
Breakpoints	640 · 768 · 1024 · 1280 · 1536 (Tailwind's)
Page width	Reading pages (forms, settings) at most 1280px (`content-max`), centred; tables and boards may use the full width
Gutters	24px on desktop, 16px on phones (`gutter`); cards pad 16–20px; 12 columns with 24px gaps
Reading width	Forms at most 720px (`form-max`); text at most 68 characters per line
Drawer	480px from the end edge; full screen below 768px

Surfaces and lines

- **Cards**: `card` with a 1px `border` (#e5e5e5), no shadow.
- **Dividers**: 1px `divider` (#ececec) inside cards; 1px `border` between page regions.
- **Tables**: horizontal lines only, no zebra stripes and no vertical lines; the header row is `table-header` ; numbers end-aligned in tabular figures.
- **Focus**: a 2px ring in the main colour, offset 2px, on every interactive element.

Depth: the plane

The mark's offset becomes a hard shadow, down-left, never blurred. It is used in exactly three places:

1. **The main button**: `plane-primary-rest` (3px, in `plane-deep`), growing to `plane-primary-hover` (5px) on hover as the button lifts 1px.
2. **Approved agent work**: an approved proposal is set down on `plane-rest`.
3. **A hovered clickable card**: `plane-hover`; informational cards never move.

The plane **never mirrors**: it sits down-left in every language, like the mark. Floating layers (menus, popovers, toasts, dialogs, drawers) use the soft two-layer `shadow-float` instead, over the `overlay` scrim where they are modal. The plane is never used for floating layers.

Dashed means "not yet"


A dashed edge marks something that has not happened or is not set down: a waiting agent proposal, an undone action, an empty slot to fill. Never use dashed lines as decoration.

Imagery


- Show real screens on sheets: an approval, a document, a dashboard, with realistic example data in JOD.
- Photography, when used: real work in real offices and shops, natural light, no posed handshakes or stock robots.

IN USE

The admin dashboard, light and dark

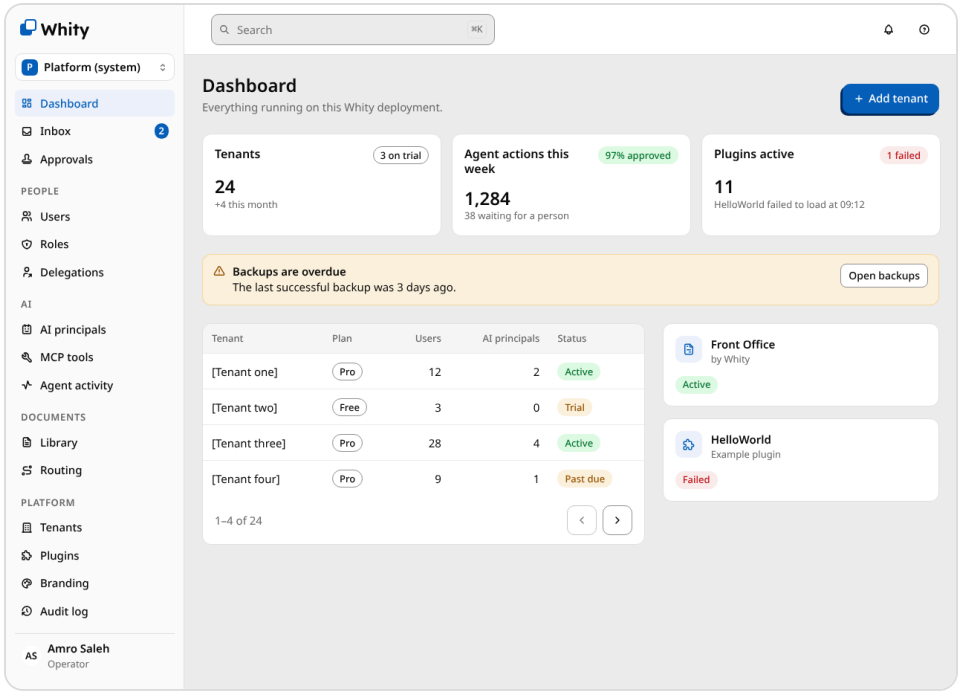

Admin dashboard

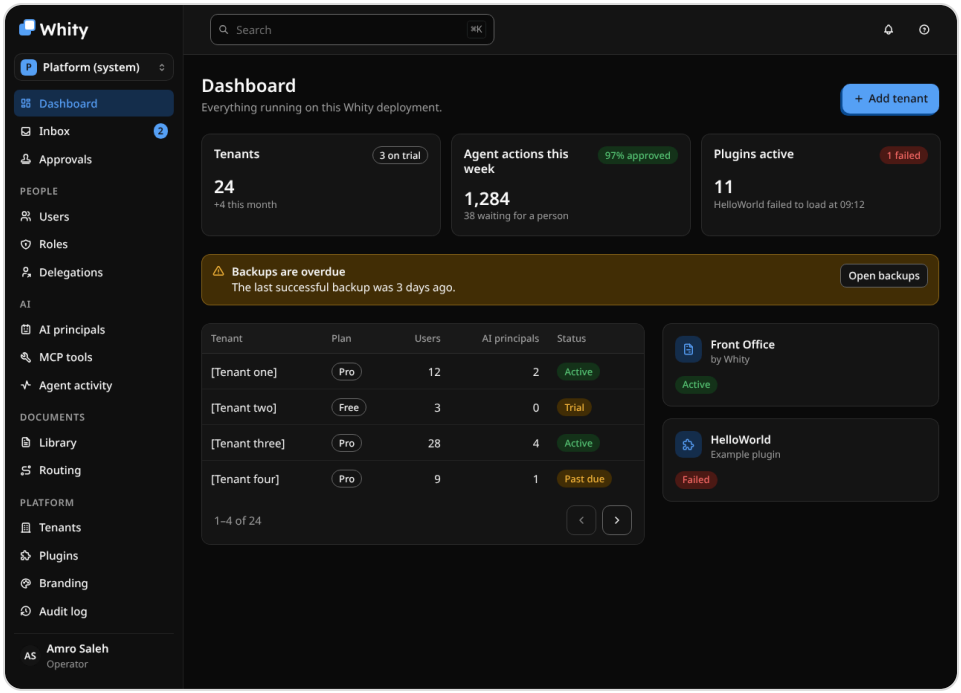

Admin dashboard

SECTION 05

Iconography

Tabler outline icons (MIT), the set the product already uses through `@tabler/icons-react`: a 24px grid, round caps and joins, drawn in `currentColor`. This system curates 156 of them under Whity's own names, so screens and docs use the same word for the same thing.

Size and weight

Size	Stroke	Where
16px	2.25 (renders 1.5px)	The default, beside 15px text: buttons, navigation, table rows, menus
20px	2	Touch navigation, cards
24px	2	Page headers, empty states
12–14px	2.25	Inside badges, chips and metadata

The 16px stroke is thicker on purpose: it renders at the same optical weight as 20 and 24px (decision 5.2). `Icon` sets it from the size.

Names

Whity's words map to one icon each: `tenant` (building), `role` (shield-lock), `permission` (key), `delegation` (user-share), `ai-principal` and `robot` (robot face), `approval` (rubber stamp), `scope` (lock-access), `routing` (route), `inbox`, `plugin` (puzzle), `tool` (MCP tools), `audit` (history), `invoice`, `quote`, `receipt`, `money`. The document editor adds 28 (2.2): `bold`, `italic`, `underline`, `strike`, `code`, `highlight`, `heading-1` to `heading-3`, `list-bullet`, `list-numbered`, `list-todo`, `blockquote`, `table`, `image`, `columns`, `divider`, `page-break`, `field` (braces), `comment`, `comment-add`, `drag` (grip), `redo`, `text`, `outline`, `suggest`, `page` and `continuous`. The full list, with each Tabler name, is in `handoff/icons/icons.json` and on the Icon card.

Mobile (3.0) adds 21: `wifi`, `battery`, `microphone`, `camera`, `apple`, `shuffle`, `rotate`, `key`, `archive`, `barcode`, `signature`, `at`, `fingerprint`, `shield`, `text-size`, `gesture`, `card`, `pause`, `play`, `attach`, `ban`. Mobile icons sit at 20px in rows and 24px in the tab bar. Work and operations (3.1) add `kanban`, `meeting`, `appointment`, `flag`, `video`, `record`, `gavel`, `evidence`, `check-in`, `package`, `transfer`, `recipe`, `batch`, `bank`, `wallet`, `trigger`, `branch`, `away` and `org`.

Agents

An agent is always Tabler's **robot face**, in the main colour on the tint (decision 5.1), in its avatar, actor chip and the AI principals screen. Never sparkles, brains, glowing effects or illustrated robots.

Direction

`chevron-left`, `chevron-right`, `arrow-right`, `send`, `undo`, `external`, `logout`, `play` and `shuffle` mirror in right-to-left layouts; `Icon` does this by itself (`mirror: false` stops it). The mark never mirrors.

Rules

- An icon beside a word repeats it; an icon alone needs a label (`IconButton` takes `label`, which is also its tooltip).
- Don't mix in other libraries. A missing icon comes from Tabler's outline set first; anything drawn new follows the same grid, stroke and corners.
- Icons are never coloured for decoration: they take the text colour, or a status colour when they show a status.

Files: `handoff/icons/ink/*.svg` (for light grounds), `handoff/icons/paper/*.svg` (for dark grounds), `icons.json`, and Tabler's licence.

SECTION 06

Motion

Short, calm and only where it explains a change. Everything settles on one curve, without bounce.

Token	Duration	Use
`dur-fast`	120 ms	Hover, press, focus, the button lift
`dur-base`	180 ms	State changes: switches, tabs, selection, the bulk bar rising
`dur-slow`	250 ms	Things entering: dialogs, drawers, the mobile sidebar
`ease-out`	cubic-bezier(0.2, 0, 0, 1)	Every transition

The signature moment: set down

When a person approves an agent's proposal, the loose sheet is set down on the platform: the dashed edge turns solid in the main colour and the plane slides in underneath. Approving **one** item plays the Lottie `approve-set-down.json` (1.2 s, LT.4); **bulk** approval stays the **200 ms** set-down in code (decision 5.4). Undo plays it backwards and the card turns dashed again. File: `approve-set-down.mp4` in Motion; the exact values are in `handoff/motion/README.md`.

Timed things

- **Toast with Undo**: 10 seconds, a thin bar runs down along its foot and pauses while the pointer or focus is on it.
- **Undo window**: after the toast, the activity item keeps Undo with a meter for the tool's window (for example 30 minutes for email).
- **Tooltips** appear after 500 ms on hover and at once on keyboard focus.

Rules

- The main button lifts 1px up-right on hover as its plane grows from 3 to 5px, and presses back down when clicked. That is the only movement on buttons.
- Clickable cards lift onto the plane; informational cards never move.
- Floating layers fade and move 4–8px into place; drawers slide from the end edge (from the left in Arabic).
- Show `Skeleton` rows for loads over 300 ms instead of a spinner.
- The mark never animates in the product. On a splash screen it may set the sheet down once (200 ms).
- **Reduced motion** shows the end state only: no movement, toasts without the running bar, skeletons hold still.

Lottie library (LT.1–LT.4)

Thirty-one real Lottie files live in `handoff/motion/` with their rules, colour names and code for the web and Flutter (its `README.md`). They play once when seen, never loop forever (except while loading), stop on their last frame when less motion is asked for, carry no text, and take their colours from the live tokens, so they follow dark mode and each workspace's colour. `approve-set-down` is the one people play themselves: Approve forwards, Undo backwards.


Lottie in the app (LT.4)

Lottie makes the app's quiet moments clearer and friendlier: empty lists, things done, the first run, waiting, and errors. Cards: `TplMoments` (web), `TmMoments` (phone).

- **Where:** empty states (`empty-invoices`, `empty-stock`, `empty-documents`, `empty-people`, `no-results`, `all-caught-up`); done moments (`approve-set-down` for one item, `invoice-sent`, `payment-received`, `stock-received`); first run (`setup-done` and the brand stories); waiting (`waiting-reply`, `uploading`, `updating`, `offline`); errors (`went-wrong`, `not-found`).
- **How long:** everyday moments 1–1.5 s; first-time and rare moments up to 3 s. One scene at most on a screen.
- **How often:** empty states once a session per list; first-run scenes once ever per person; done moments each time; loops only while really waiting, stopped the moment it's done.
- **Never in the way:** buttons work while anything plays; nothing waits for an animation to end; the words say what happened, so the picture is never the only signal.
- **Your brand:** every file is recoloured by colour name to the workspace's brand and to dark mode.
- **Animations setting:** Full (default), Calm (the last frame fades in), Off (still). Reduce motion on the device means Off.

IN USE


Lottie in the web app: empty, done, first run, waiting, errors

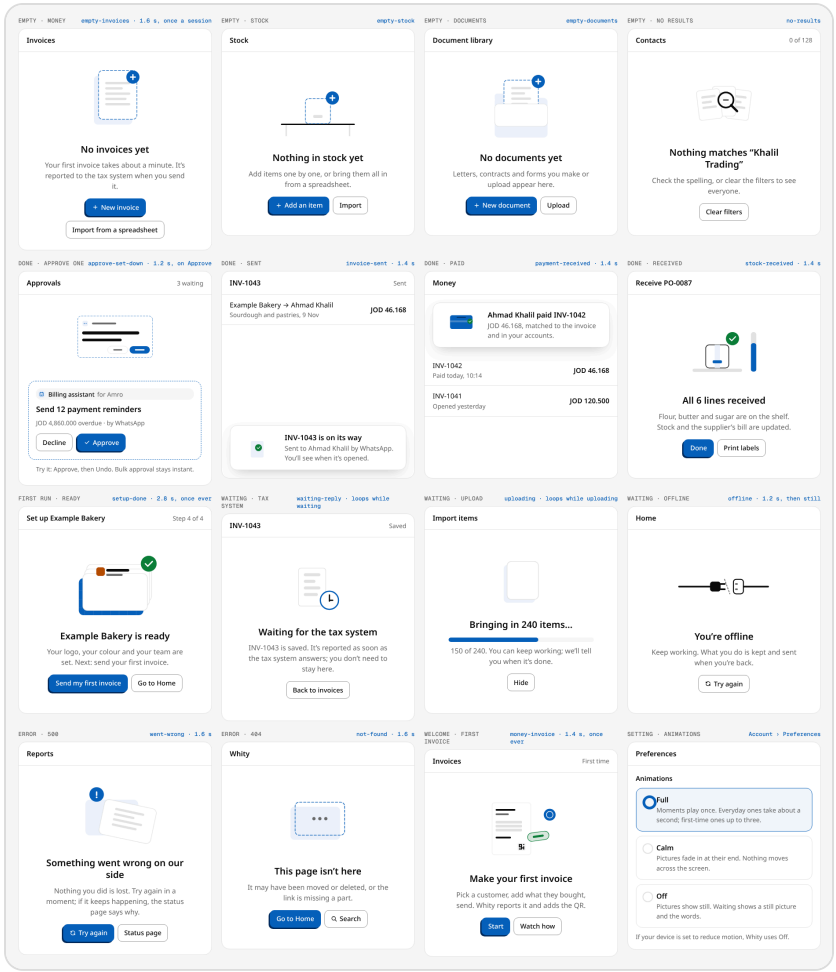

Sixteen moments in the web app, with the Animations setting

IN USE

The same moments on the phone (dark)

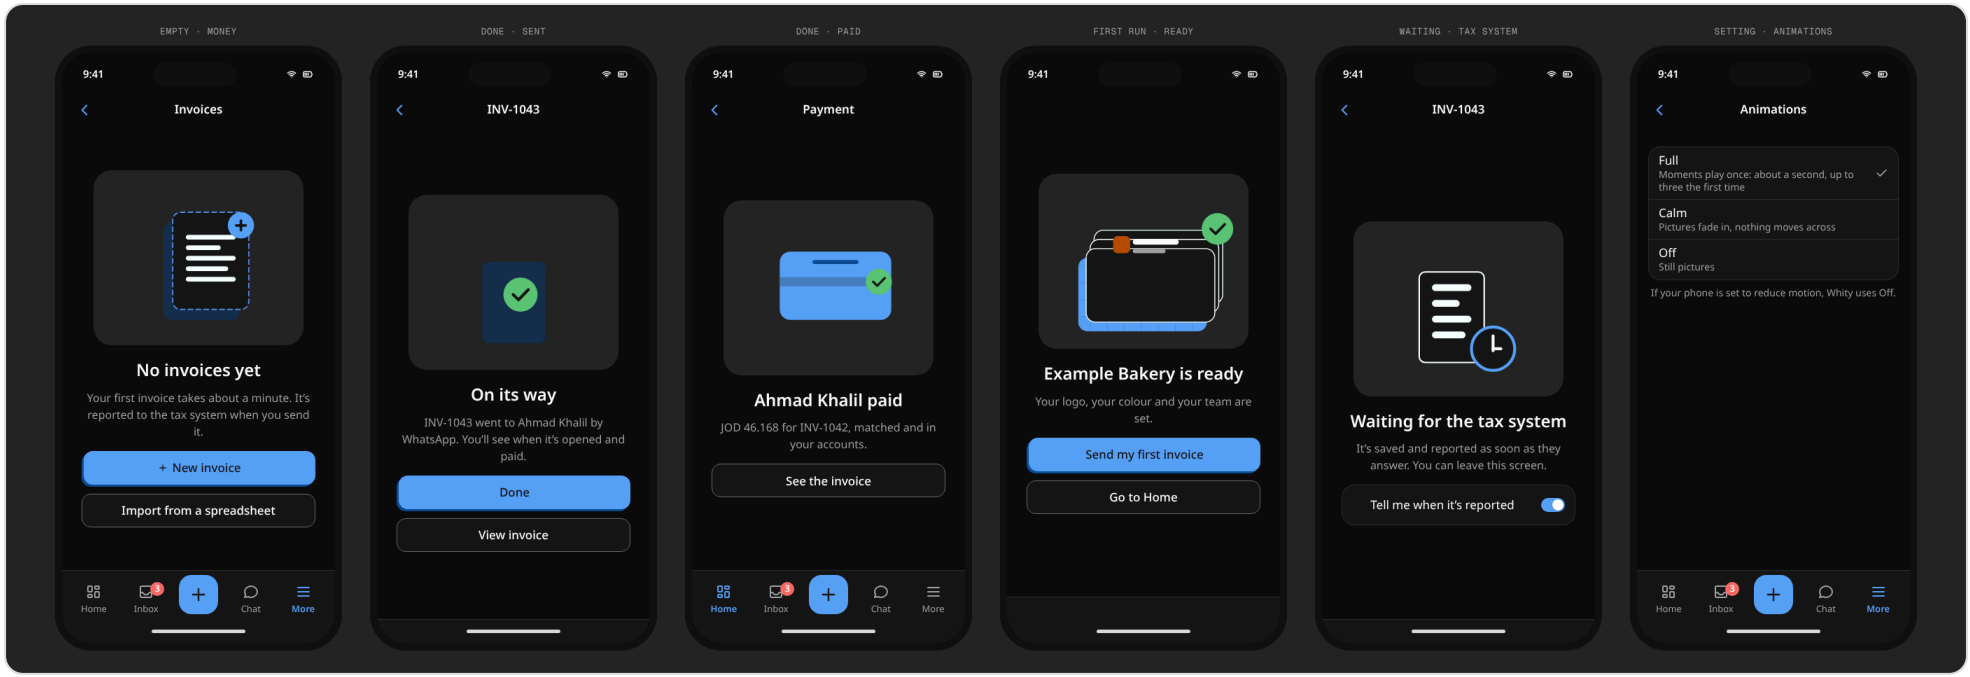

Empty, sent, paid, ready, waiting, and the setting

SECTION 07

Voice and content

Whity sounds like a senior engineer explaining a system to a business owner: plain, exact, calm, and on the owner's side. Whity's own brand speaks English; the product is written in English and Arabic.

English

- **Plain and direct.** Write to "you", use active verbs, and say what happens. "We" only on the website and in docs, never in the product.
- **Buttons name the action**: "Issue invoice", "Approve", "Revoke credential", "Undo". Never "Submit", "OK", "Confirm" or "Proceed".
- **Short and specific.** A fact beats a promise: "Last used today, 14:02", "12 overdue · JOD 4,860".
- **Sentence case** everywhere. No exclamation marks. No emoji in product or partner material.
- **Numbers**: Western digits, JOD with 3 decimals (JOD 301.600), dates as 27 Oct 2026 (27/10/2026 where space is short), 24-hour times.

Arabic interface

Simple Modern Standard Arabic in short sentences, written and reviewed by a native speaker before it ships; never unreviewed machine translation. The Arabic in the templates is working copy for that review.

Agents

- **Describe the action, not the agent**: the agent named by role, then who it acts for, then what it did or proposes. "Billing assistant for Amro · Sent 12 payment reminders."
- **Names by role**: Billing assistant, HR assistant, Front desk. No human first names, no "Whity AI".
- **No "I", no feelings, no apologies.** A proposal title is an imperative with a count: "Send payment reminders to 12 customers".
- **Documents an agent sent say so** in their footer, with the person it acted for.

Errors

Say what happened and what to do. No apology, no blame, one next step. Technical detail and a copyable reference go behind "Details".

Instead of	Write
Error 403	You don't have permission to edit roles. Ask an owner.
Something went wrong. Please try again later.	Invoices didn't load: the connection timed out. Try again.
Success! Your changes have been saved.	Branding saved. Your team sees it on their next page load.
Our AI agent is working its magic…	Billing assistant is reading 48 open invoices.
Are you sure?	Delete Example Bakery? This deletes the workspace for everyone in it.

Words

Use	Avoid
agent, assistant (named by role)	AI employee, copilot, bot, magic
approve, ask first, allowed, scope	autonomous, hands-free, set and forget
platform, workspace, app	suite, solution, ecosystem, synergy
a button that names the action, such as "Issue invoice"	Submit, OK, Confirm, Proceed
Built on Whity	Powered by AI, AI-first
your brand, your system (to end users)	white-label (fine with partners)

The name

"Whity", one word, capital W, in Latin letters in every language. Products are Whity plus one noun: Whity Core, Whity SDK, Whity Render, Whity ID, Whity Front Office. Third-party plugins name the job first: "Invoicing for Whity". In mockups, use clearly fictional names (Example Bakery) or placeholders ([Tenant name], [price]).

SECTION 08

Arabic and right-to-left

Whity has **no Arabic name, logo, tagline or brand copy**. The product ships a full Arabic interface, and documents can lead in Arabic, because the platform is built for companies in the Arab world.

Layout

- Set `dir="rtl"` and `lang="ar"` on the page. Components use logical properties, so the shell, rows, menus, drawers, breadcrumbs and tabs mirror on their own. The drawer and the mobile sidebar slide in from the right.
- Direction icons mirror (chevrons, `arrow-right`, `send`, `undo`, `external`, `logout`). **The mark, the lockup and the plane never mirror**: the lockup stays left to right with the mark on the left, and the plane always sits down-left.
- Numbers, money inputs, one-time codes, IBANs and codes stay left to right inside Arabic lines, isolated with `<bdi>` or Unicode isolates.

Type

- **Noto Sans Arabic at the same size as Latin** (100%), line height 1.7 for body and 1.5 for labels and titles; no letter spacing, no uppercase.
- **Document titles in Readex Pro's Arabic design** (E.35), as Latin titles are; product screens stay in Noto Sans Arabic.
- **Western digits 0–9** everywhere. Inputs accept Arabic-Indic digits and the Arabic decimal mark as typed and store Western digits.
- The name stays "Whity" in Latin letters, isolated with `<bdi>`. Never a transliteration.

Dates and calendars

- Levantine month names in Arabic: كانون الثاني، شباط، آذار، نيسان، أيار، حزيران، تموز، آب، أيلول، تشرين الأول، تشرين الثاني، كانون الأول. Dates read "27 تشرين الأول 2026".
- Calendars start on Saturday and grey Friday and Saturday as the weekend; working days run Sunday to Thursday. Both can be changed per tenant.

Documents


Either language can lead, chosen per customer: Arabic content with small English labels (the layout mirrors), or English with small Arabic labels. Amounts are written in words in both languages; the Arabic follows accounting usage (tafqeet) and must be reviewed by an Arabic-speaking accountant before shipping. See section 16.

Words and review

- Each language is named in its own script: "English", "العربية".
- Interface strings are written by a native speaker in clear Modern Standard Arabic, in short sentences, and reviewed before shipping. Every component takes `labels` for its Arabic strings.
- whity-core's catalogues (`database/i18n/ar/`) hold the shipped strings.

IN USE

Arabic, right to left

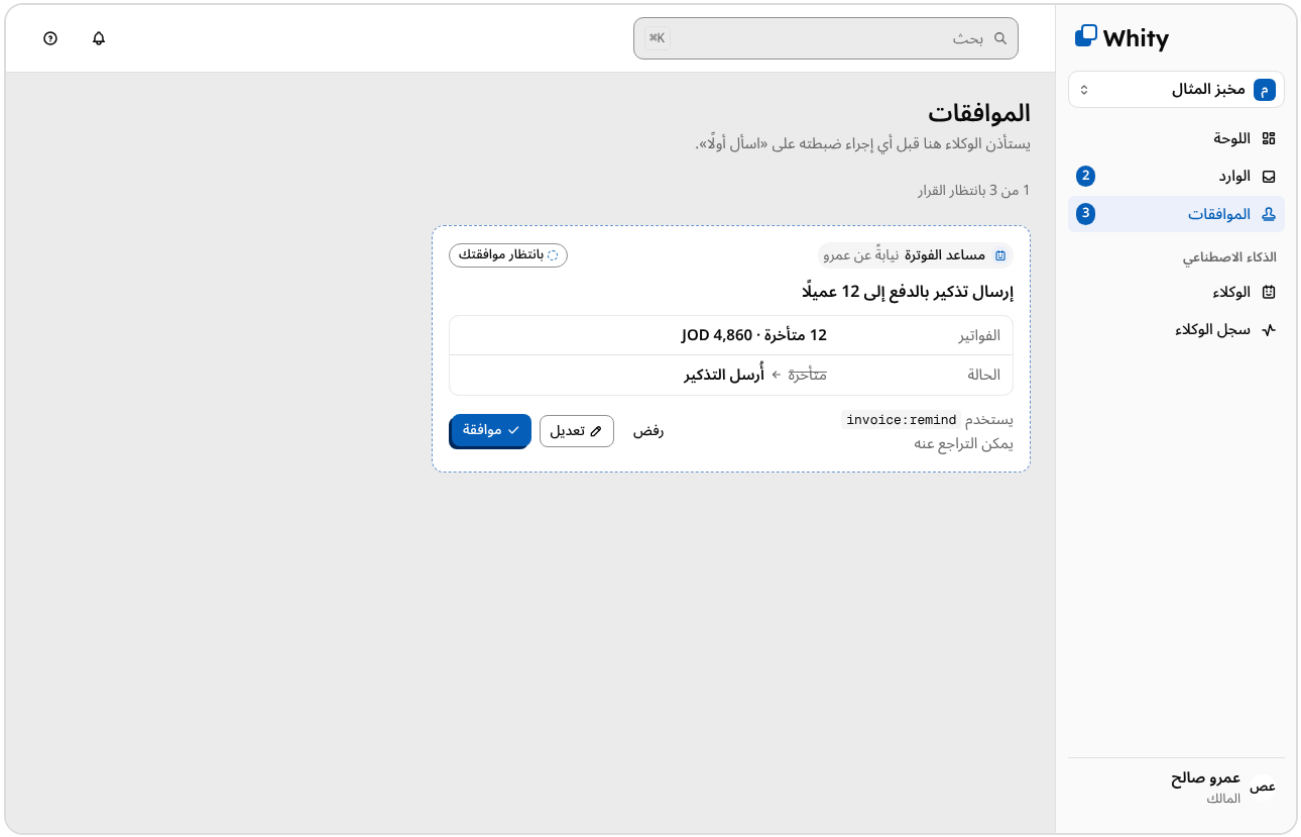

Approvals in Arabic



Tax invoice, Arabic first

SECTION 09

White-label and partners

A partner sells its own product; Whity stays underneath. The tenant's brand leads every screen, email and document its people and customers see, and Whity appears only where the partner chooses to say so, as a fact.

What a tenant or partner changes

- **Name, logo, favicon and domain**, per tenant (`admin/settings/branding`, template `TplAdminBranding`). The logo slot (`TenantLogo`) takes an upload or falls back to initials on the main colour.
- **One main colour.** The rest is derived from its hue (decision 2.8): the colour on dark (L 0.70), the plane (L 0.30) and the tint (L 0.96). The label on it is white or near-black, whichever passes 4.5:1; if neither does, the colour is darkened and the admin sees what changed. Each derived value can be overridden.
- The tokens a tenant theme sets: `primary`, `brand`, `ring`, `chart-1`, `primary-tint`, `primary-tint-foreground`, `sidebar-primary`, `sidebar-primary-foreground`, the four plane shadows and `doc-accent` (the colour on printed titles, the same in light and dark), plus `primary-foreground` (white or near-black, whichever reaches 4.5:1). `Whity.tenantTheme(colour, 'light' | 'dark')` returns all of them from one colour; `.wy-theme-partner` in `bundle.css` is the same set written out for the demo tenant (burnt orange `#b74c05`).
- **Sign-in, emails and documents** carry the tenant's logo and name (`TplAuthSignIn`, the document templates).

What stays

- Greys, status colours, type, shape, layout and components.
- The plane rules, approvals, scopes and attribution for agents. A partner can't remove them: they protect the partner's own customers.

Built on Whity

- The `BuiltOnWhity` component or `built-on-whity-light.svg` / `-dark.svg`: the 16px mark and "Built on Whity", linking to whity.dev.
- Optional for partners. When used: in the footer, the About screen or the sidebar foot; never in a header, never larger than the partner's logo, never in the partner's colour.

Co-branding (Whity beside a partner)


- The host leads in reading order. Separate the logos with a 1px `border` line as tall as the mark, with 3 m of space on each side.
- The partner's logo is no taller than the Whity mark and no wider than the Whity lockup.
- Never redraw or recolour a partner's logo, and never build a combined lockup.

Trademark (from TRADEMARK.md)


Allowed without asking	Needs written permission	Never
"Built on Whity", "compatible with Whity", "Whity hosting"	Naming a product, company or domain "Whity" or something close	Registering "Whity" or a similar mark or domain
The Built on Whity badge	Using the Whity logo as your own branding	Suggesting Whity endorses you when it doesn't
Plugins named for their job: "Invoicing for Whity"	Shipping modified Whity Core still called "Whity"	Presenting a white-labelled product as "Whity"
Tutorials, reviews, talks, critical or not	"Official partner", "Whity certified", "Whity Enterprise"	Naming Whity as the source of your warranty or support

IN USE

A partner’s brand on the same platform

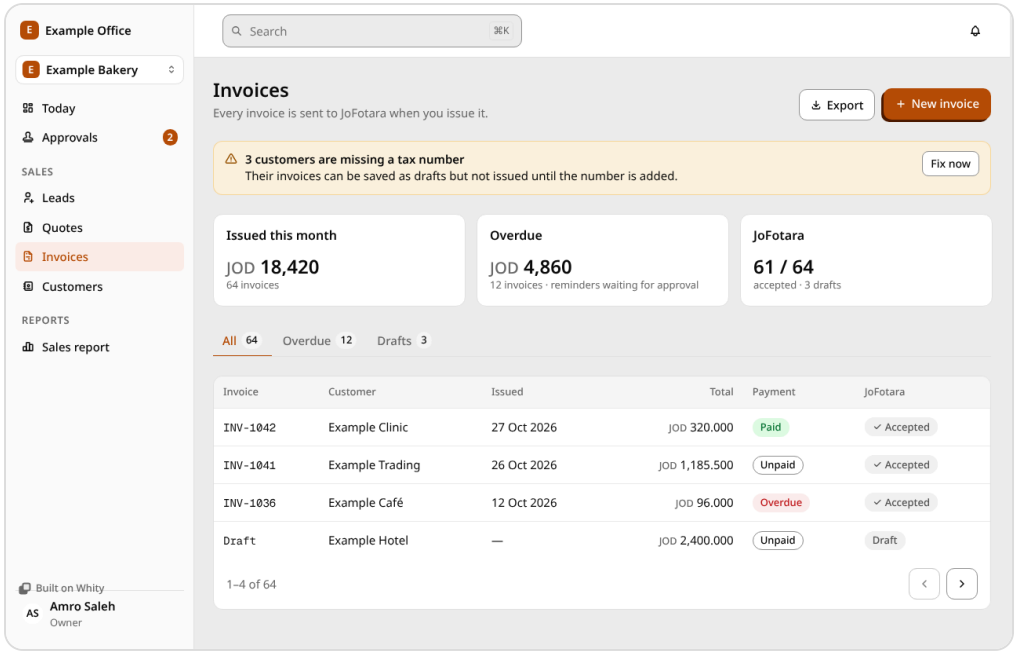


Invoices in a partner’s brand

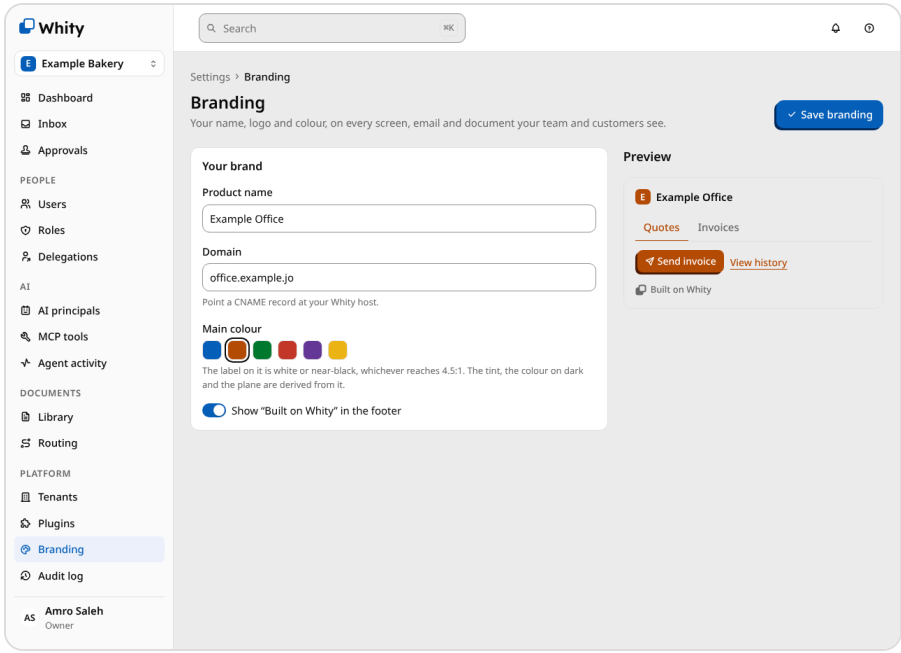

Branding settings with live preview

IN USE


Emails in the workspace’s brand

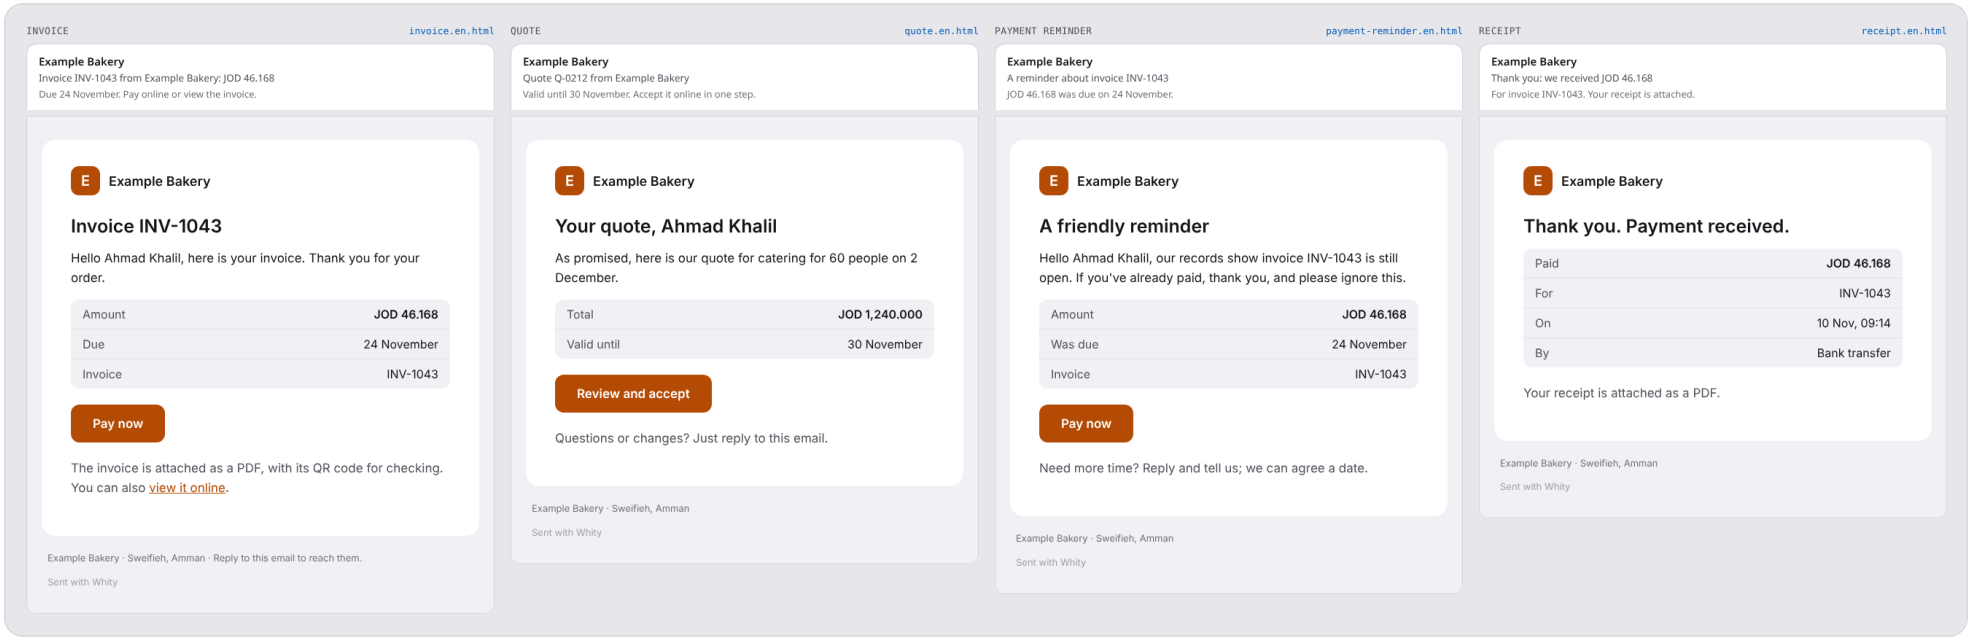

Invoice, quote, reminder and receipt, from Example Bakery

IN USE

Emails in Arabic

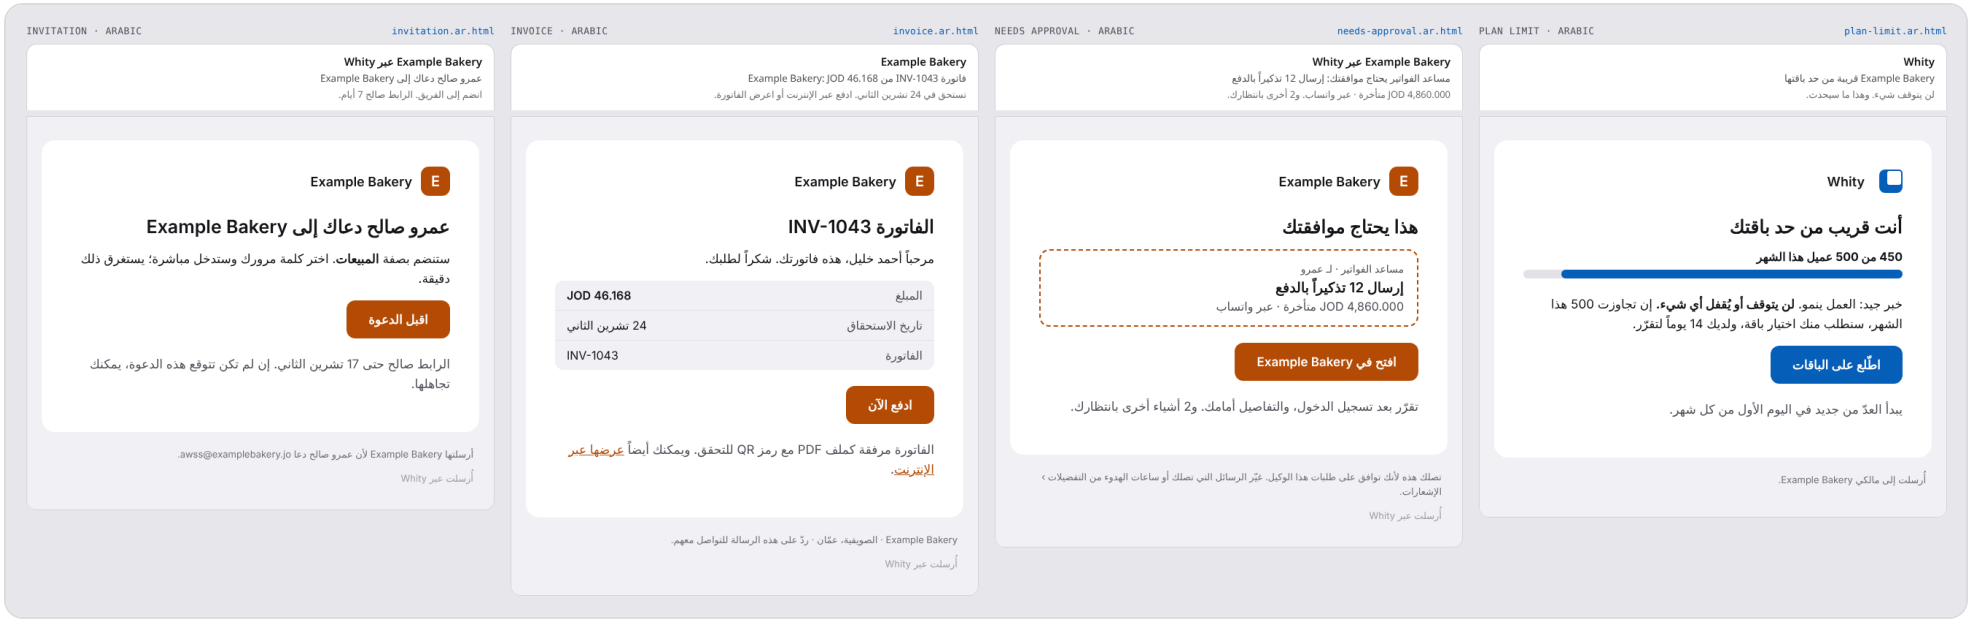

Invitation, invoice, approval and plan limit in Arabic

SECTION 10

Patterns

Two patterns, both from the mark, and one meaning for the dashed line.

Sheets on paper (everyday)

White sheets with soft corners on the grey ground, one of them on its plane. Use it for social posts, slides, document covers and website sections: one sheet carries the message; the plane sits under the one thing that matters. Headlines in Readex Pro 600, body in Noto Sans. See Social and presentation.

Blueprint (how it works)

A Whity Blue ground (`blueprint`) with a measured grid of white lines (16px fine, 80px major: `blueprint-line`, `blueprint-line-strong`), drawn boxes in 1.5px white lines and mono labels like a technical drawing ("SHEET 01 · ..."). It does not invert with the theme.

- **Use** for architecture, tenancy, the plugin boundary, the MCP and agent surface, request flows: in docs, the developer site and the technical part of a pitch.
- **Never** for pricing, policy, marketing claims or a tenant's own pages.
- Component: `Blueprint` (label, title, children); Tailwind utility `bg-blueprint-grid`.

Dashed means "not yet"

In both patterns and in the product, a dashed line is something that has not happened: an agent proposal waiting for a person, an optional step, an undone action, an empty slot. Approving sets it down: solid, on the plane.

SECTION 11

Products, names and plans

Whity is a branded house: one name and one plain noun that says what each thing does.

Name	What it is	Licence and price	Status
Whity Core	The platform: identity, tenants, permissions, documents, forms, plugins, MCP server	AGPL-3.0 with the plugin exception, free	Built
Whity SDK	The plugin SDK and UI kit	MIT, free	Built
Whity Cloud	Whity hosted for many companies at app.whity.dev, with Whity's own apps	Free up to the limits, then plans	Live
Dedicated hosting	A company's own installation, hosted by Whity and managed by the company; needed for plugins and custom code	Flat monthly fee by size	Planned
Whity Render	Pixel-exact PDF and image export for documents, invoices, labels (the 13 document templates in section 16)	Closed, paid service, hosted by Whity	Inside Core today; to split out
Whity ID	Single sign-on and identity provider (OIDC)	Closed, paid service, hosted by Whity	Planned
Whity Front Office	First app: leads, quotes and compliant invoices	Closed, paid app	Proposed
Whity Marketplace	Partners and developers sell plugins	Revenue share	Later

When a plan doesn't include a feature, the screen shows it greyed behind a `PlanGate` card naming the plan: owners can upgrade, everyone else can ask an owner. Never hide it (decision 2.1d).

Rules

- Whity + one noun, in English in every interface language. No "AI", "Pro", "Plus" or version numbers in a product name.
- Third-party plugins name the job first: "Inventory for Whity", "WhatsApp Connector for Whity".
- Partner products carry the partner's own name, with the optional Built on Whity badge.
- Features are lower-case nouns, not brands: approvals, scopes, activity, branding, delegations.
- Agents are named by role, by the customer: "Billing assistant", "Front desk". Never a human first name.

Positioning

Company-first (BM.1): **"Your company's work in one place. Agents prepare it, you approve it."**
Builders and agencies come second: **"Run it, or sell it as your own."**

Three ways to run Whity (BM.2)

	Whity Cloud	Dedicated hosting	Own server
Where	app.whity.dev, shared	Its own installation, hosted by Whity	The company's servers
Who runs it	Whity	Whity hosts; the company manages its Whity	The company
Apps	Whity's own apps	Plus Marketplace plugins and custom code	Plus Marketplace plugins and custom code
Pays for	A plan above the free limits	A flat monthly fee by size (BM.7), plus services above the free limits	Services above the free limits

Free, then plans (BM.3, BM.4)

Whity's paid services (Whity ID, Whity Render, the mobile app, agents) are free up to the limits on every installation, ours or theirs. **Staff** are the company's own accounts; agents don't count. **Customers** are people outside the company who sign in with Whity ID, book, use the customer app or portal, or pay online, counted per month; contacts stored in records are always unlimited.

Plan	Staff	Customers a month	White-label
Free	5	500	Logo and colour
Team	25	5,000	Plus own web address, sign-in page and email sender, no "Built on Whity"
Business	100	25,000	Plus own app in the stores (M.16)
Larger	Quote	Quote	Everything, with an on-premises licence if needed (BM.8)

Extra staff or customers come in packs. These numbers are the starting point to test with first customers. Agent work is base plus usage. Plan names and prices stay `[plan name]` and `[price]` in every mockup until they are set.

Plans are entitlement bundles (ADR 0010) with a payment wall that defaults to "warn" (ADR 0011). When a plan doesn't include a feature, the screen shows it greyed behind a `PlanGate` card naming the plan (2.1d).

White-label on every level (BM.5, BM.6)

Logo and colour are free. Above that, every Whity service is white-labelled down to the domain: sign-in at `id.examplebakery.jo`, documents and their QR check links, emails from the company's own sender, notifications and the customer app. When it's on, Whity's name never shows to the company's customers.

Who hosts the services (BM.8, BM.9)

Whity hosts Whity ID and Whity Render for every installation by default. Regulated companies (banks, clinics, government) and large partners can buy an on-premises licence instead (minimum contract, usage reported back). Self-hosted installations keep working for a while if Whity ID can't be reached. Hosted services run in the EU (servers, database, files and backups; WS.18). A company that needs its data inside its own country gets a dedicated installation there for a fee, or runs Whity on its own servers and pays for the Whity services it uses.

Partners (BM.10)

Agencies resell Whity to their clients under their own brand, at a partner price they mark up and invoice themselves, or for a monthly share of what their clients pay Whity.

SECTION 12

Engineering handoff

Everything a web or Flutter team, or a coding agent, needs to build Whity screens and bring whity-core in line with the brand. `tokens.json` is the source of truth for this system; if this page and `tokens.json` ever differ, `tokens.json` wins. Every value traces back to `00-decision-register.md`.

Files

Path	For	What
`tokens.json`	all	Colours (Light, Dark), type, spacing, radii, sizes, shadows, plane, motion, each with a usage note
`handoff/tokens.flat.json`	all	The same as plain name → value JSON
`handoff/web/tokens.css`	web	CSS variables for both themes (`[data-theme]`, `.dark` and the OS setting), `@font-face`, type classes, motion
`handoff/web/tokens.ts`	web	A typed token object
`handoff/web/theme.css`	web	Tailwind v4 `@theme` additions: `shadow-plane*`, `shadow-float`, the tint, status text and tint colours, `bg-blueprint-grid`, `plane-lift`
`components/bundle.js`, `bundle.css`, `index.d.ts`	web	Reference React 18 components (`window.Whity`), their styles and types
`fonts/*.woff2`	all	Noto Sans, Noto Sans Arabic, Geist Mono, Readex Pro 600
`handoff/editor/whity-document.ts`, `README.md`	web	The document editor's contract (document model, blocks, marks, comments, suggestions, plugin block registry, saved blocks, props, publish checks) and its TipTap/ProseMirror mapping (section 18)
`handoff/flutter/lib/whity_brand.dart`	Flutter	`WhityBrand` ThemeExtension: plane, plane deep, mark sheet, blueprint, plane shadows, logo sizes, durations. Use beside `whity_tokens`
`handoff/flutter/pubspec_fonts.yaml`	Flutter	Font entries
`handoff/icons/ink/*.svg`, `paper/*.svg`, `icons.json`	all	The 156 icons for light and dark grounds, their Tabler names and which mirror
`handoff/logos/`	all	Every cut and colourway (SVG), the lockups, the app icon, `favicon.svg` and `favicon.ico`, PNG exports, Built on Whity
`handoff/motion/*.json`, `README.md`	all	The 31 Lottie files (LT.1–LT.4): brand stories, website spots, and the app's moments (empty, done, first run, waiting, errors), with the web player and Flutter code
`handoff/emails/*.html`, `README.md`	server	The 15 emails in English and Arabic (EM.1), with placeholders

Web (Next.js, Tailwind v4, shadcn)

1. Replace the values in `@amroksaleh/tokens` (soon `@whity/tokens`) with `tokens.json` v3: it adds the status text and tint colours, the selected tint, the chart palette, the control sizes and the motion tokens, and fixes contrast (see the table below).
2. Import `handoff/web/theme.css` after it for the plane, the soft float shadow and the blueprint utilities.
3. Restyle `packages/ui` to the components here: class names and states in `bundle.css` are the reference. Keep real semantics: `<button>`, `role="switch"`, `aria-current`, `aria-pressed`, `aria-sort`, `aria-expanded`.

Flutter

Add `whity_brand.dart` next to `whity_tokens`, register `WhityBrand.light` / `.dark` in `ThemeData.extensions`, and draw the plane with `WhityBrand.planeShadow(...)`. Offsets are physical (`Offset(-3, 3)`): the plane never mirrors in RTL. Use tabular figures (`FontFeature.tabularFigures()`) for numbers.

Changes whity-core needs

#	Where	Change	Decision
1	`src/design/tokens/base.json`	Adopt tokens v3: `muted-foreground` oklch(0.52), `input` oklch(0.66) / dark oklch(0.52), the status triplets, `primary-tint`, `divider`, `table-header`, `chart-2…6`, `plane-deep`, `mark-sheet`, the blueprint colours; regenerate CSS, JSON and Dart	2.5, 2.6, 2.7
2	Type	15px default (`text`, A.1), titles 24 / 20 / 18 at 600, no 700; Readex Pro only for brand headlines and document titles	3.1–3.6
3	`button`, `input`, `select`	Heights 40 (32 small, 44 large), corners ¼ of the height, table rows 48 (A.1); the outline secondary button; the plane on the default button only	4.1, 4.2, 7.1
4	`badge`, `alert`, nav, tabs	Tinted badges and alerts from the status tints; selected nav and rows on the tint; tabs underlined. Remove Tailwind palette classes (`blue-500`, `emerald-600`, `purple-…`)	7.3, 7.4
5	`card`, menus, dialogs	Cards: 1px border, no shadow. Floating layers: `shadow-float`.	4.4, 4.6
6	`data-table.tsx`	Checkbox selection with the bulk bar (count, money total, actions), sort, sticky header, row menu, totals row, loading/empty/error	7.6
7	App shell	240px sidebar, 56px rail below 1024px, drawer below 768px; the tenant logo slot and switcher; Built on Whity optional	4.5
8	Icons	Agent icon to Tabler `robot-face`; 16px icons at stroke 2.25	5.1, 5.2
9	brand.whity.dev	Replace the logo files with `handoff/logos/`; list Whity Blue as `#0961bb`	1, 2.1
10	Server	Agent proposals: when a tool call needs a permission set to "Ask first", store a proposal (tool, arguments, diff, scope, undo window) instead of executing; approve executes it as the granting person's delegate; Undo while the tool's window is open	7.5
11	Server	Per-permission mode (off · ask · allow) on AI principals, stored with the credential's scope	7.5
12	Whity Render	The `Doc` rules and the 13 templates; amount in words; JoFotara QR and reference on fiscal documents	6
13	npm, GitHub	Move `@amroksaleh/*` packages and repos to a Whity organisation	
14	Every screen	Build each screen from its card (sections 19–25, app map): the patterns of section 21 (list, record, states, confirming), plain words, names never ids, money in normal units	P, A, F, D, AI, W
15	Preferences	Text size (Standard 15px, Larger 17px) and Show technical details, stored per person	W.3, A.3

Component map

Here	In packages/ui
Button, IconButton, Tooltip	`button.tsx`, `tooltip.tsx`
Input, Textarea, Select, Combobox, Checkbox, RadioGroup, Switch	`input.tsx`, `textarea.tsx`, `select.tsx`, `command.tsx`, `checkbox.tsx`, `radio-group.tsx`, `switch.tsx`
DatePicker	`calendar.tsx` + `popover.tsx`
MoneyInput, OtpInput, SearchField, TenantLogo, TenantSwitcher	new (MoneyInput beside `money/`)
Tabs, Breadcrumb, Pagination, Segmented	`tabs.tsx`, `breadcrumb.tsx`, `pagination.tsx`, `toggle-group.tsx`
PageHeader, AppShell	`page-header.tsx`, `app-sidebar.tsx`, `page-shell.tsx`, `top-nav.tsx`
DataTable	`data-table.tsx`
Card, Dialog, ConfirmDialog, Drawer, Menu, Popover	`card.tsx`, `dialog.tsx`, `alert-dialog.tsx`, `sheet.tsx`, `dropdown-menu.tsx`, `popover.tsx`
Toast, ToastRegion	`sonner` / `toast.tsx`
Badge, Alert, EmptyState, Skeleton, Avatar	`badge.tsx`, `alert.tsx`, `empty-state.tsx`, `skeleton.tsx`, `avatar.tsx`
DescriptionList, Timeline, Money, PluginCard	new, `money/`, `plugin-card.tsx`
Mark, Lockup, BuiltOnWhity, Blueprint, Icon	new
ActorChip, ActionProposal, AgentActivity, ScopeGrant, ApprovalQueue, UndoBar	new (need server items 10 and 11)
Doc, DocPages, DocTable, DocKpis, DocBars, DocNote, DocSign, DocAmount, DocPreview	Whity Render (new)
ButtonGroup, SplitButton, ToggleGroup	`button-group.tsx` (new), `dropdown-menu.tsx`, `toggle-group.tsx`
PhoneInput, FileUpload	new
CommandPalette, Stepper	`command.tsx` in a dialog, new
BarChart, LineChart, DonutChart	new (or Recharts styled to these specs; `chart.tsx` if present)
AgentRunStatus, PlanGate	new

Agent brief

When you build a Whity screen: read `README.md` first; use the tokens, never raw colours; Noto Sans at 15px, never below 13px, never 700; plain words, with codes only behind Show technical details; common actions as labelled buttons; one filled main button per view, and the plane only under it, approved agent work and hovered clickable cards; controls 40px with ¼ corners; cards bordered, floating layers with `shadow-float`; Tabler icons by the names in `icons.json`; every agent action attributed with `ActorChip` and either allowed by its scope or shown as an `ActionProposal`; Undo instead of "Are you sure?" where it can be undone; Western digits, and money to its currency's own decimals (JOD has 3); the name always "Whity" in Latin letters; fictional names or placeholders for companies, plans and prices.

SECTION 13

App map

The screens of whity-core's web app as they exist in `web/app`, grouped as the sidebar groups them, with IDs for design work. **Template** names the template in this system; **Needs** marks server work for the agent features.

Navigation

Sidebar groups: (top) Dashboard · Inbox · Approvals — People — AI — Documents — Platform — Settings. The tenant switcher sits under the logo; the user and account menu at the foot. The system tenant (id 0) sees Platform; tenants see their own items. Plugin items arrive from `GET /api/navigation`.

Settings (owner decision D1, 31 Oct 2026). Settings is one item at the foot of the sidebar. It opens a settings area with its own grouped sub-nav: Workspace (General, Branding) · Sign-in and security (Security, SSO, Sign-up, Public forms) · Email (Email, Email domains) · Data (Storage, Tags, Languages, Translations) · Advanced (Feature flags, Error tracking). Every page keeps its route and permission. The personal account (U04) stays in the user menu, not the sidebar. Drawn as the left column of every `TplSettings*` card (WHIT-826, SC); on a phone, `PwSettings`.

Screens

ID	Screen	Route	Template	Needs
Overview				
A01	Dashboard (home)	`/dashboard`; `/admin` redirects here	`TplHome`, `TplHomeMember`; operators' platform cards from `TplAdminDashboard`; shell states `AppShellCollapsed`, `AppShellMobile`	section 20; one merged waiting list (Inbox and Approvals), app home cards in the plugin manifest
A02	Inbox (documents awaiting a decision)	`/admin/inbox`	`TplInbox`	section 21; states composed by the app
A03	Approvals (agent proposals)	new: `/admin/approvals`	`TplAgentApprovals`, `TplAgentApprovalsAr`, `ApprovalQueue`	server 10
A03a	Messages (conversations with customers)	new: `/admin/messages`; a customer's own at `/messages`; public chat at `/chat/{workspace}`	`TplMessagesInbox`, `TplChatBox`, `TplSettingsMessages`; phone `PwMessages` (SC.1–SC.3)	ADR 0016; settings at `/admin/settings/messages`
A04	Calendar (day, week, month; new booking; booking sheet with Move and Cancel; events)	`/calendar`	`TplCalendarStaff` (SU.3); phone `PwCalendar`	section 21; ADR 0017; times in the workspace's zone, week from `week_start`, weekend from `weekend_days`
A04b	Calendar services · service	`/calendar/services`, `/calendar/services/[id]`	`TplCalendarStaff` (Services tab)	section 21; Overview only (no access list or history in the API yet)
A04c	Hours and time off	`/calendar/hours`	`TplCalendarStaff` (Hours and time off)	section 21; own hours on `calendar:write`, anyone's on `calendar:manage`
A04d	Calendar settings	`/calendar/settings`	`TplCalendarStaff` (Settings tab)	section 21; `calendar:manage`
A04e	Public booking page · the customer's booking (move, cancel)	`/book/[workspace]`, `/booking/[token]`	`TplBookingPage` (booking); `TplBookingManage` (the customer's booking, SU.10); emails `EmailBookings`	built on the `/f/[slug]` frame (`TplFormPublic`); no sign-in; times in the workspace's zone, and the visitor's too when it differs; ADR 0017 section 6
People				

ID	Screen	Route	Template	Needs
A10	Users · user	`/admin/users`, `/admin/users/[id]`	`TplUsers`, `TplUserRecord`, `TplUserRecordAr`	section 21
A11	User groups	`/admin/user-groups`	`TplUserGroups`	section 21
A12	Roles · role	`/admin/roles`, `/admin/roles/[id]`	`TplRoles`, `TplRoleRecord`	section 21
A13	Organisational units	`/admin/ous`	`TplOrgUnits`	section 21
A14	Delegations	`/admin/delegations`	`TplDelegations`	section 21
A15	Relations	`/admin/relations`	`TplRelations`	section 21
A16	Registrations · invitations	`/admin/registrations`	`TplApprovalGating`	section 21; request dates
AI				
A20	Agents · connected AI apps	`/admin/ai-principals`	`TplAgents`, `TplAgentPresets`, `TplConnectedApps`, `TplConnectWizard`	section 24; agents API exists, pages new; AI principals renamed
A21	Agent · connected app (what it may do)	new: `/admin/ai-principals/[id]`	`TplAgentRecord`, `TplAgentRecordAr`, `TplAgentInstructions`, `TplAgentScope`	section 24
A22	What AI can do (was MCP tools)	`/admin/mcp-tools`	`TplWhatAICanDo`	section 24; technical columns behind Show technical details
A23	Agent activity	new (from audit logs)	`AgentActivity` (filter by agent), `Timeline`, `UndoBar`	
Documents				
A30	Document library · document	`/admin/document-library`, `/[id]`	`TplLibrary`, `TplDocRecord`; notes and wiki: `TplNotesWiki`	section 23; record tabs Document, Routing, History, Verification
A31	Document templates	`/admin/document-templates`	`TplDocTemplates`	section 23

ID	Screen	Route	Template	Needs
A32	Route templates · routing	`/admin/document-route-templates`, `/admin/document-routing/[documentId]`	`TplRouteTemplates`, `TplFlowEditor`, `TplDocRouting`, `TplDocRoutingAr`	section 23; circulation is the record's Routing tab
A33	Document designer	`/admin/documents` (editor)	`TplDocDesigner`; the Document editor cards (section 18)	the editor, built from `handoff/editor/`
A34	Forms · form builder · public form · my submissions	`/admin/x/forms-builder`, `/admin/x/forms-catalog`, `/forms/[id]`, `/f/[slug]`, `/admin/x/my-form-submissions`	`TplFormsManage`, `TplFormBuilder`, `TplFormBuilderAr`, `TplFormResponses`, `TplFormsCatalog`, `TplFormFill`, `TplFormPublic`, `TplFormPublicStates`, `TplMySubmissions`	section 22; server-side drafts; translatable form text
Platform				
A40	Tenants · tenant	`/admin/tenants`, `/[id]`	`TplTenants`	section 25; server-side search; "workspace" in the interface
A41	Plugins: Store and Installed tabs (one sidebar item)	`/admin/plugins`, `/admin/plugins/store`, `/admin/plugins/store/<plugin>`	`TplPluginStore`, `TplPluginDetail`, `TplPluginInstall`, `TplPluginsInstalled`; `PluginCard`	section 19
A42	Billing · plans	`/admin/billing`, `/billing`	`TplBilling`, `TplBillingAr`, `TplPlans`	section 25; money in normal units
A43	Promotions	`/admin/promotions`	`TplPromotions`	section 25; JOD default
A44	Audit logs · errors · System	`/admin/audit-logs`, `/admin/errors`, `/admin/stats` (System, operators only, H.3)	`TplAuditLog`, `TplErrors`, `TplSystem`	section 25
A45	Languages · translations	`/admin/languages`, `/admin/translations`	`TplSettingsTranslations`; languages in `TplPlatformSettings`	section 25
A46	Tags · tag groups	`/admin/tags`, `/admin/tag-groups`	`TplSettingsTags`	section 25

ID	Screen	Route	Template	Needs
A47	Notifications	`/admin/notifications`	`TplNotificationDelivery`	section 25
A48	Approval gating	`/admin/approval-gating/*`	`TplApprovalGating`	section 21; tier-3 confirmation
Settings				
A50	Branding	`/admin/settings/branding`	`TplSettingsGeneral`, `TplAdminBranding`	section 25; settings sub-nav
A51	Email · email domains	`/admin/settings/email`, `/email-domains`	`TplSettingsEmailDomains`; email in `TplPlatformSettings`	section 25
A52	Security · SSO · sign-up	`/admin/settings/security`, `/sso`, `/signup`	`TplSettingsSecurity`, `TplSettingsSSO`	section 25
A52b	Public forms	`/admin/settings/public-forms`	`TplSettingsPublicForms` (SC.13)	section 25
A52c	Sign-up for a workspace's customers	`/admin/settings/customer-signup`	`TplSettingsSignup` (SC.11)	section 25; the operator's platform sign-up stays `/admin/settings/signup`
A53	Storage · feature flags · error tracking	`/admin/settings/storage`, `/feature-flags`, `/error-tracking`	`TplPlatformSettings`	section 25
Account				
U01	Sign in · register · verify email	`/login`, `/register`, `/verify-email`	`TplAuthSignIn`	
U01b	Two-step code · turn on · recovery codes	`/login` (step 2), `/settings`	`TplAuthTwoStep`	
U02	Forgot · reset password · recovery	`/forgot-password`, `/reset-password`, `/account-recovery`	`TplAuthReset`	
U03	Accept invitation · onboarding	`/accept-invitation`, `/onboarding`	`TplAuthInvite`	
U03b	Join a workspace as a customer	`/join/[workspace]`, `/join/confirm`	`TplJoinWorkspace` (SC.12); emails `EmailJoining`	built on `TplAuthInvite` and the `/f/[slug]` frame

ID	Screen	Route	Template	Needs
U04	Settings · licensing	`/settings`, `/licensing`	`TplAccountPrefs`, `TplAccountSecurity`, `TplLicensing`	section 25; text size preference
U05	Status	`/status`	`TplSystemStates`	
U06	404 · 403 · 500 · offline · maintenance · rate limit	`not-found`, `error`, middleware	`TplSystemStates`; Lottie moments in `TplMoments`	LT.4
Partner apps (built on Whity)				
P01	Front Office: invoices	plugin route	`TplPartnerInvoices`, `DataTableSelect`	Front Office app, JoFotara integration
Documents (Whity Render)				
R01	Quote	Whity Render	`TplDocQuote`	online acceptance
R02	Tax invoice (English or Arabic leads, continuation)	Whity Render	`TplDocInvoice`, `TplDocInvoiceAr`, `TplDocInvoiceLong`	JoFotara QR and reference
R03	Credit note	Whity Render	`TplDocCreditNote`	JoFotara
R04	Receipt (A5)	Whity Render	`TplDocReceipt`	
R05	Statement of account	Whity Render	`TplDocStatement`	
R06	Payment reminder	Whity Render	`TplDocReminder`	agent sending with approval
R07	Delivery note	Whity Render	`TplDocDeliveryNote`	
R08	Payslip	Whity Render	`TplDocPayslip`	HR app
R09	Employment letter	Whity Render	`TplDocEmploymentLetter`	HR app, verification page
R10	Leave approval	Whity Render	`TplDocLeaveApproval`	HR app, audit log
R11	Report	Whity Render	`TplDocReport`	
R12	Letter	Whity Render	`TplDocLetter`	

ID	Screen	Route	Template	Needs
R13	Purchase order	Whity Render	`TplDocPurchaseOrder`	

Mobile (Whity app, 3.0): screens MB01–MB62 are listed in section 26 with their cards; the mobile approval screen is `TmHome` and `TmDecisionVariants`.

The web app on a phone (3.4, PW.1–PW.10, WHIT-1006): under 640px the web app takes the tab bar and the phone app's parts. Navigation, More, Create and the keyboard `PwNav`; lists (sort, select, bulk, filters, nothing found) `PwLists`; document library `PwLibrary`; editor toolbar and modes `PwEditor`; calendar week, month and sub-pages `PwCalendar`; settings menu and deep pages `PwSettings`; read-only builders `PwBuilders`; the desktop sidebar on short screens and the account menu (WHIT-827) `PwShortSidebar`; installing it and notifications (PW.11) `PwInstall`.

Every screen in the built app (inventory of 1 November 2026) now has a design. Agent notifications by email and WhatsApp (`TplAgentNotify`) and the 80 mm receipt (`TplReceipt80`) are drawn in 3.2. Still to draw: the publisher's page and the public marketplace.

Work and operations (3.1)

New areas; routes are for the Whity team to settle. Section 27 has the full coverage table.

ID	Screen	Template	Phone
W01	Tasks (on Taskaat)	`TplTasks`	`TmTasks`
W02	Boards	`TplBoard`	`TmBoards`
W03	Meetings · a meeting · meeting bodies	`TplMeetings`, `TplMeeting`	`TmMeetingsMobile`
W04	Appointments · public booking page	`TplAppointments`, `TplBookingPage`	`TmAppointmentsMobile`
W05	Applications · an application	`TplApplications`, `TplApplication`	`TmApplicationsMobile`
W06	Flows · flow builder (route templates move here)	`TplFlows`, `TplFlowBuilder`	`TmFlowsMobile`
W07	Chat, with people and agents	`TplChat`, `TplChatAddAgent`	`TmChat`
O01	Inventory · a recipe	`TplInventory`, `TplRecipe`	`TmInventoryMobile`
O02	Money · accounts and sales tax	`TplMoney`, `TplLedger`	`TmMoneyMobile`
O03	Subscriptions a tenant sells	`TplSubscriptions`	`TmSubscriptionsMobile`

Additions to existing screens: A03 Approvals list view (`TplApprovalsList`); A48 two-step resets with two admins (`TplGatingTwoStep`); A14 Delegations with I'm away (`TplAway`); on the phone, agent setup (`TmAgentSetup`), the organisation (`TmOrgMobile`), document editing (`TmDocEditMobile`) and the form builder (`TmFormBuilderMobile`).

Near term (3.2)

The roadmap's near-term pages (section 28, N1–N9). Routes are for the Whity team to settle.

ID	Screen	Template	Phone
N1	Contacts · a contact	`TplContacts`	`TmOpsMobile`
N2	Custom fields (Settings › Fields)	`TplCustomFields`	`TmFinanceMobile`
N3	Import from a spreadsheet	`TplImport`	`TmFinanceMobile`
N4	Receiving goods · supplier bill	`TplReceiving`	`TmOpsMobile`
N5	Waste and stock adjustments	`TplAdjustments`	`TmOpsMobile`
N6	Bank reconciliation	`TplBankRec`	`TmFinanceMobile`
N7	Reports	`TplReports`	`TmFinanceMobile`
N8	80 mm receipt (Whity Render)	`TplReceipt80`	
N9	Agent notifications by email and WhatsApp	`TplAgentNotify`	

Websites (3.2)

Public sites, outside the app (section 29). Build-ready pages are in `sites/`.

Site	Pages	Card
whity.dev	Home (companies first, a door for builders)	`SiteHome`, `SiteHomeAr`
whity.dev	Module pages: money, stock, approvals, documents	`SiteModMoney`, `SiteModMoneyAr`, `SiteModStock`, `SiteModApprovals`, `SiteModDocuments`
brand.whity.dev	Brand guide	`SiteBrand`
health.whity.dev	Status	`SiteStatus`
id.whity.dev	Sign in · approve on the phone · account	`SiteId`
docs.whity.dev	Docs home · an article	`SiteDocs`
whity.dev	Security (WS.13, WS.18)	`SiteSecurity`
whity.dev	Partners (WS.15)	`SitePartners`, `SitePartnersAr`
whity.dev	About (WS.16)	`SiteAbout`, `SiteAboutAr`
whity.dev	Contact (WS.19)	`SiteContact`, `SiteContactAr`
whity.dev	Install · privacy · licence · 404 (WS.20–WS.23)	`SiteInstall`, `SitePrivacy`, `SiteLicence`, `Site404`

Motion in the app (LT.4)

Moments	Web	Phone
Empty states, done, first run, waiting, errors, and the Animations setting	`TplMoments`	`TmMoments`

Emails (EM.1)

Build-ready in `handoff/emails/` (English and Arabic, with placeholders).

Group	Emails	Card
Account	Invitation, verify email, reset password, new sign-in, two-step turned off	`EmailAccount`
Money (to a workspace's customers)	Invoice, quote, payment reminder, receipt	`EmailMoney`
Agents	Needs your approval, daily summary	`EmailAgents` (with `TplAgentNotify`)
Workspace and billing	Workspace ready, plan limit, payment failed, Whity receipt	`EmailWorkspace`
Bookings (3.4)	Confirmed (with `.ics`), reminder, moved, cancelled	`EmailBookings`
Forms, signing, messages (3.4)	Form received, form decision (with the printout PDF), sign request, message reply	`EmailForms`
Joining (3.4)	Join approved, join declined	`EmailJoining`
Arabic and dark mode		`EmailArabic`, `EmailDark`

Screens with no card, drawn in 3.4 (SC.1–SC.18)

Screen	Route	Card
Messages inbox	`/admin/messages`	`TplMessagesInbox`, `PwMessages`
Customer chat box	`/chat/[workspace]`, a customer's `/messages`	`TplChatBox`
Settings › Messages	`/admin/settings/messages`	`TplSettingsMessages`
Approvals › Decided, Edit before approving	`/admin/approvals`	`TplApprovalsDecided`
Proposal with an impact plan	Approvals	`TplImpactPlan`
Issuing an agent credential	Agents › an agent	`TplAgentCredential`
whity-agent desktop app	whity-org/whity-agent	`TplWhityAgent`
Saved blocks library	`/admin/document-sources/saved-blocks`	`TplSavedBlocks`
Welcome, create your workspace, need an invitation	`/welcome`	`TplWelcomeWorkspace`
Settings › Sign-up and team invites	`/admin/settings/signup`, `/admin/settings/customer-signup`	`TplSettingsSignup`
Join a workspace	`/join/[workspace]`, `/join/confirm`	`TplJoinWorkspace`
Settings › Public forms	`/admin/settings/public-forms`	`TplSettingsPublicForms`
Passing a plan limit	Billing, and a banner across the app	`TplPlanLimit`
Document themes and the theme picker	Documents › Document themes; a document's settings	`TplDocThemes`
Issuing a document from a template	a record › Issue a document	`TplIssueDocument`
Two-column sign-in	`/login`	`TplSignInTwoColumn`
Whity ID, more screens	id.whity.dev	`TplWhityIdMore`

Form printouts (3.4, FP.1–FP.12)

Surface	Where	Card
A form's printed record and approval certificate	a form response › Print or PDF; issued with the decision	`DocFormPrintout`, `DocFormPrintoutMore`, `DocFormLooks`
Form printout style (paid plans and trials; free = standard)	Documents › Document themes › a theme › Form printouts	`TplFormPrintStyle`
Every print block with its spec	Whity Render, the editor's page view	`DocFormBlocks`

Every surface (3.4, SU.1–SU.10): `verify/[token]` → `TplVerifyDocument`; `billing/return` → `TplPaymentReturn`; `calendar` on a computer → `TplCalendarStaff` (on a phone `PwCalendar`); `agents/[id]/persona` → `TplAgentPersona`; WhatsApp and SMS to customers → `MsgCustomerMessages`; link previews → `SiteShareCards`; `install.sh` output → `SiteInstallerTerminal`; `booking/[token]` → `TplBookingManage`; booking, form, signing, joining and reply emails → `EmailBookings`, `EmailForms`, `EmailJoining`.

SECTION 14

Social and presentation

Every post, slide and cover is one white sheet on the grey ground with the plane under the one thing that matters. One blue element per piece.

Sizes

Format	Size	Safe area
Link preview (Open Graph)	1200 × 630	64 px
Square post	1080 × 1080	80 px
Portrait post	1080 × 1350	80 px
Story	1080 × 1920	250 px top and bottom
Avatar	1000 × 1000 (shown round)	the app icon tile; mark inside the inner 61%
Slide	1920 × 1080	96 px

Rules

- **Headlines in Readex Pro 600** (decision 3.1), sentence case, three lines at most, on the brand scale (49 · 39 · 31 · 25 · 20) or larger multiples for slides. Body text in Noto Sans; an eyebrow in Geist Mono uppercase, tracked +6%.
- The horizontal lockup at the bottom start, at least 20px tall; the mark alone on avatars (the app icon tile).
- One blue element: the plane, a blueprint panel or the lockup. Never a blue headline on a blue panel.
- Technical posts may use the blueprint pattern for a diagram; product posts show a real screen or document on a sheet.
- No stock photos of robots, servers or handshakes. No emoji. Real names only with permission; otherwise Example Bakery and friends.
- Slides: 16:9, one idea per slide, the same sheet-on-paper layout; decks are built from the Slides tools with these tokens.
- Files: `og-image-1200x630.png` and `avatar-1000.png` in Social.

SECTION 15

Agent UI

Whity's promise is AI that sees and acts across a company while a person stays in control. These rules make that visible on every screen where an agent works.

Six rules

1. **Attribute everything.** Every action shows who did it with `ActorChip`: a person (initials), an agent (the robot face on the tint, named by role) with the person it acts **for**, or the system (the mark).
2. **Show before you act.** Anything set to "Ask first" becomes an `ActionProposal`: one line saying what will happen and how much, two examples then "Show all", before → after, the permissions it uses, and the undo window (decision 7.5a). Approve, Edit, Decline.
3. **One at a time.** The approvals inbox is a queue (`ApprovalQueue`): "1 of 3 waiting · oldest first", the next cards stacked behind (7.5b).
4. **Undo is an action, not an apology.** A 10-second toast with Undo, then Undo stays on the activity item for the tool's window with a meter (`UndoBar`, 7.5c). A confirm dialog is only for what can't be undone.
5. **Scope is visible.** `ScopeGrant` shows each `resource:action` permission as Off, Ask first or Allowed. An agent never exceeds the person who granted it, and every change is logged.
6. **Nothing sits on the plane until it has happened.** A proposal is a loose, dashed sheet; approving sets it down (solid, on the plane): one item plays the `approve-set-down` Lottie (1.2 s, LT.4), bulk approval the 200 ms set-down in code.

Proposal states

State	Look
Waiting	Dashed edge, flat, "Waiting for your approval"
Approved	Solid edge in the main colour, on the plane
Declined	Grey, title struck through
Expired	Grey, with "Ask again"
Undone	Dashed again, "Undone by …"

Run status

An agent's run shows what it is doing in plain words (`AgentRunStatus`): **Running** ("Reading 48 invoices", with progress and Stop), **Waiting for approval** (dashed, with Review), **Done**, **Failed** (with what to do next and Try again). A compact pill shows it in the top bar. Reads are quiet in the activity list; changes are filled; errors are red.

The command palette (⌘K) ends with an "Ask an agent" row: what was typed becomes a request, and the agent answers with a proposal to approve (decision 2.1c).

Words

Agents are named by role (Billing assistant, HR assistant, Front desk), never human first names or "Whity AI". They don't say "I" and don't have feelings. Messages put the agent first, then who it acts for, then the action: "Billing assistant for Amro · Sent 12 payment reminders". Documents an agent sent say so in their footer.

Where it shows


- **Approvals** (`TplAgentApprovals`, `TplAgentApprovalsAr`, `ApprovalQueue`).
- **AI principal** (`TplAgentScope`): scope, credential, rotate and revoke.
- **Agent activity** (`AgentActivity`, filterable by agent) and every record's history (`Timeline`).
- **Documents**: the payment reminder, the report and the leave approval credit the agent and the person.

In whity-core today


- **AI principals** are MCP bearer credentials issued to AI clients (`admin/ai-principals`); every MCP call runs with tenant isolation and RBAC.
- **Delegations** pass a subset of a person's permissions to roles or users (`admin/delegations`).
- **Approval gating** exists for password resets and two-step recovery (`admin/approval-gating`).
- Per-action "Ask first" proposals and per-permission modes are new: see Engineering handoff, items 10 and 11.

IN USE

Approvals: one at a time, every state

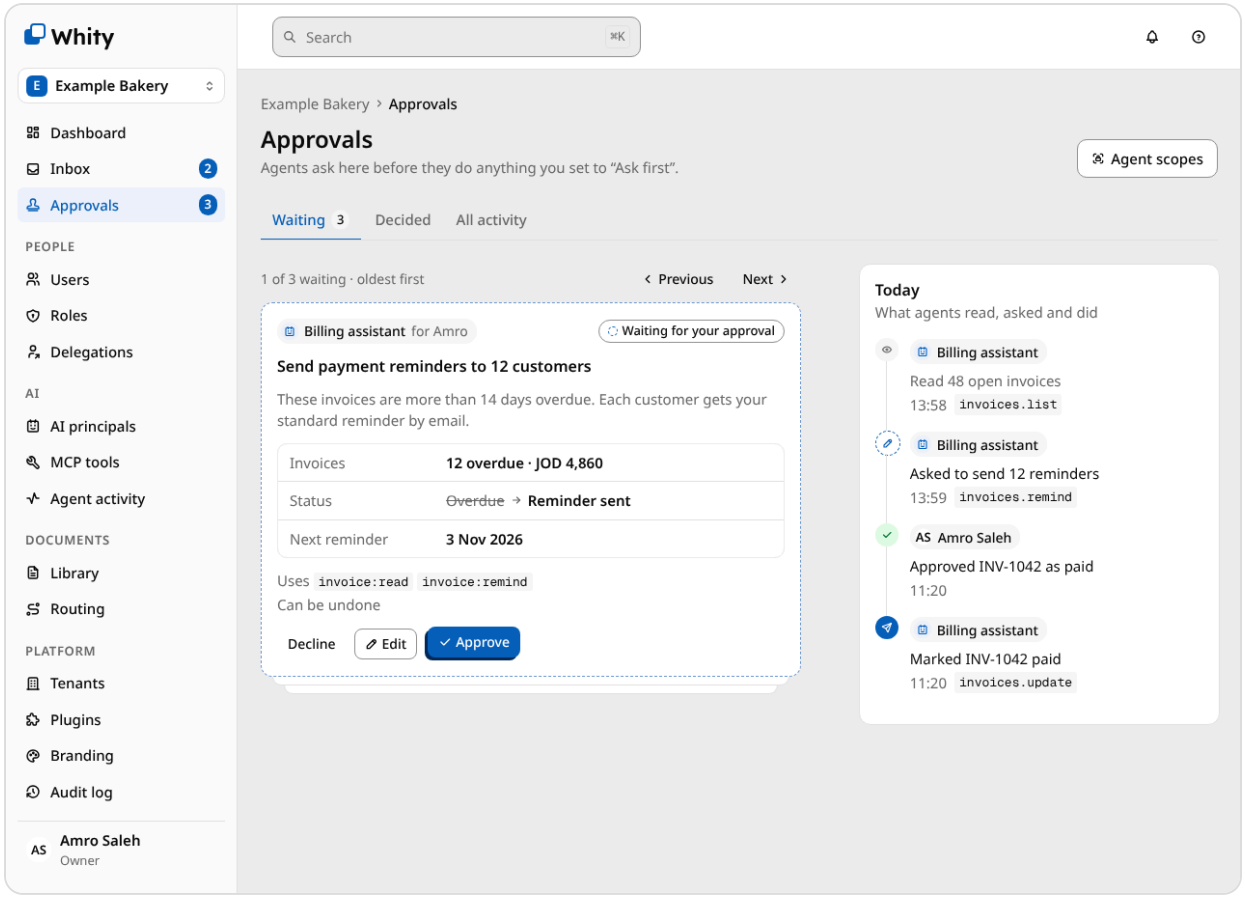


Approvals inbox

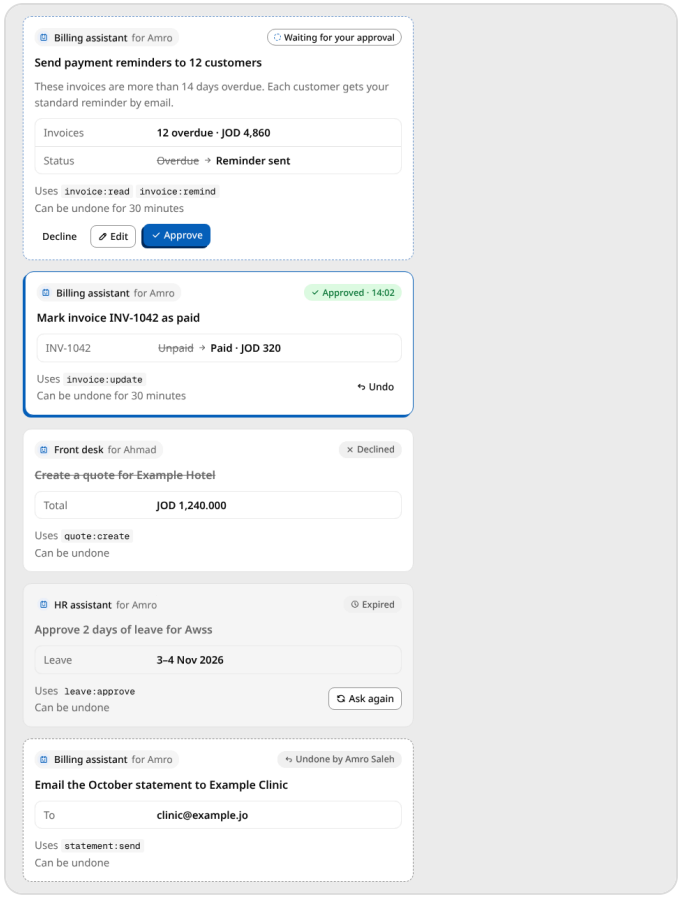


Action proposal: waiting, approved, declined, expired, undone

IN USE


Queue, activity and scope

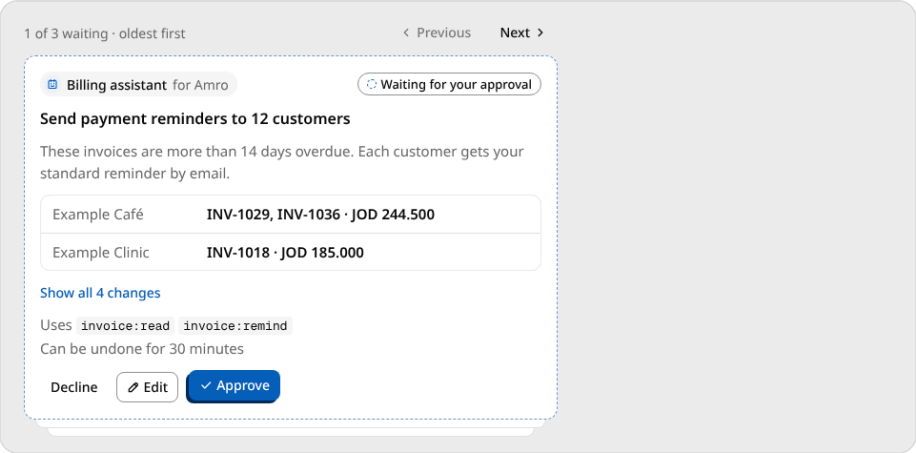

Approval queue

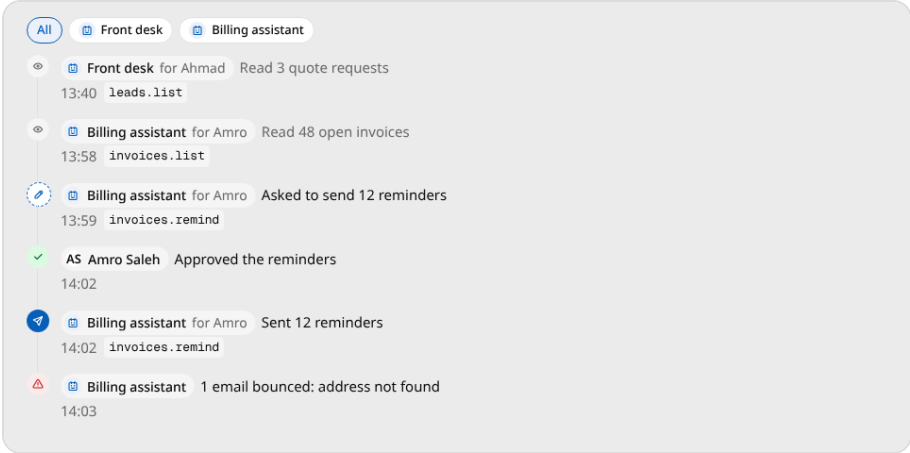

Agent activity, filtered by agent

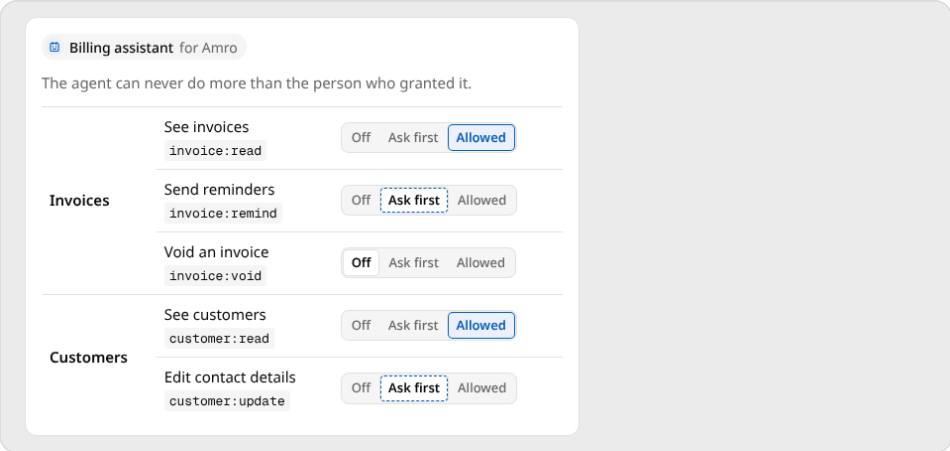


Scope grant

SECTION 16

Documents

Everything Whity Render prints: invoices, letters, payslips, reports. Documents carry the **tenant's** brand, print cleanly in black and white, and read in either language. The rules are decisions 6.1–6.8; the 13 templates were built from them in stage 8.

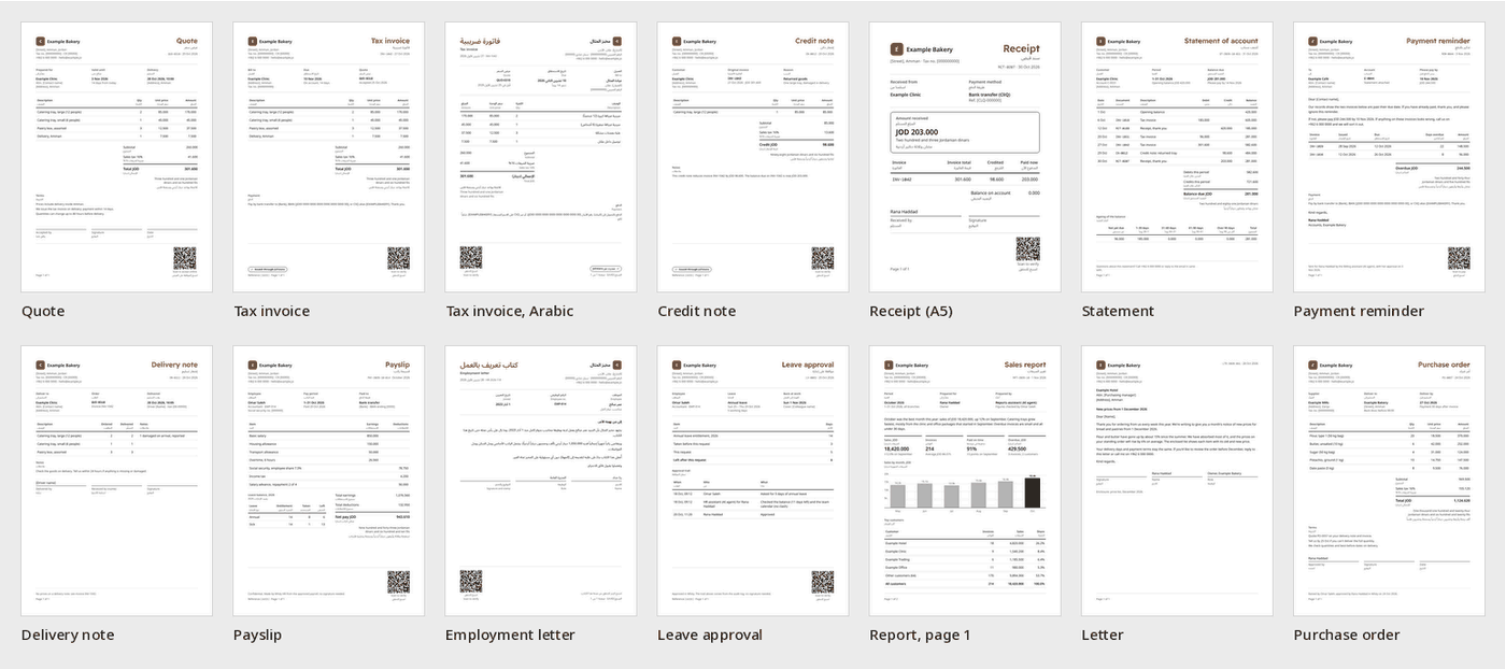

The 13 document templates for Example Bakery

The page

	Rule
Paper	A4 by default; A5 and US Letter follow the same rules. 80 mm thermal receipts come later
Margins	16 mm on every side (178 mm of content on A4)
Letterhead	The tenant's logo, address and tax number at the start side; the title, number and date at the end side
Colour	The tenant colour on the **title only**; everything else is ink, so documents fax and photocopy cleanly. `--doc-accent` is the tenant's print colour, the same in light and dark mode
Languages	Either language leads, per customer: Arabic with small English labels (the layout mirrors) or English with small Arabic labels. Latin values inside Arabic are isolated

Inside

	Rule
Type	Body Noto Sans 9.5 pt, labels 8.5 pt, the title Readex Pro 600 at 22 pt, codes in Geist Mono
Line items	A strong rule under the header, hairlines between rows; no zebra stripes, no grid
Numbers	Tabular figures, end-aligned, JOD to 3 decimals
Totals	An end-aligned block 46% wide; only the grand total is bold, with a 1.5 pt rule above. The amount is written in words under it, in both languages (dinars and fils)
Footer	The JoFotara stamp, reference and "Page x of y" at the start side; the QR code at the end side
Continuation	A small running header (logo, number, "continued"), the table header repeated, "Brought forward" and "Carried forward", totals on the last page only
Charts	Grey bars with the one that matters in ink, values on the bars, no legend
Agents	A document an agent made or sent says so in its footer, with the person it acted for

The set

Group	Documents	Notes
Sales	Quote · Invoice · Credit note · Receipt (A5)	The quote's QR opens it online to accept. The invoice and credit note in this free set carry no JoFotara stamp or fiscal QR
Accounts	Statement of account · Payment reminder · Delivery note	The statement has a running balance and ageing; the delivery note has no prices
People	Payslip · Employment letter · Leave approval	QR to verify; the employment letter keeps a signature and stamp row; the leave approval shows its trail from the audit log
General	Report · Letter · Purchase order	Reports run to several pages with key numbers and an ink-only chart

The free set and Front Office. Whity's free set has an **Invoice** (فاتورة) and a **Credit note** (إشعار دائن), with no JoFotara stamp or fiscal QR. The **Tax invoice** (فاتورة ضريبية) and the **fiscal credit note**, issued through JoFotara with their stamp, reference and QR, are what Front Office adds. The `TplDocInvoice` and `TplDocCreditNote` cards show those, and the JoFotara parts of the footer rule above apply to them (owner, 2 Nov 2026).

The examples tell one story for Example Bakery: quote QUO-0318 → invoice INV-1042 (JOD 301.600) → credit note CN-0012 (JOD 98.600) → receipt RCT-0207 (JOD 203.000) → the clinic's October statement.

Building one


`Doc` lays out pages with a line table, totals and words; `DocPages` gives letters and reports the same letterhead and foot; `DocTable`, `DocKpis`, `DocBars`, `DocNote`, `DocSign` and `DocAmount` are the parts; `Whity.amountInWords(amount, 'en' | 'ar')` writes JOD in words; `DocPreview` shows a document in the app. Every standard label is in `Whity.docLabels` in both languages.

Before shipping

- Have an Arabic-speaking accountant review the Arabic amount in words.
- Confirm the required invoice and credit note fields against the JoFotara specification. Every legal field comes from tenant settings.
- Whity Render should measure row heights when it paginates; the row counts in `Doc` are a safe default.

IN USE


Form printouts: a record that doubles as the approval certificate

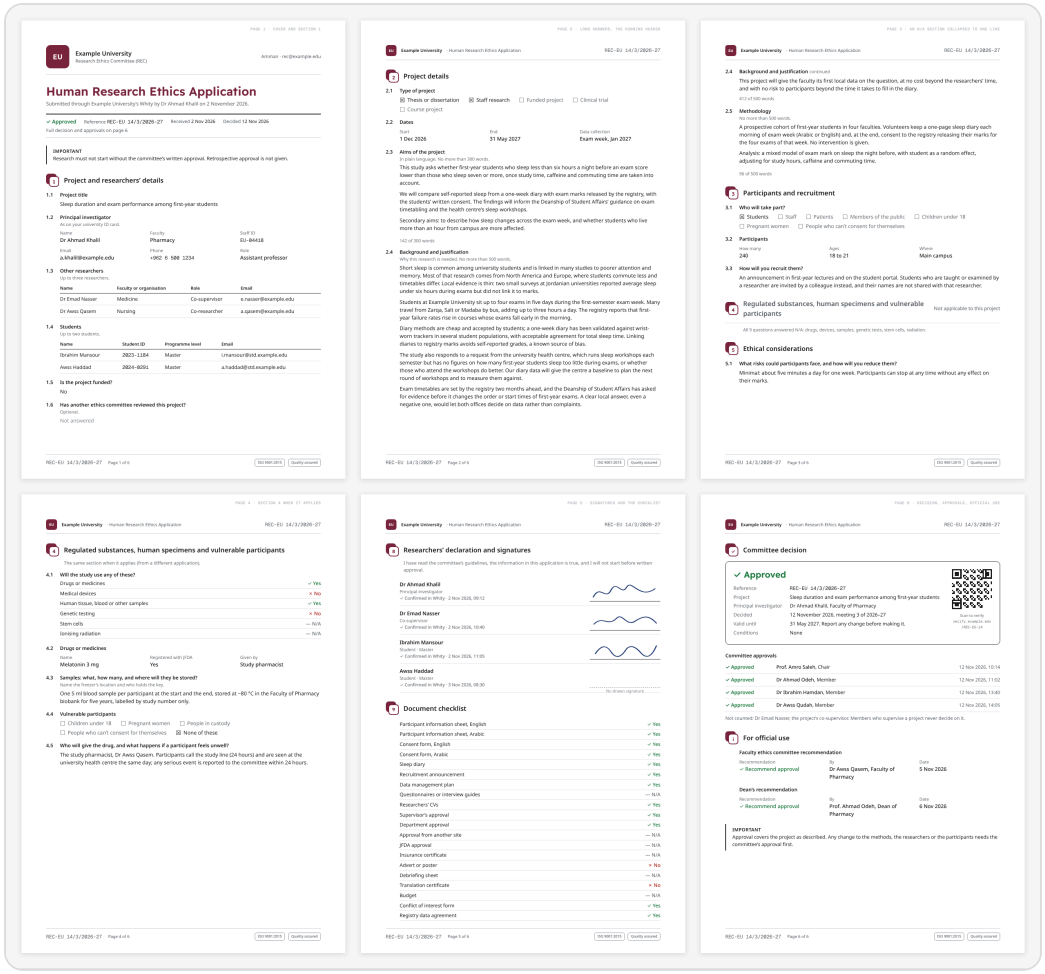

An ethics application: page 1, long answers, an N/A section, signatures, the decision

IN USE


The same page customised three ways (paid plans and trials)

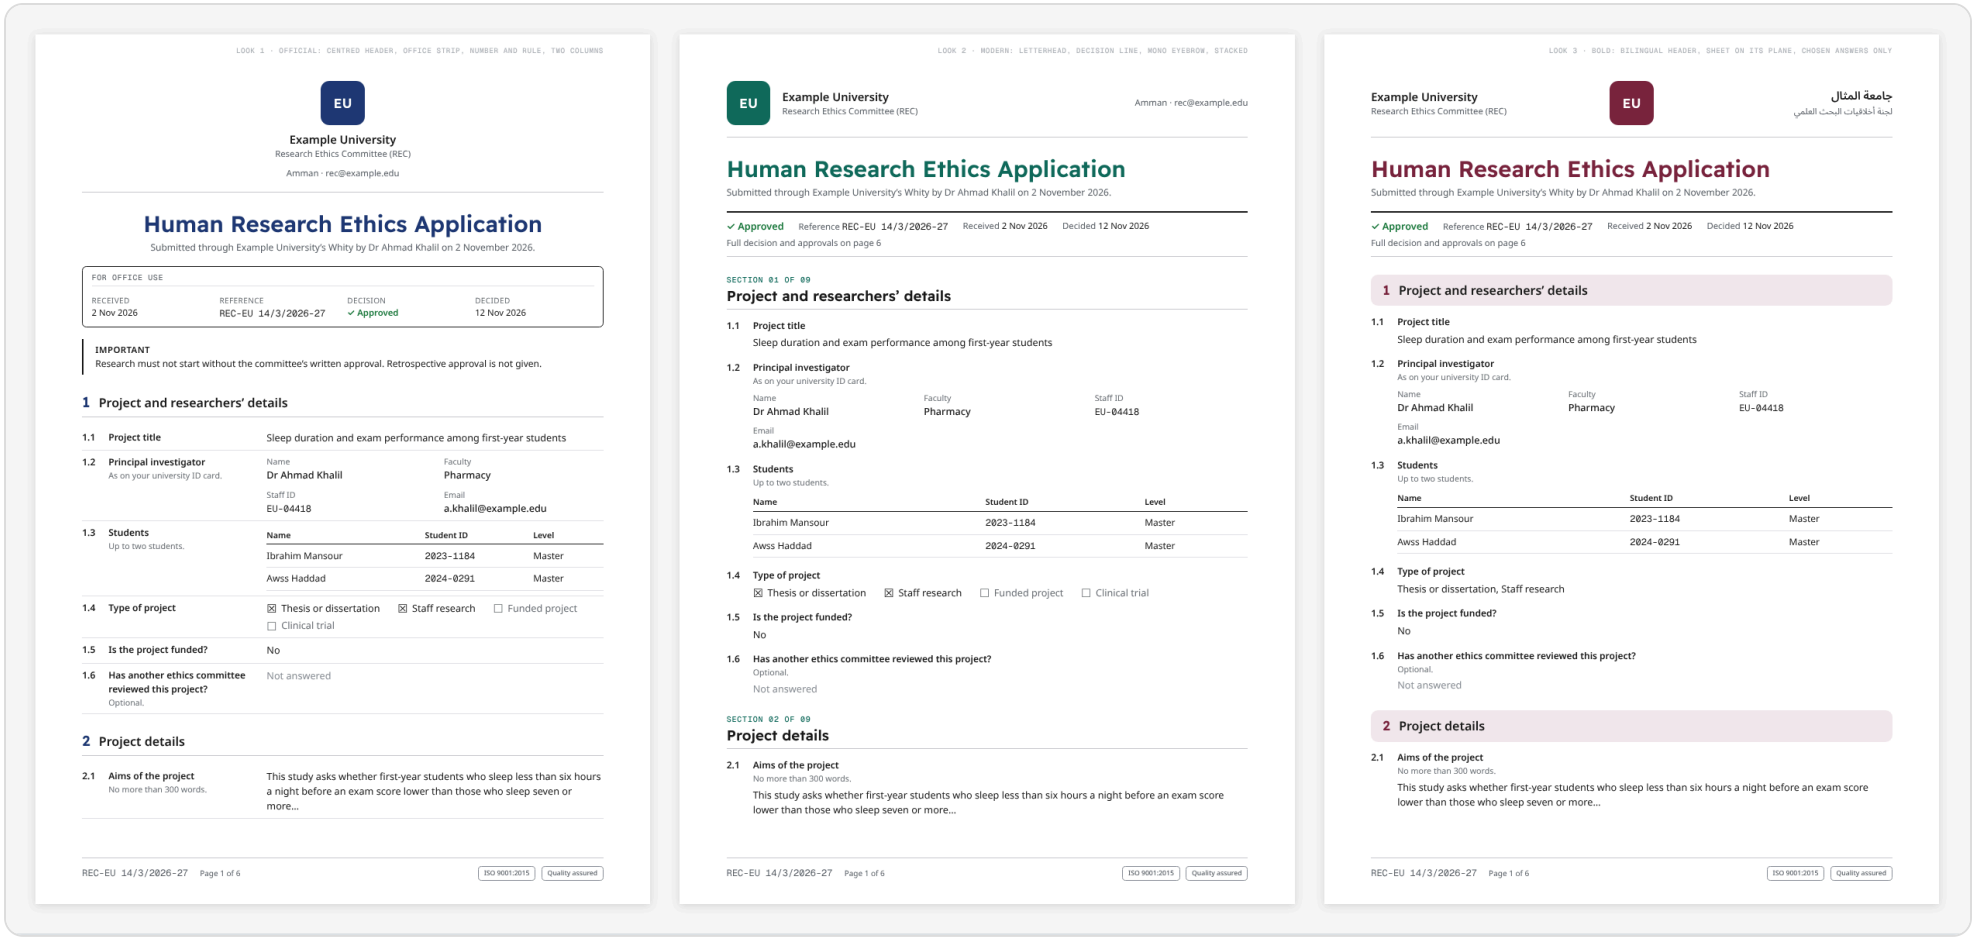

Official, modern, bold

IN USE


Form printout style: every part chosen, with a live preview

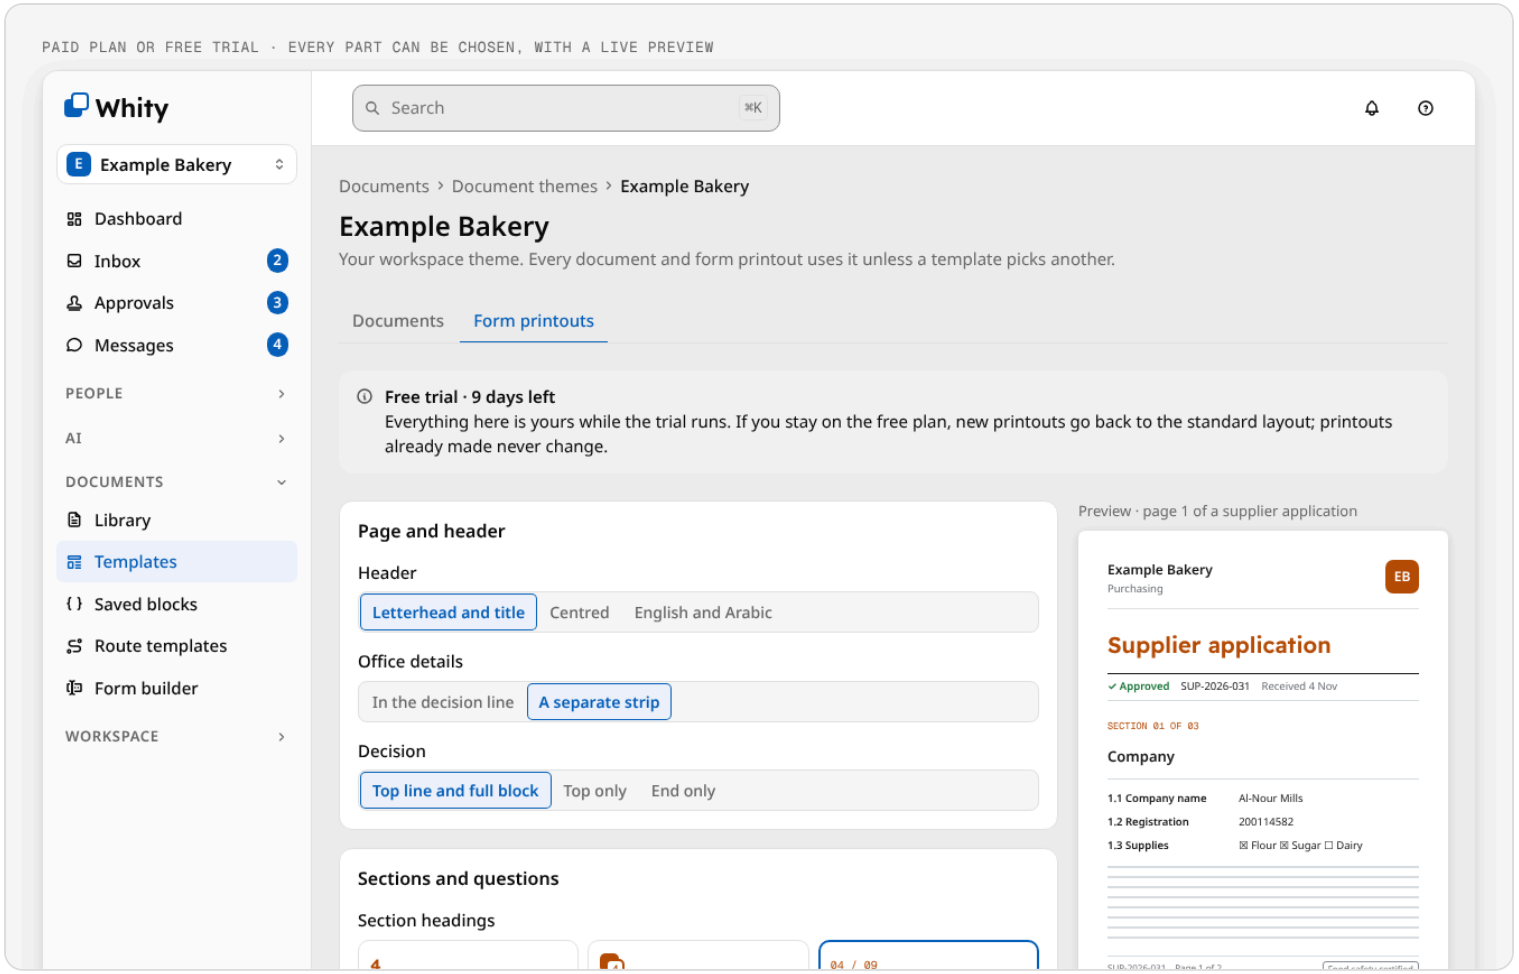

Documents › Document themes › Form printouts

IN USE

Verifying a printed document by its QR code

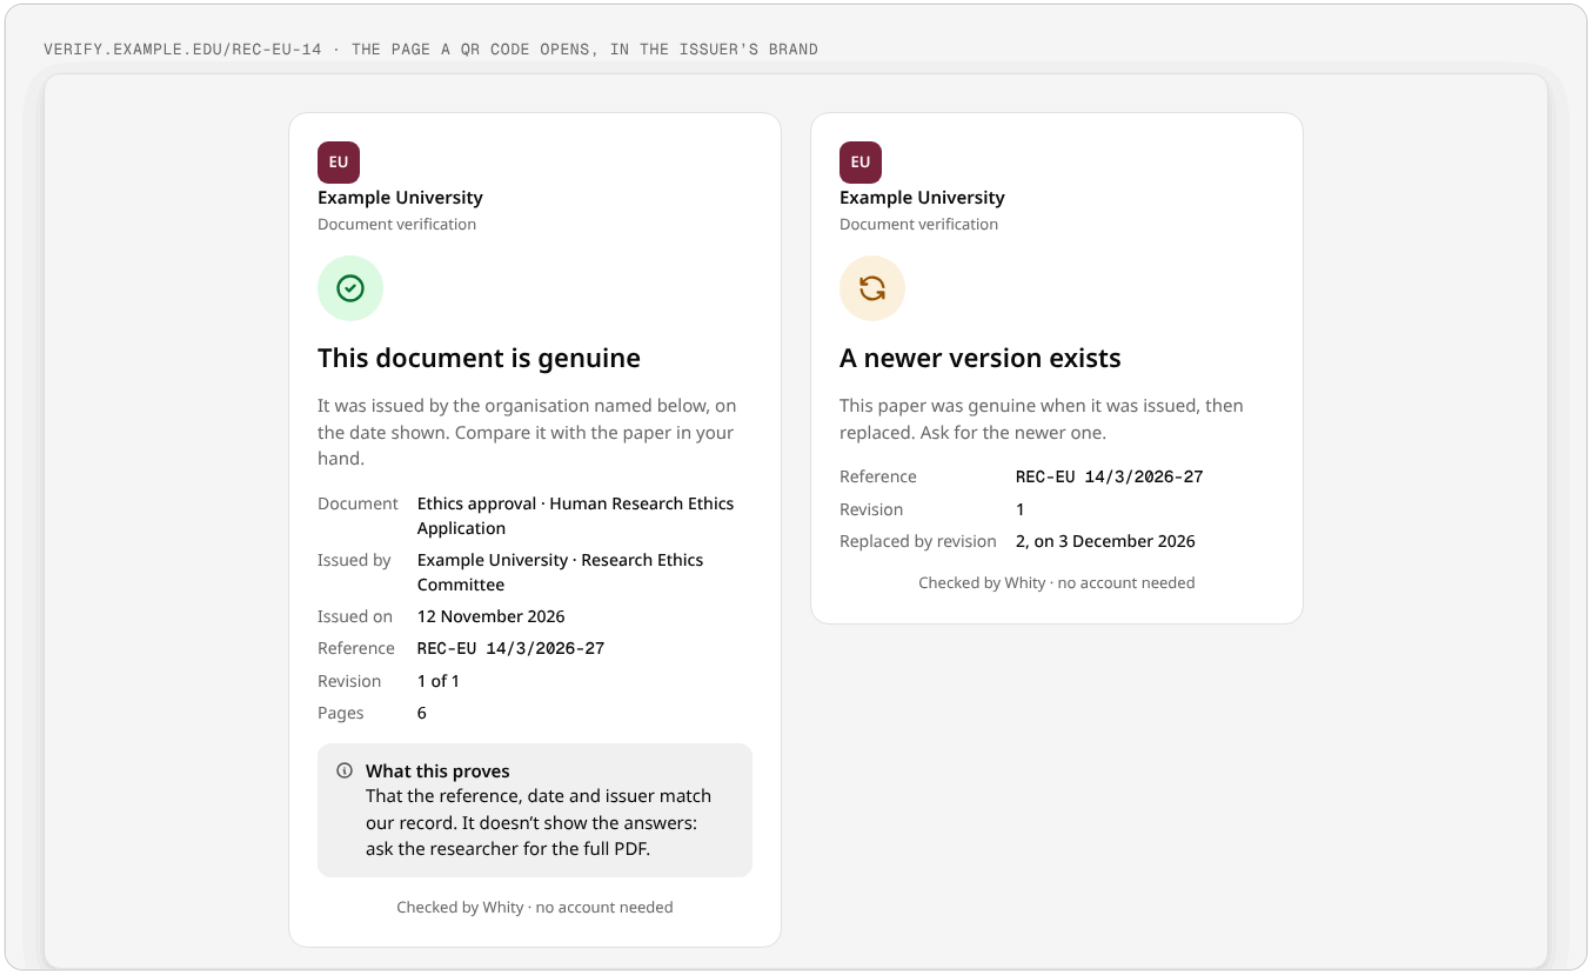

Genuine, replaced, and in Arabic

SECTION 17

Components

The stage 7 inventory: 56 components in 8 groups. The 41 P1 components (what the Front Office demo, approvals and account flows need) were built in 2.0 and the P2 components in 2.1, each with a live card; the two P3 items are still planned. Shared looks for all of them: outline secondary buttons, the main button alone on the plane (7.1); outlined 36px inputs (7.2); selected things on the tint with text in the main colour, tabs underlined (7.3); tinted status badges (7.4).

Group	Component	Priority	Status · card
Foundations	Icon (16 · 20 · 24)	P1	Built · Icon
	Mark · Lockup · Built on Whity	P1	Built · Mark, Lockup, BuiltOnWhity
	Tenant logo slot (image, initials)	P1	Built · TenantLogo
Actions	Button (main, secondary, ghost, destructive, link; 28 · 36 · 40; loading)	P1	Built · Button
	Icon button with tooltip	P1	Built · IconButton, Tooltip
	Split button · button group	P2	Built · SplitButton
	Toggle · toggle group	P2	Built · ToggleGroup
Inputs	Text field · textarea (hint, error, counter, disabled, read-only)	P1	Built · Input, TextFields
	Select · combobox (search, empty, async)	P1	Built · Select, Combobox
	Checkbox · radio · switch (indeterminate)	P1	Built · Switch, Choices
	Date · date range (Arabic months, Western digits)	P1	Built · DatePicker
	Money input (JOD, 3 decimals)	P1	Built · MoneyInput
	One-time code (6 digits, paste)	P1	Built · OtpInput
	Search field (⌘K hint)	P1	Built · SearchField
	Phone input (+962 default)	P2	Built · PhoneInput
	File upload (drag, progress, error)	P2	Built · FileUpload
	Tag input	P3	Planned
Navigation	App shell · sidebar (rail 56, drawer under 768)	P1	Built · TplAdminDashboard, AppShellCollapsed, AppShellMobile
	Top bar (search, notifications, user)	P1	Built · in AppShell
	Tenant switcher	P1	Built · TenantSwitcher
	Tabs (counts)	P1	Built · Tabs
	Pagination	P1	Built · Pagination (on the Breadcrumb card)

Group	Component	Priority	Status · card
	Breadcrumb	P2	Built · Breadcrumb
	Segmented control	P2	Built · Preferences
	Command palette (⌘K, ask an agent)	P2	Built · CommandPalette
	Stepper	P2	Built · Stepper
Data display	Data table (sort, select, bulk bar, sticky header, states, totals)	P1	Built · DataTable, DataTableSelect, DataTableStates
	Card · stat card	P1	Built · Card
	Badge · status	P1	Built · Badge
	Avatar (initials, agent, system)	P1	Built · Avatar
	Money · date	P1	Built · Money, `formatDate`
	Description list	P1	Built · DescriptionList
	Timeline (people and agents)	P1	Built · Timeline
	Tooltip	P1	Built · Tooltip
	Chart (bar, line, donut, 2.7 palette)	P2	Built · BarChart, LineChart, DonutChart (print: DocBars)
Feedback and layers	Alert (four statuses, action)	P1	Built · Alert
	Toast with Undo	P1	Built · Toast
	Dialog · confirm with typed name	P1	Built · Dialog, ConfirmDialog
	Drawer (record side panel)	P1	Built · Drawer
	Popover · menu (keyboard)	P1	Built · Menu
	Skeleton · progress	P1	Built · Skeleton
	Empty state	P1	Built · EmptyState
	Error and system states (404, 403, 500, offline)	P1	Built · TplSystemStates
Agents	Actor chip (person, agent for person, system)	P1	Built · ActorChip

Group	Component	Priority	Status · card
	Action proposal (waiting, approved, declined, expired, undone)	P1	Built · ActionProposal
	Agent activity (filter by agent)	P1	Built · AgentActivity
	Scope grant (off, ask first, allowed)	P1	Built · ScopeGrant
	Approvals inbox (one at a time)	P1	Built · ApprovalQueue, TplAgentApprovals
	Undo bar (the tool's window)	P1	Built · UndoBar
	Agent run status	P2	Built · AgentRunStatus
Platform	Language · theme switch	P1	Built · Preferences
	Document preview (zoom, print, download, send)	P1	Built · DocPreview
	Plugin card	P2	Built · PluginCard
	Branding preview	P2	Built · TplAdminBranding
	Plan gate · upgrade	P2	Built · PlanGate
	Signature · stamp	P3	Partly: DocSign on documents

Document editor

The editor's parts (shell, page view, blocks, block chrome, plugin and saved blocks, inline tools, inserting, comments and suggestions, agents, typography, Arabic) are design definitions in their own card group, with the contract in `handoff/editor/`. The Whity team builds the working editor (section 18); the components above (Menu, Popover, Tooltip, ToggleGroup, Avatar, ActorChip, AgentRunStatus, Dialog) are its parts.

Charts


Bars at most 24px thick with a 4px rounded end, square on the baseline; lines 2px with an 8px end dot ringed in the card colour; a hairline grid; one axis only. One value is labelled (the highest bar, the line's last point), every mark has a tooltip on hover and keyboard focus, a legend appears for two or more series, and every chart can switch to a table. Colours follow 2.7 in fixed order, series 1 the tenant's colour, never cycled; text is never in a series colour. Time runs left to right in both languages (decision 2.1b). Donuts fold past six slices into "Other".

Using them


`components/bundle.js` assigns `window.Whity` (React 18); `bundle.css` styles everything; `index.d.ts` types every prop. Every visible string has an English default and takes `labels` for Arabic. Components use logical properties, so `dir="rtl"` mirrors them. In whity-core these map onto `packages/ui` (shadcn); see the component map in section 12.

IN USE

The shell: sidebar, rail and drawer

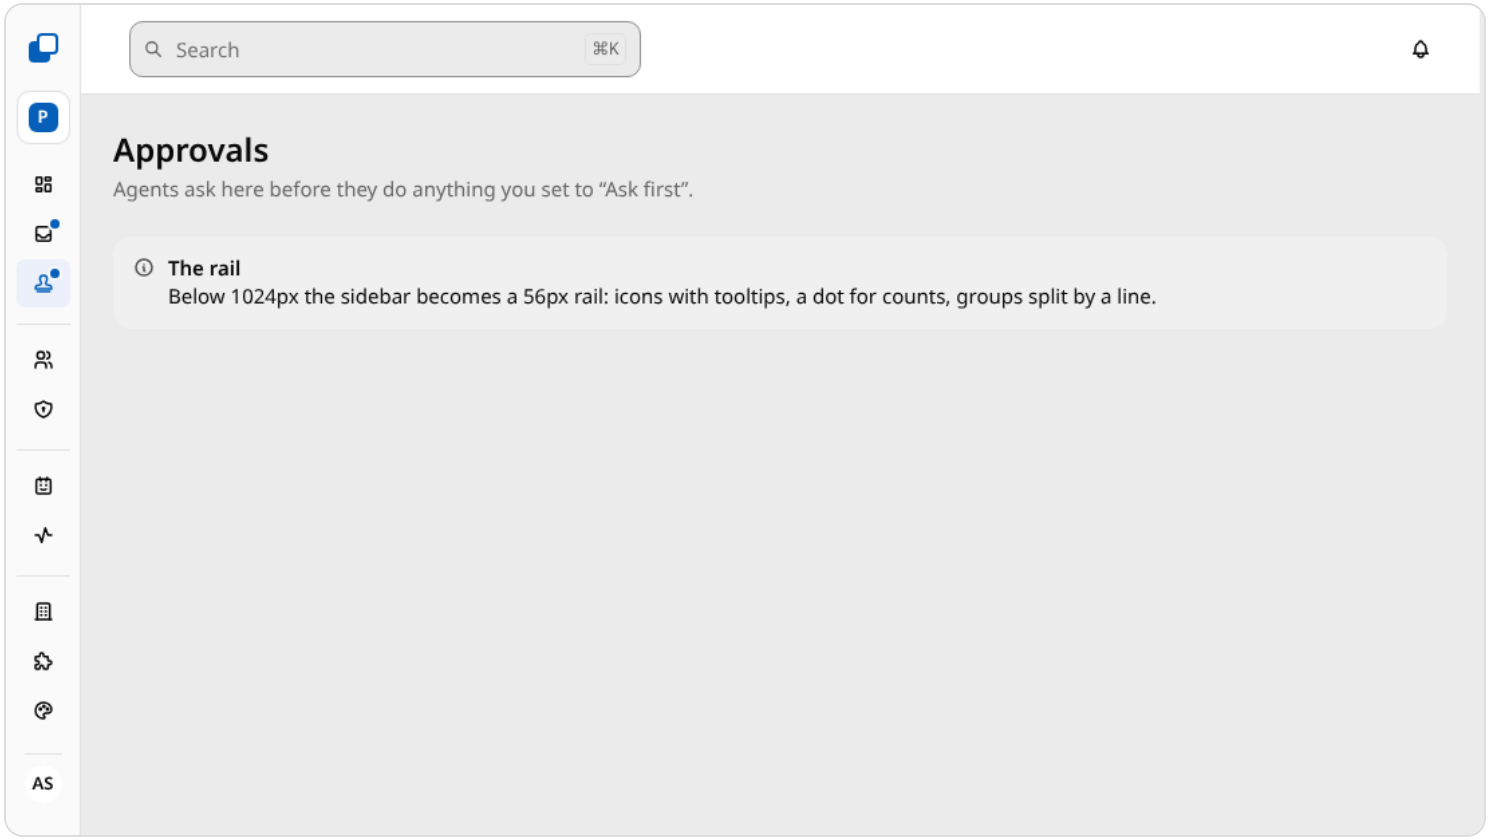


Rail, 768–1023px

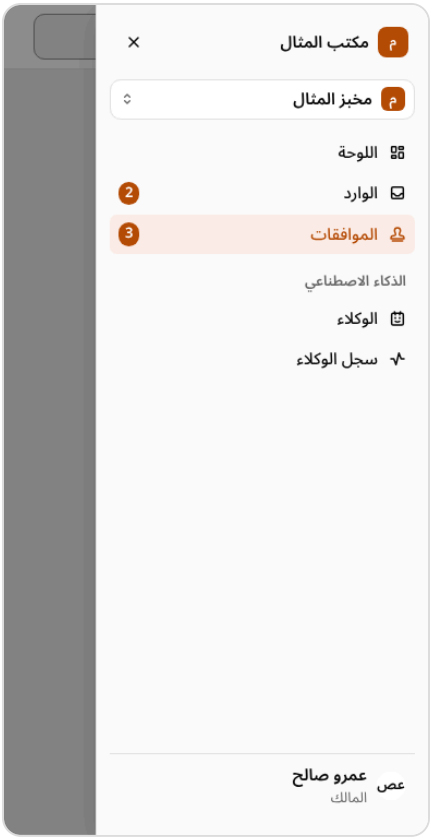


Drawer, under 768px

IN USE


Data, dates and layers

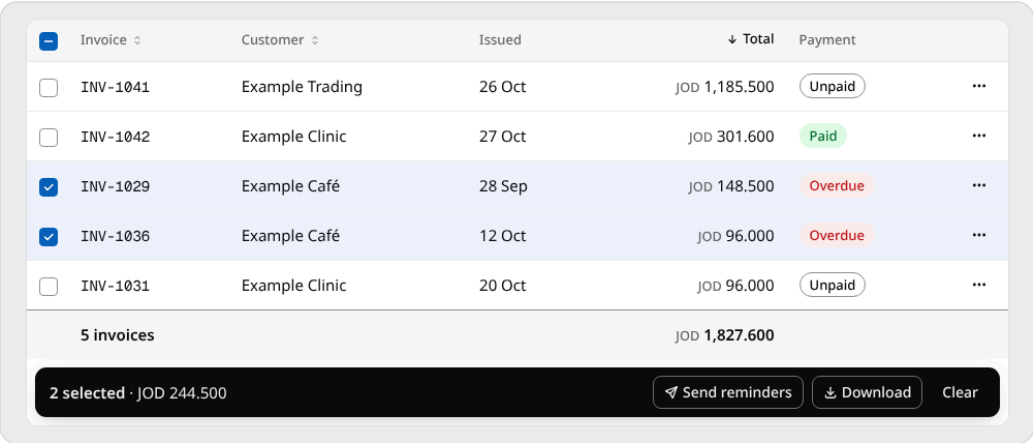


Data table with bulk bar

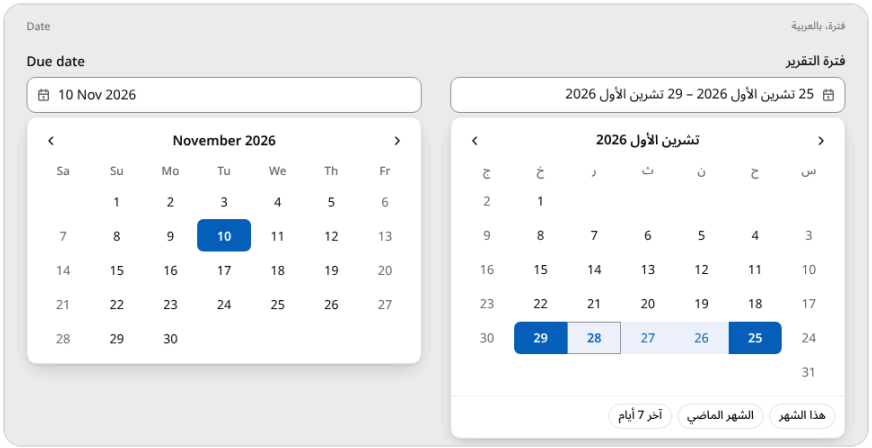

Date range

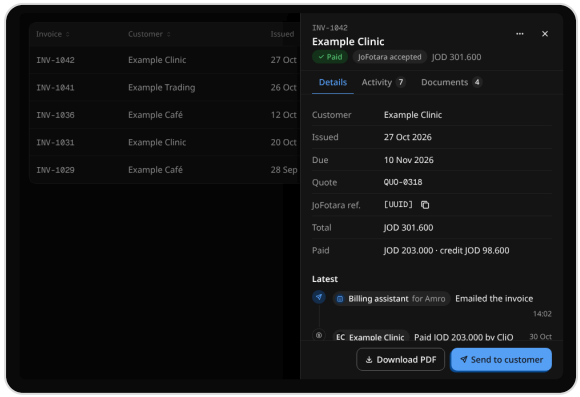


Record drawer (dark)

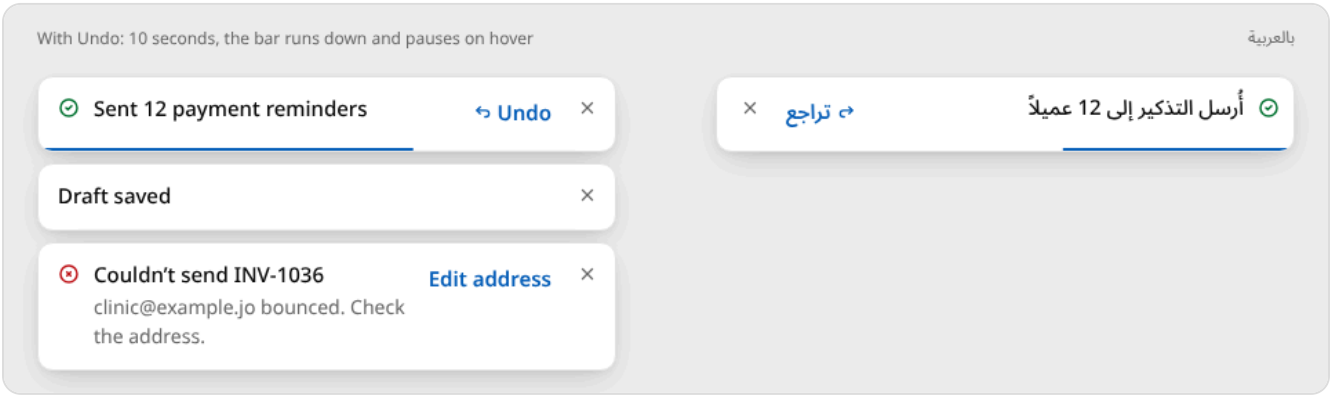


Toast with Undo

IN USE

Sign-in and system states

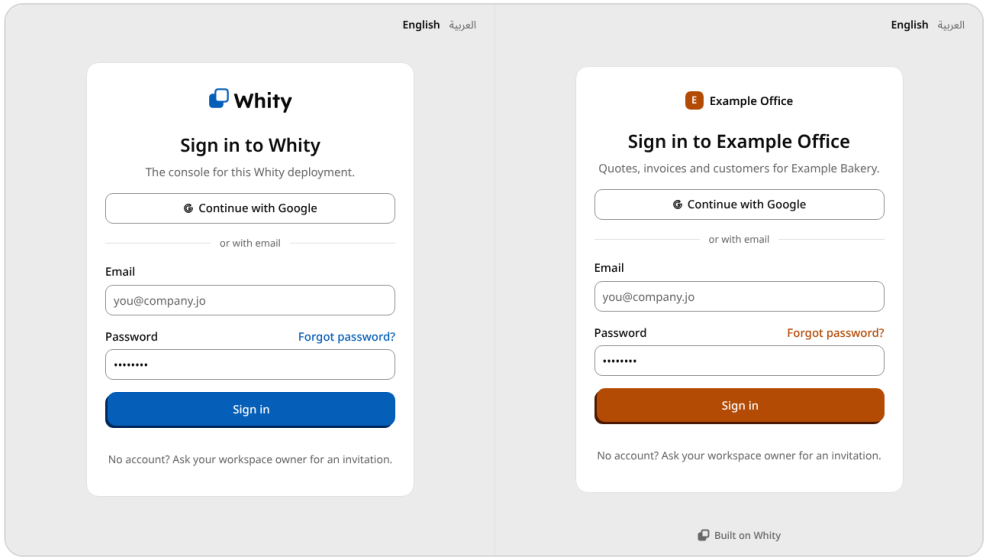


Sign in

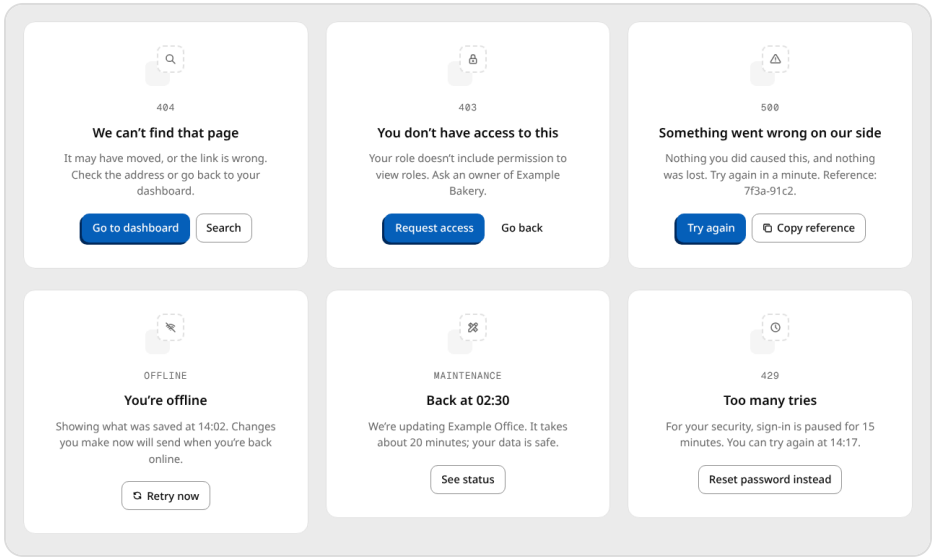


System states

IN USE

Charts

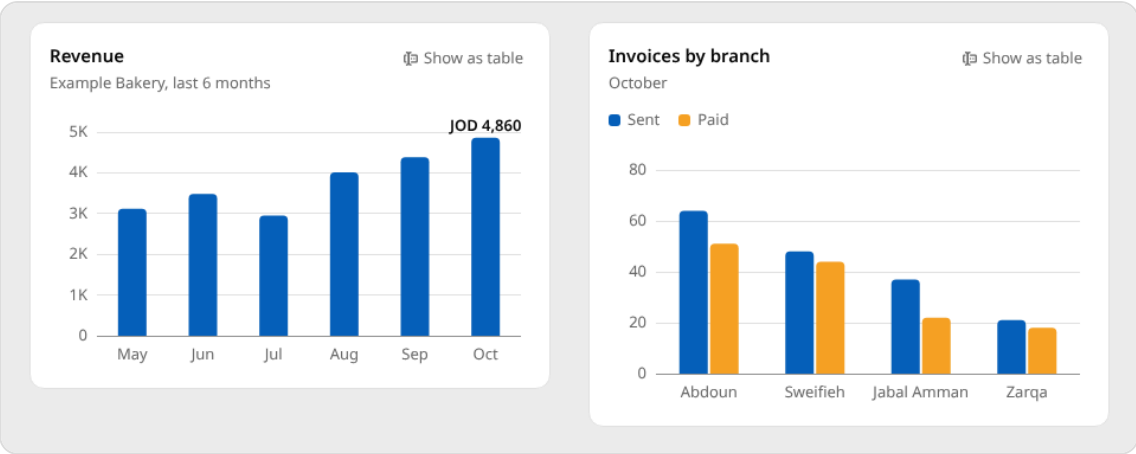


Bar charts: one series and grouped

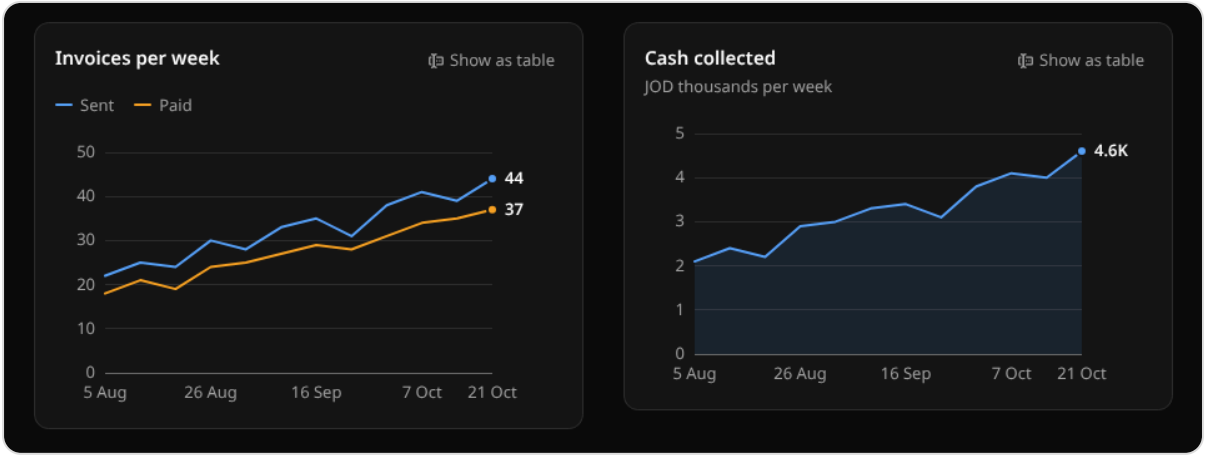


Line charts with the crosshair (dark)

IN USE

Command palette and agent runs

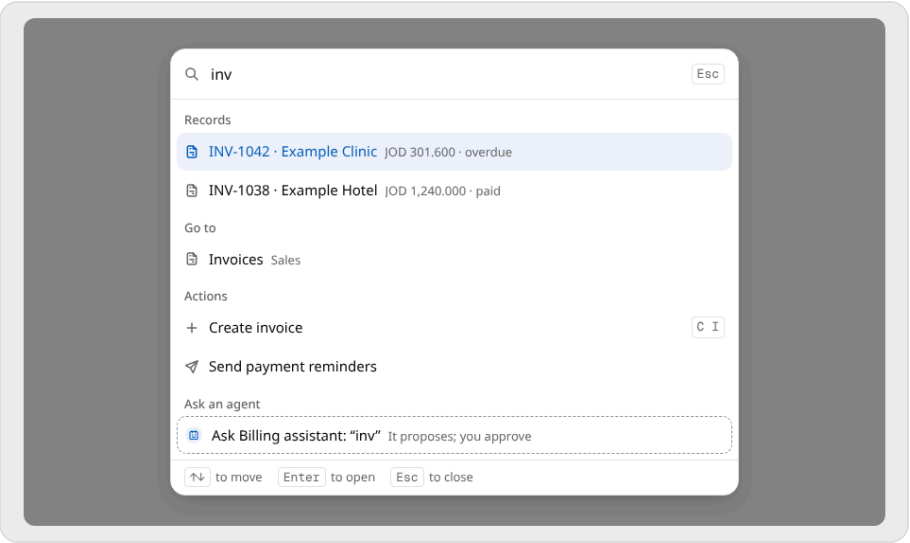


Command palette (⌘K) with the agent row

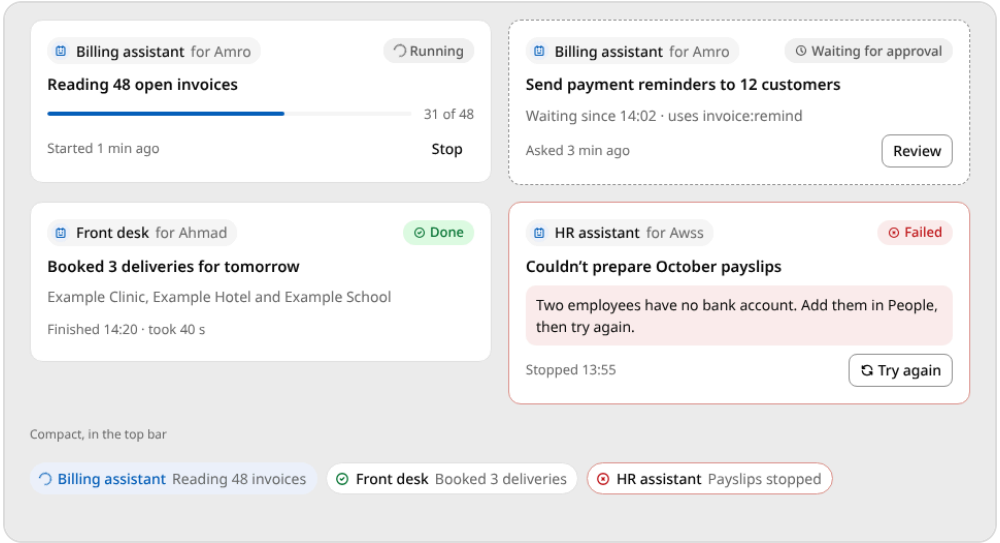


Agent run status: running, waiting, done, failed

IN USE


Steps, uploads and plan gates

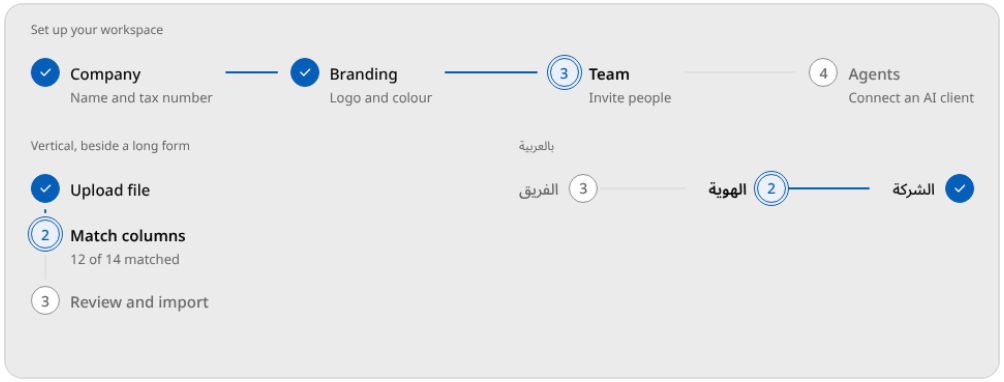

Stepper

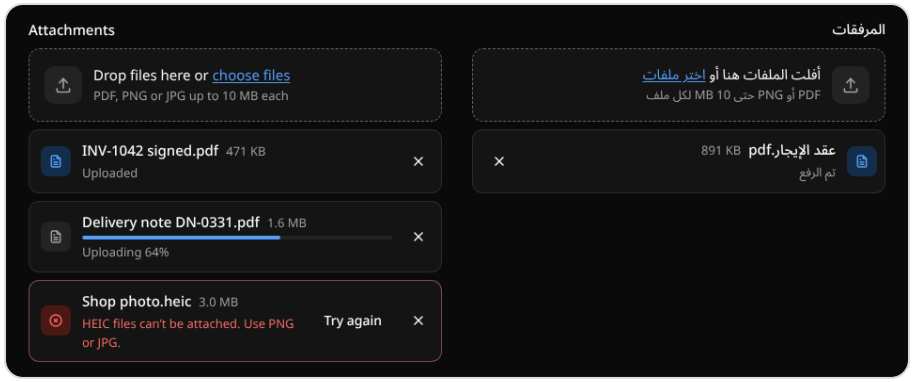

File upload (dark)

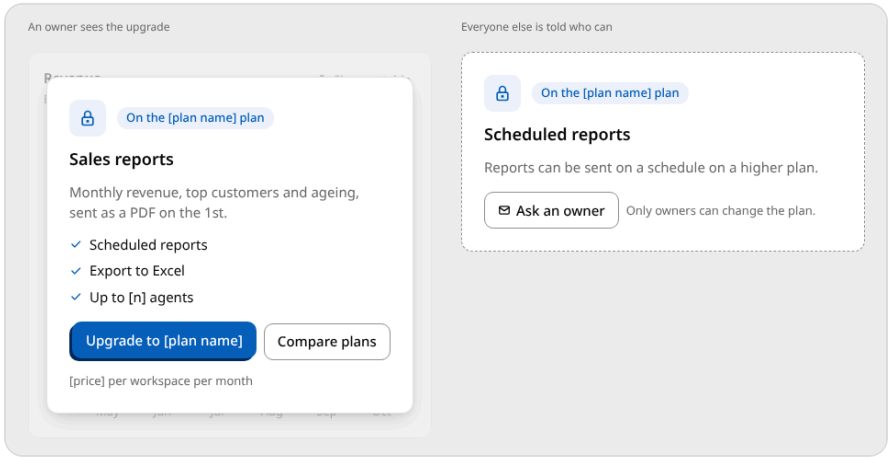

Plan gate: owner and member

SECTION 18

Document editor

One editor for everything people write in Whity: templates Whity Render prints, letters, reports, notes and wiki pages. It takes blocks and speed from Notion and Gutenberg, and pages, comments and suggestions from Google Docs. Agents write in it as suggestions only. The design system defines it (decisions E.1–E.43, the Document editor cards, `handoff/editor/`); the Whity team builds it (E.1).


The shell

Part	What it holds
Header (56px)	Back, the document's icon, title, path and save state; the mode (Editing, Suggesting, Viewing); comments; PDF; **Publish** for templates, the one action on the plane (E.9)
Toolbar (44px)	Google Docs order: undo, redo · style · bold, italic, underline, strikethrough · link, highlight · lists · Insert · Field · comment · Ask an agent · view, zoom, outline (E.5)
Body	The outline (220px), the canvas on the grey ground, the margin rail (300px) with comment and suggestion cards beside their text (E.6)
Status bar (28px)	Words, language, type, pages, who edited last

Under 1280px the outline closes; under 1024px the rail becomes a drawer; under 768px the toolbar scrolls and the bubble and / menu carry the rest.

Two views

- **Continuous** (notes, wiki): one sheet on the grey ground, 760px with 616px of text, following the theme; a per-document Full width switch for wide tables (E.34).
- **Page view** (templates, anything that prints): A4 pages at 16mm margins with the letterhead, running header and "Page x of y", white in both themes like paper (E.7, E.11). **Preview with a record** fills the fields with a record's values and hides comments and suggestions (the rail says so); it's read-only until Show fields (E.12).

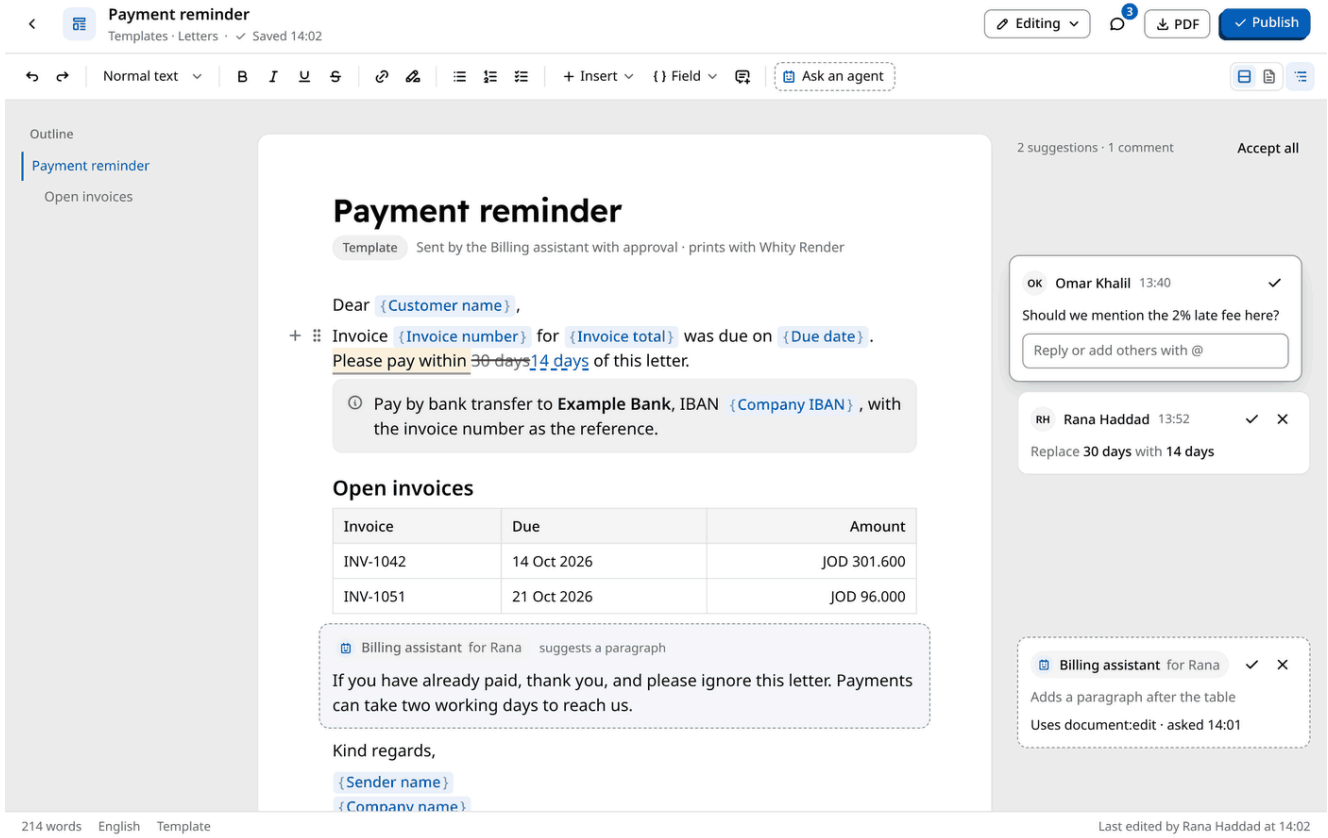

The editor shell: header, toolbar, outline, continuous sheet, margin rail

Blocks

Text, Heading 1–3, Quote, Code · Bulleted, Numbered, Checklist · Callout (Note, Important) · Toggle, Columns, Divider, Page break · Table, Image, File · Record and Chart (live), Signature and stamp (E.13–E.16) · Barcode, QR code, Maths (E.40–E.42). Tables are document tables; data comes in as live Record and Chart blocks, frozen in each PDF at render time.

Block chrome: hovering a block shows + and a drag handle in the margin; the handle drags or opens the block menu (Turn into, Comment, Duplicate, Move, Delete). Selecting a table, image, callout or embed shows its own toolbar above it (E.8).

Plugin blocks: plugins add blocks through the block registry. Verified and first-party plugins render natively with the Whity SDK; others in a sandboxed frame. A block needs a print view to be used in templates. A disabled plugin leaves a placeholder that keeps the data and blocks publishing. Each plugin gets its own group in the / menu (E.17–E.20).

Saved blocks: select several blocks and Save as block, Synced (edit once, every document updates) or Copy, for Only me or the workspace; synced blocks can leave parts to fill per document (E.21–E.24). A published template picks up a synced block's change at its next publish (E.38).

Label sheets: a document kind of its own, a sheet of identical labels in a fixed grid, each holding the same blocks and fields. Print fills one label per record or per row of an uploaded CSV. It opens in the page view only; a certificate is a one-label sheet (E.43).

Writing

- **The / menu and +:** every block, grouped (Whity's, Saved blocks, one group per plugin, Ask an agent last), filtered as you type. Markdown shortcuts are on; ⌘Z right after reverts one (E.28).
- **Links:** ⌘K with text selected adds a link; with nothing selected it opens the command palette (E.36).
- **The bubble:** bold, italic, underline, strikethrough, code, link, highlight (one colour, E.25), comment, Rewrite.
- **Merge fields:** `{{` or Field ▾; a chip with the field's plain name on the tint (E.26). Preview shows values; a missing value is flagged, and Whity Render won't issue a document with a required field missing (E.27).

Comments, suggestions and agents

- **Modes:** Editing, Suggesting (every edit is a suggestion), Viewing. People who can't edit are in Suggesting (E.10). Suggested text is dashed: insertions in the main colour, deletions struck through. Comments mark their text with the warning tint, on screen only (E.39).
- **Deciding:** anyone who can edit accepts or rejects any suggestion, an agent's included, and the decision is logged (E.29). Publishing a template is checked first: open suggestions, a block whose plugin is off, a block without a print view or an unknown field each block it (E.37).
- **Agents:** asked from the / menu, the toolbar, Rewrite, or an @mention in a comment, where they reply in the thread (E.30). They read the document and the records it references, within their and the person's permissions (E.31). Everything they write arrives as a dashed, attributed suggestion (E.4). They act unprompted only on a routine an owner sets up (E.32).

Type

	On screen	On paper
Title	Readex Pro 600, 31px	Readex Pro 600, 22pt, the tenant's colour
Headings	Noto Sans 600, 24 · 20 · 18px	Noto Sans 600, 14 · 12 · 10.5pt
Body	Noto Sans 16px, line height 1.5 (Arabic 1.7)	9.5pt (stage 6)


Arabic titles use Readex Pro's Arabic design (E.35). In Arabic the shell mirrors, each block follows its own text direction, and numbers, codes and amounts stay Western and left to right (section 8).

For engineering

`handoff/editor/whity-document.ts` is the contract: the document model, marks, blocks, comments and suggestions, the block registry and plugin manifest, saved blocks, the editor's props and the publish checks. `handoff/editor/README.md` maps each part onto TipTap and ProseMirror. Live collaboration (cursors, presence, version history) comes after the first version (E.3).

IN USE


The editor shell

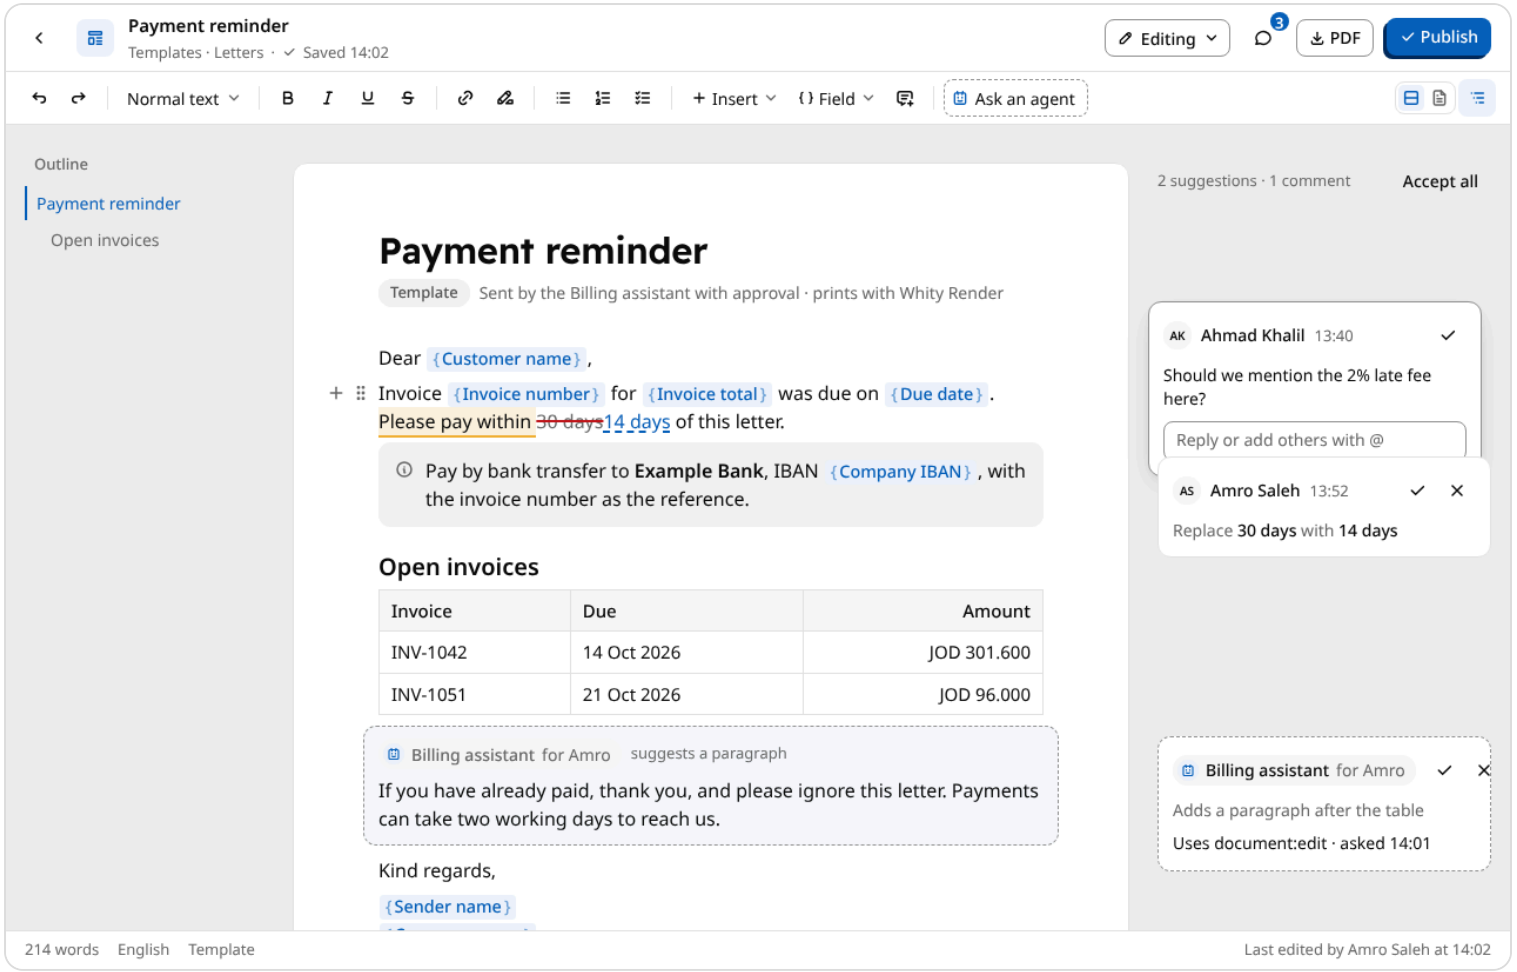

Header, toolbar, outline, continuous sheet, margin rail, status bar

IN USE


Page view, previewing with a record (dark)

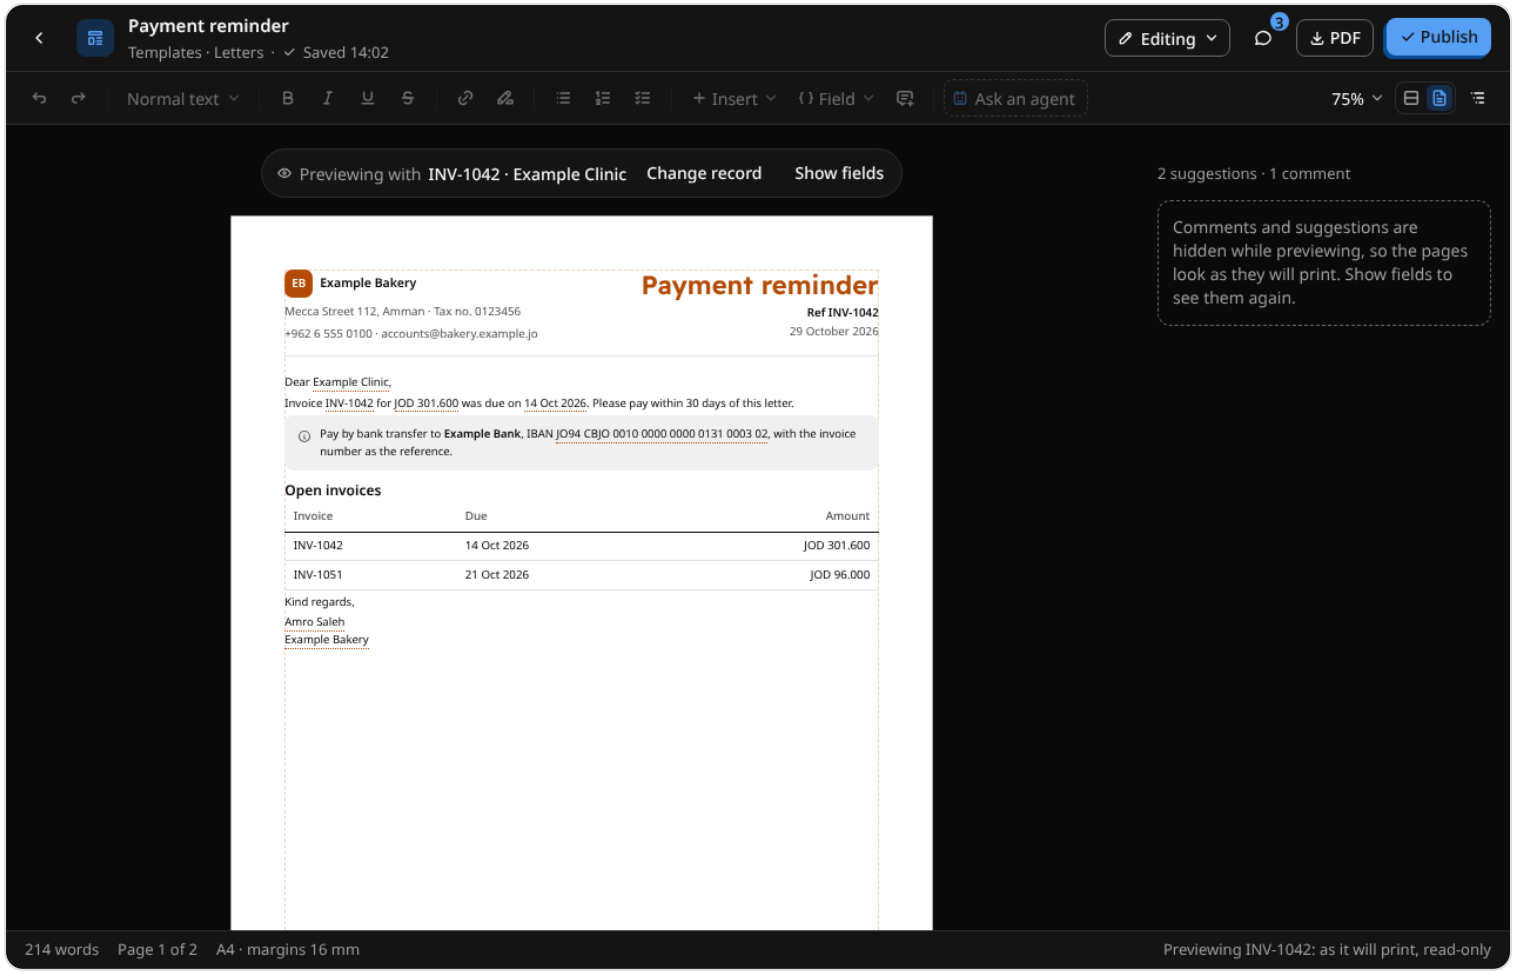

A4 page view with letterhead, previewing INV-1042

IN USE


Blocks

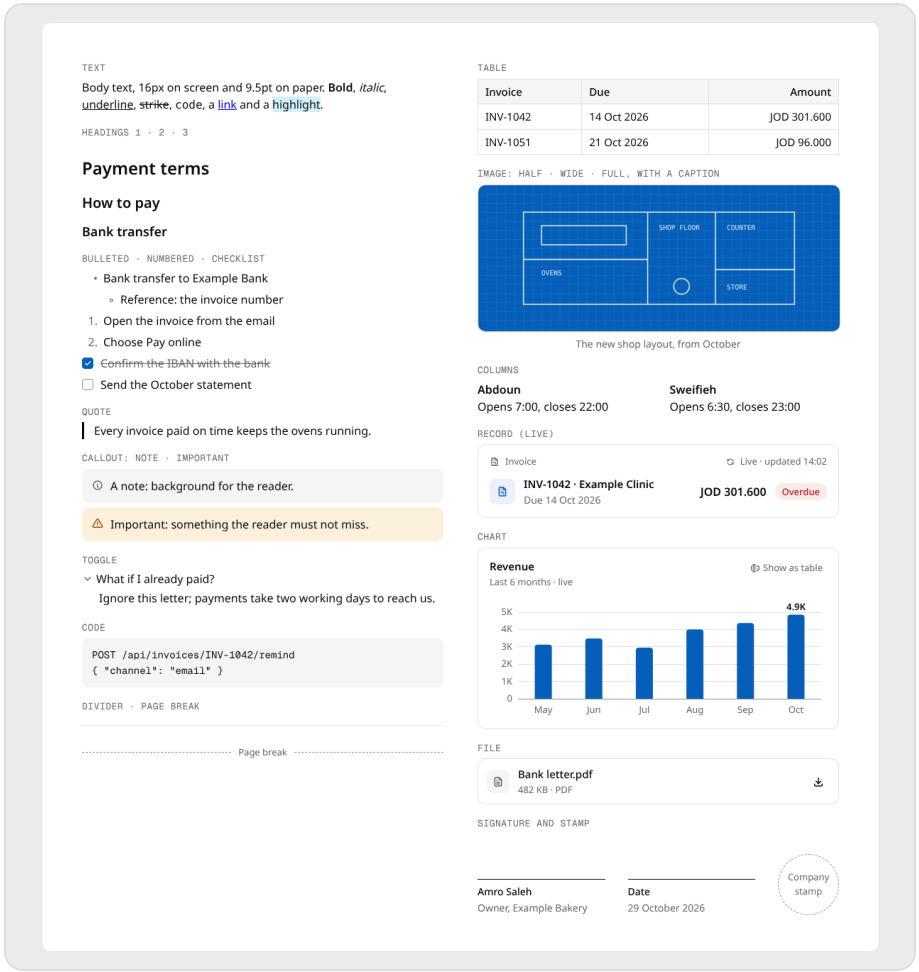

The block catalogue

IN USE


Block chrome

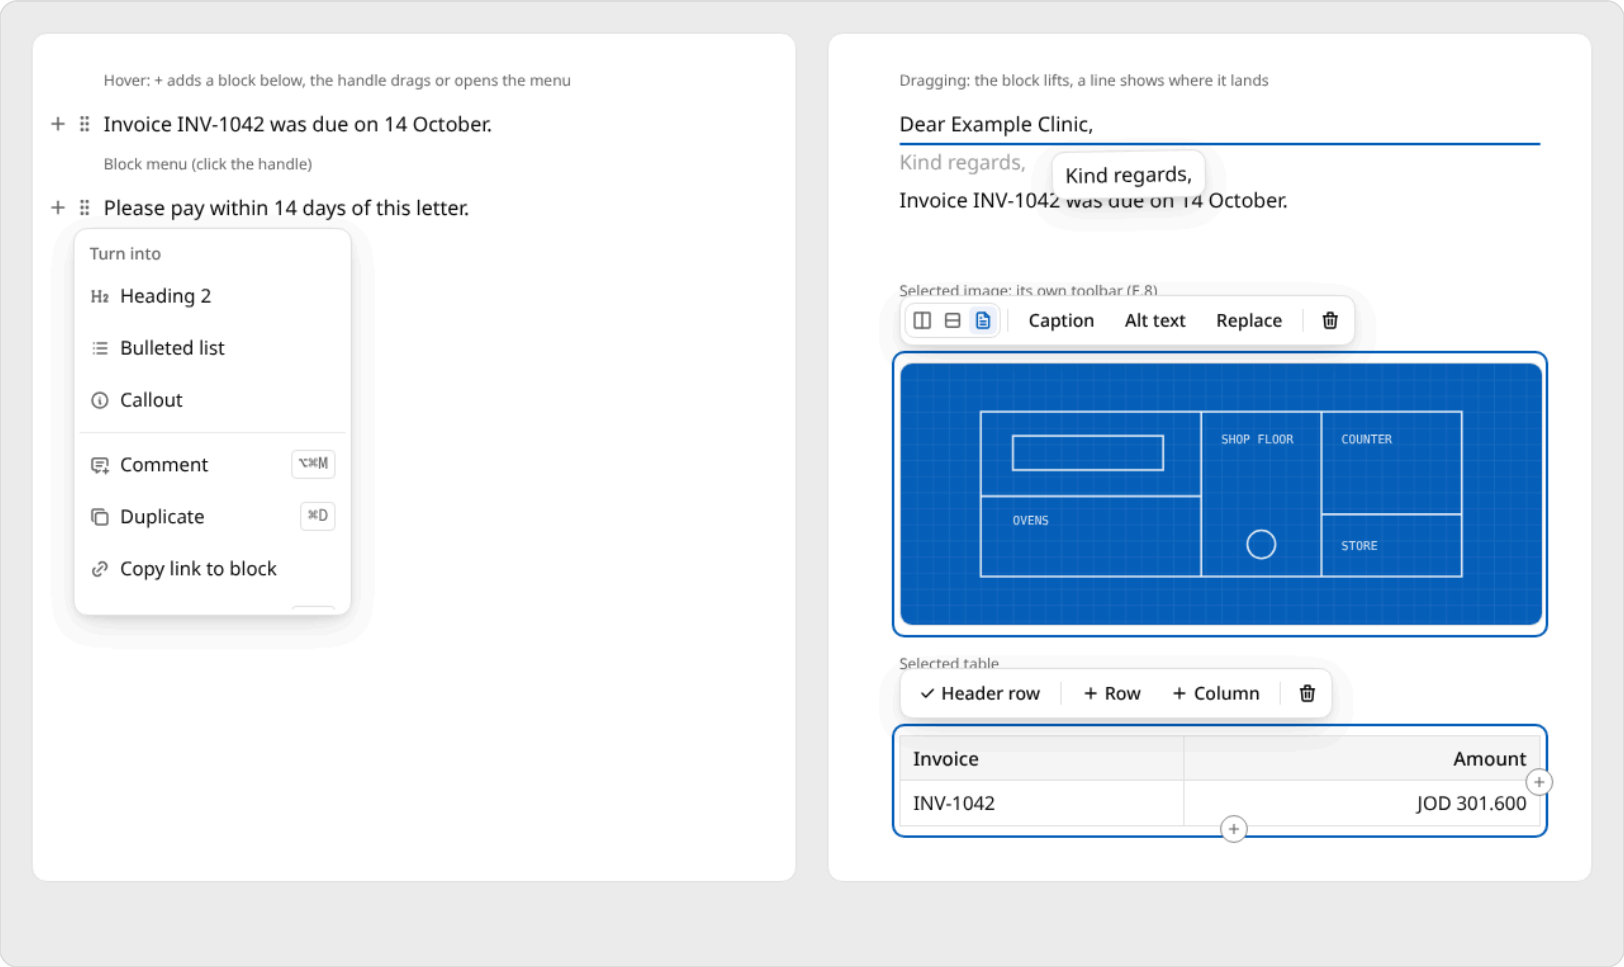

Gutter, block menu, dragging, selected blocks

IN USE


Plugin and saved blocks

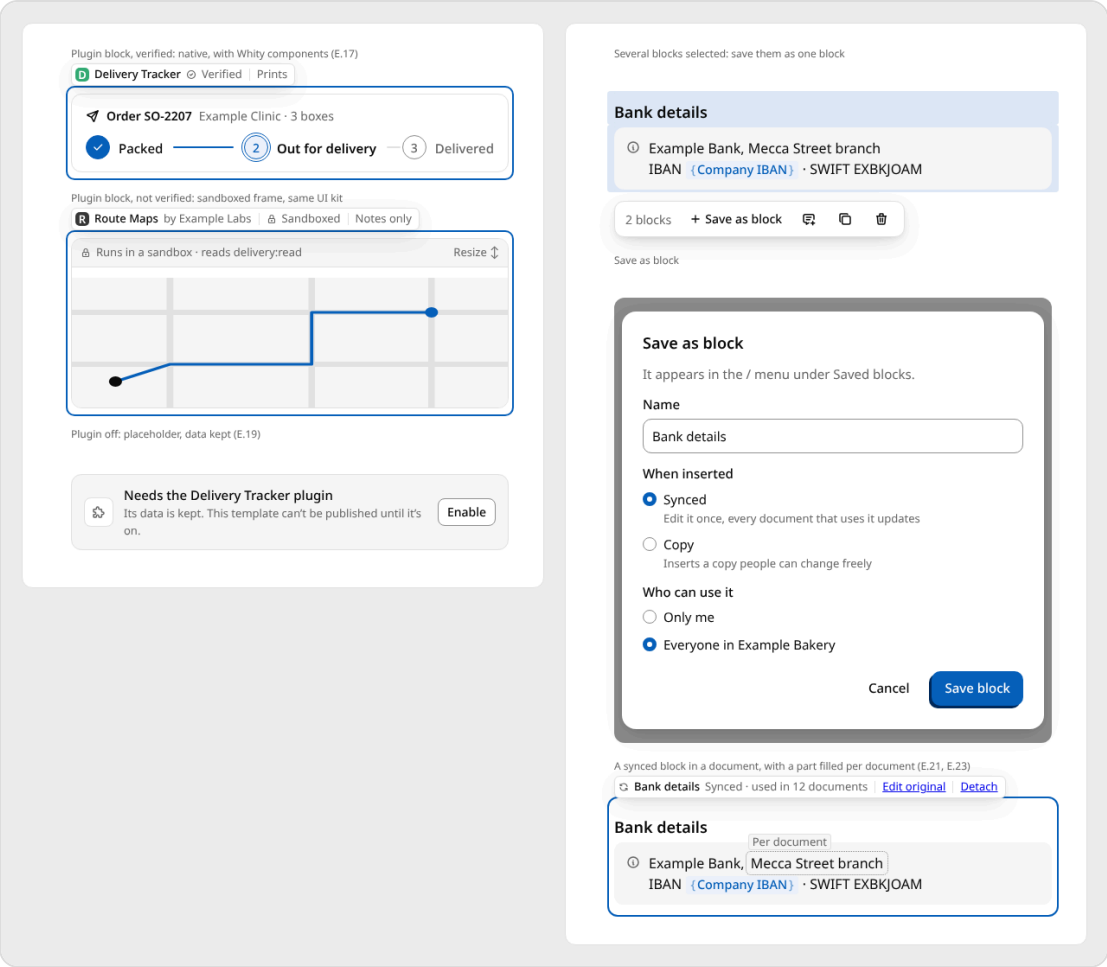

Plugin blocks (native, sandboxed, plugin off) and saved blocks

IN USE


Inline tools

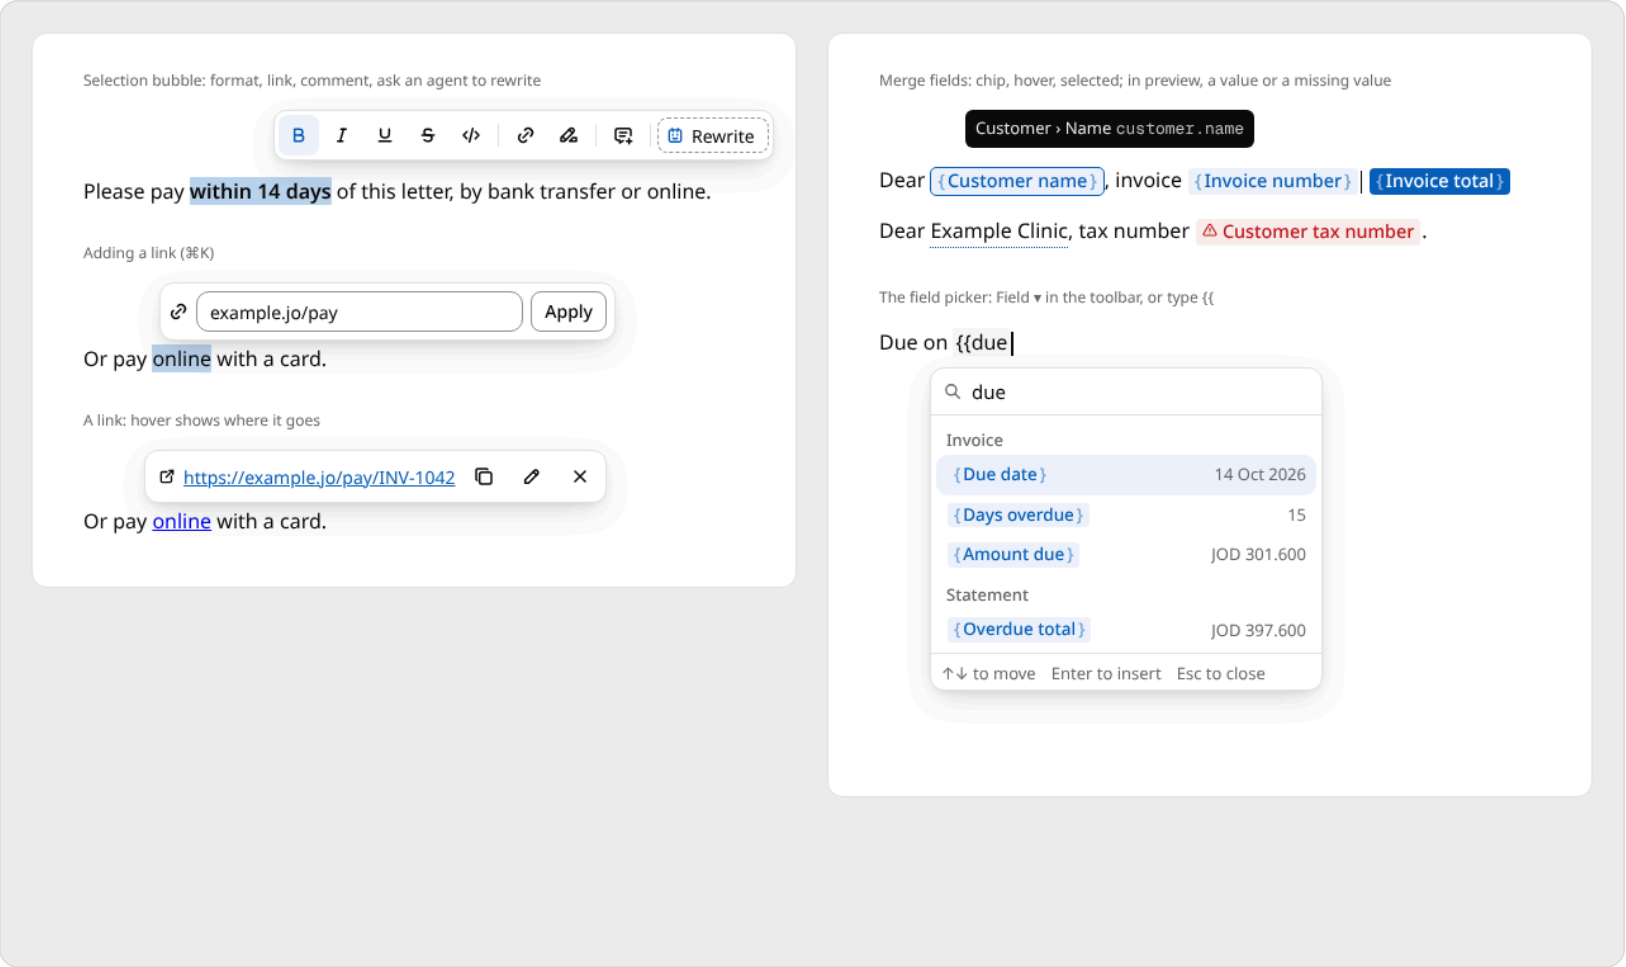

Selection bubble, links, merge fields, field picker

IN USE


Inserting

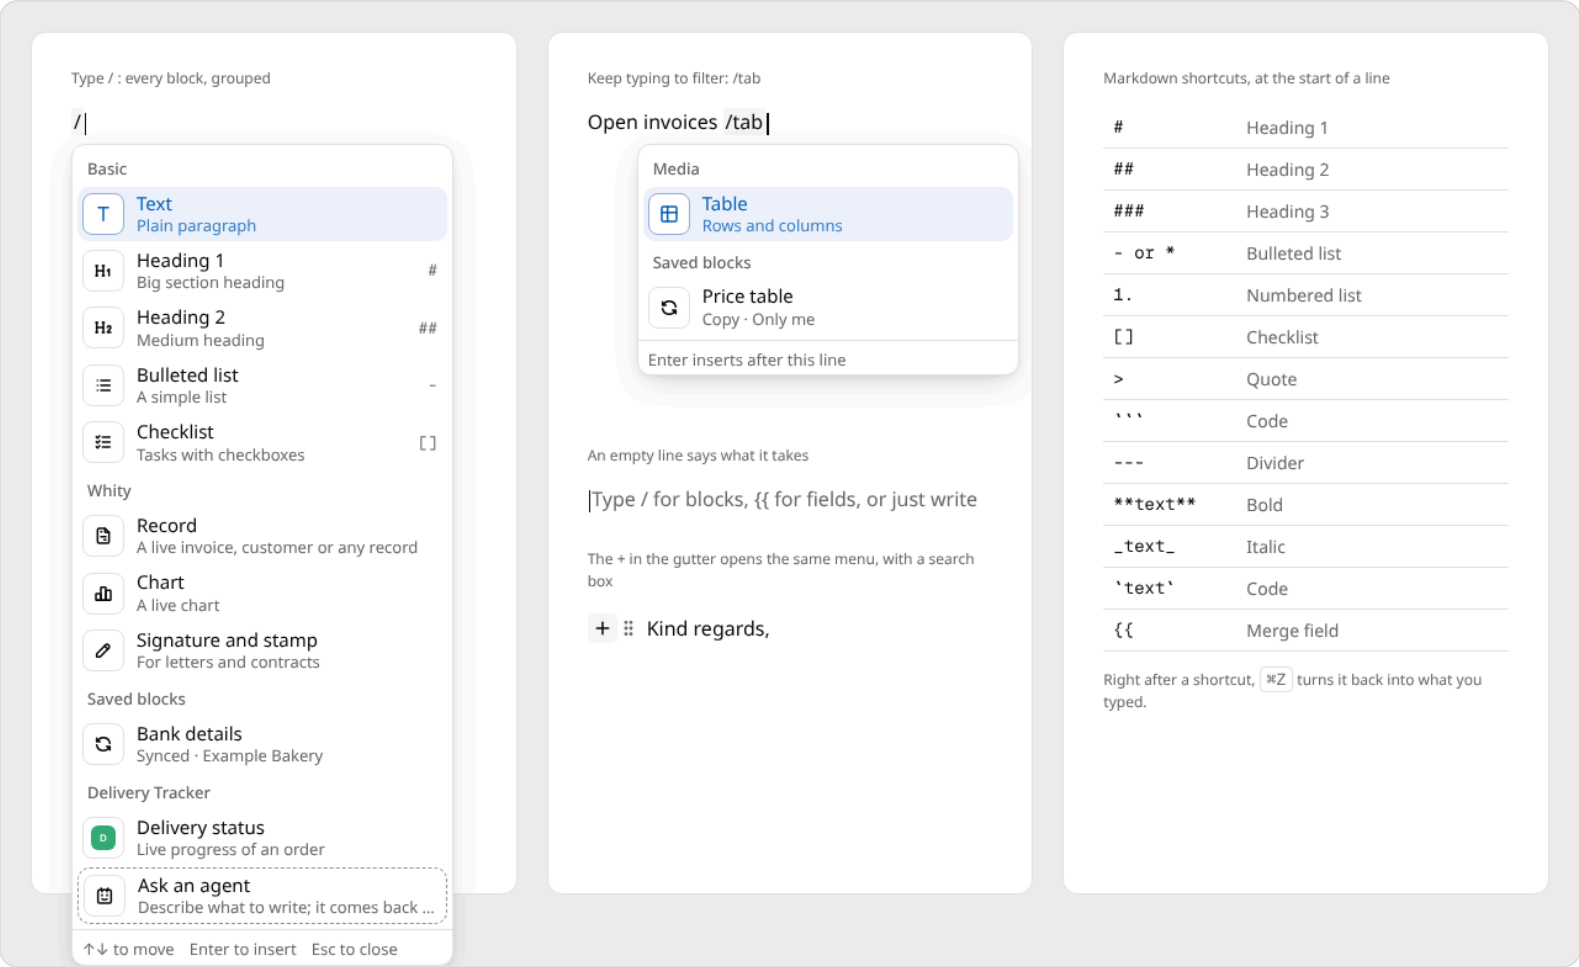

The / menu, filtering, empty line, Markdown shortcuts

IN USE


Comments and suggestions

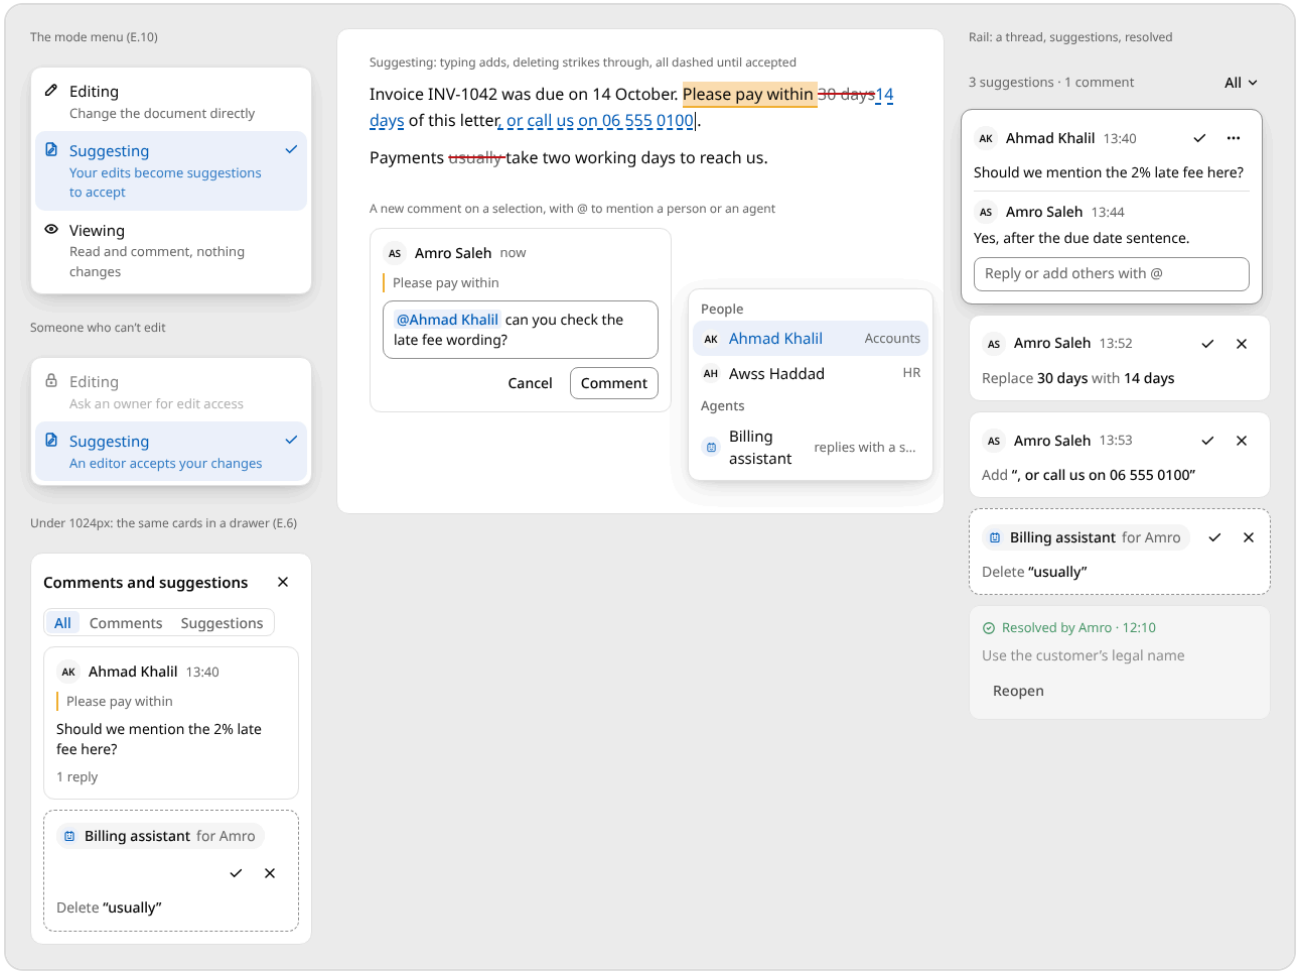

Modes, suggesting, comments, the rail and the drawer

IN USE

Agents in the editor (dark)

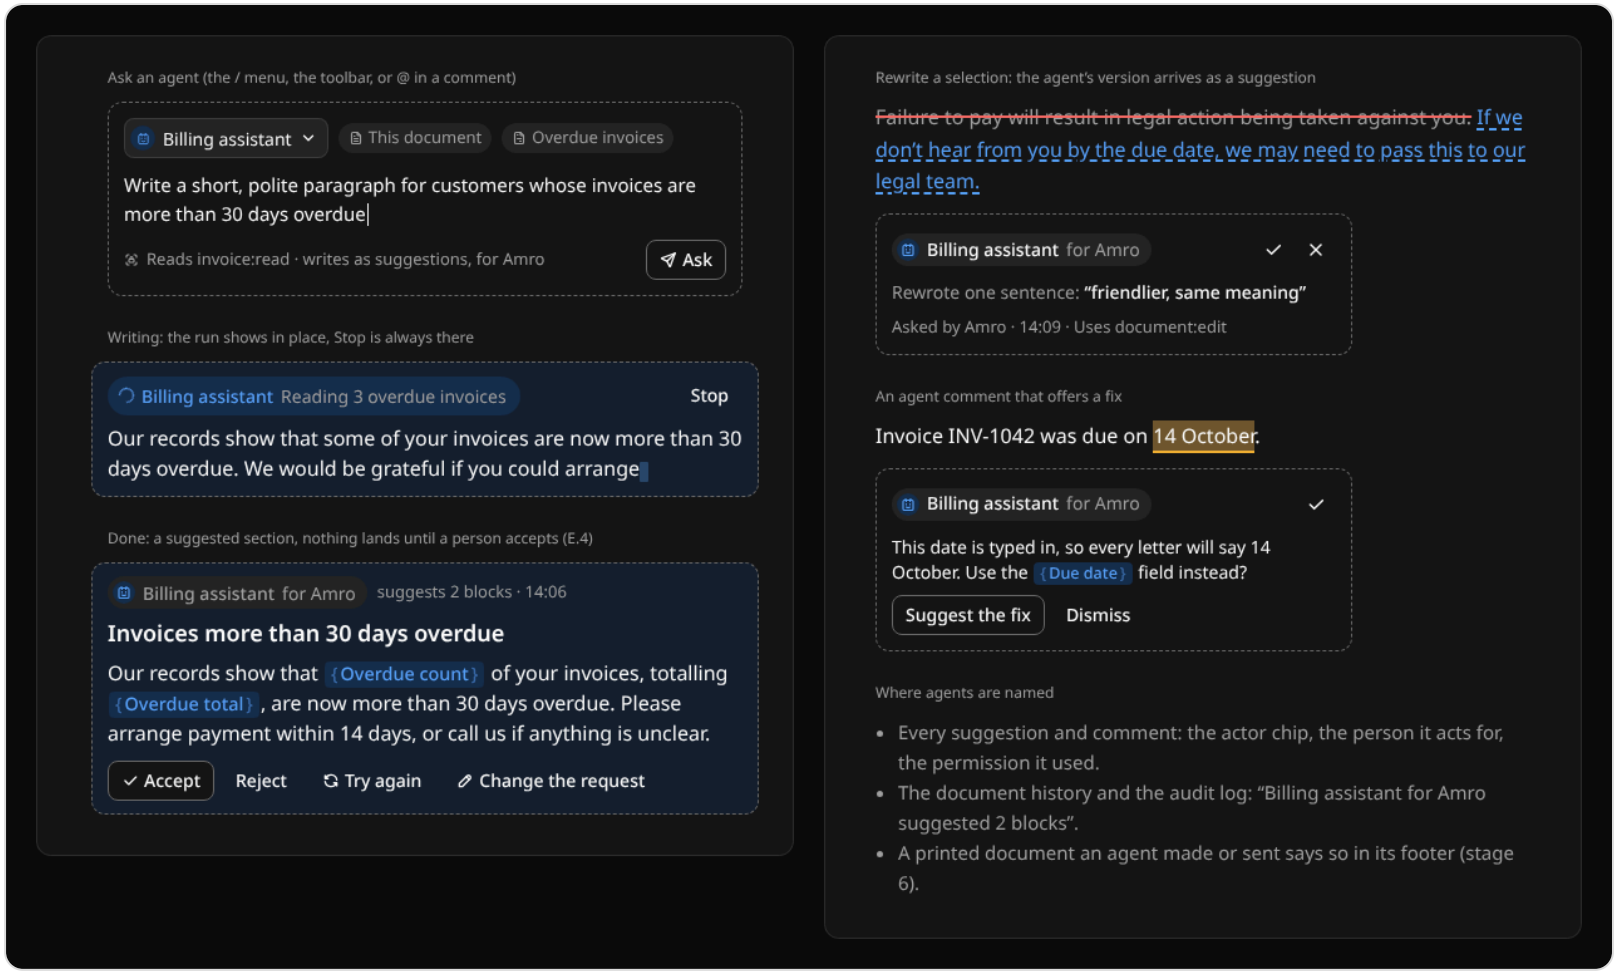

Asking an agent, writing, suggested blocks, rewrite (dark)

IN USE

Editor typography

On screen: the continuous sheet

Payment terms

How to pay

Bank transfer

Pay by bank transfer to Example Bank, with the invoice number as the reference. Payments take two working days.

التحويل البنكي

ادفع بتحويل بنكي إلى Example Bank مع رقم الفاتورة مرجعاً. تستغرق الدفعات يومَي عمل.

Title	Readex Pro 600 · 31 / 1.15	`brand H2, -1%`
Heading 1	Noto Sans 600 · 24 / 1.25	`title-page`
Heading 2	Noto Sans 600 · 20 / 1.3	`title-section`
Heading 3	Noto Sans 600 · 18 / 1.35	`title-card`
Body	Noto Sans 400 · 16 / 1.5 (Arabic 1.7)	`text-lg`
Measure	616px text, at most 68 characters	`sheet 760, sides 72`

On paper: the page view at 100% (stage 6)

Payment terms

How to pay

Bank transfer

Pay by bank transfer to Example Bank, with the invoice number as the reference. Payments take two working days.

التحويل البنكي


ادفع بتحويل بنكي إلى Example Bank مع رقم الفاتورة مرجعاً. تستغرق الدفعات يومَي عمل.

Title	Readex Pro 600 · 22 pt	`doc-accent (tenant)`
Heading 1	Noto Sans 600 · 14 pt	`ink`
Heading 2	Noto Sans 600 · 12 pt	`ink`
Heading 3	Noto Sans 600 · 10.5 pt	`ink`
Body	Noto Sans 400 · 9.5 pt / 1.5 (Arabic 1.7)	`labels 8.5 pt`
Measure	178 mm on A4 (16 mm margins)	`stage 6`

On screen and on paper, in both languages

IN USE


The editor in Arabic

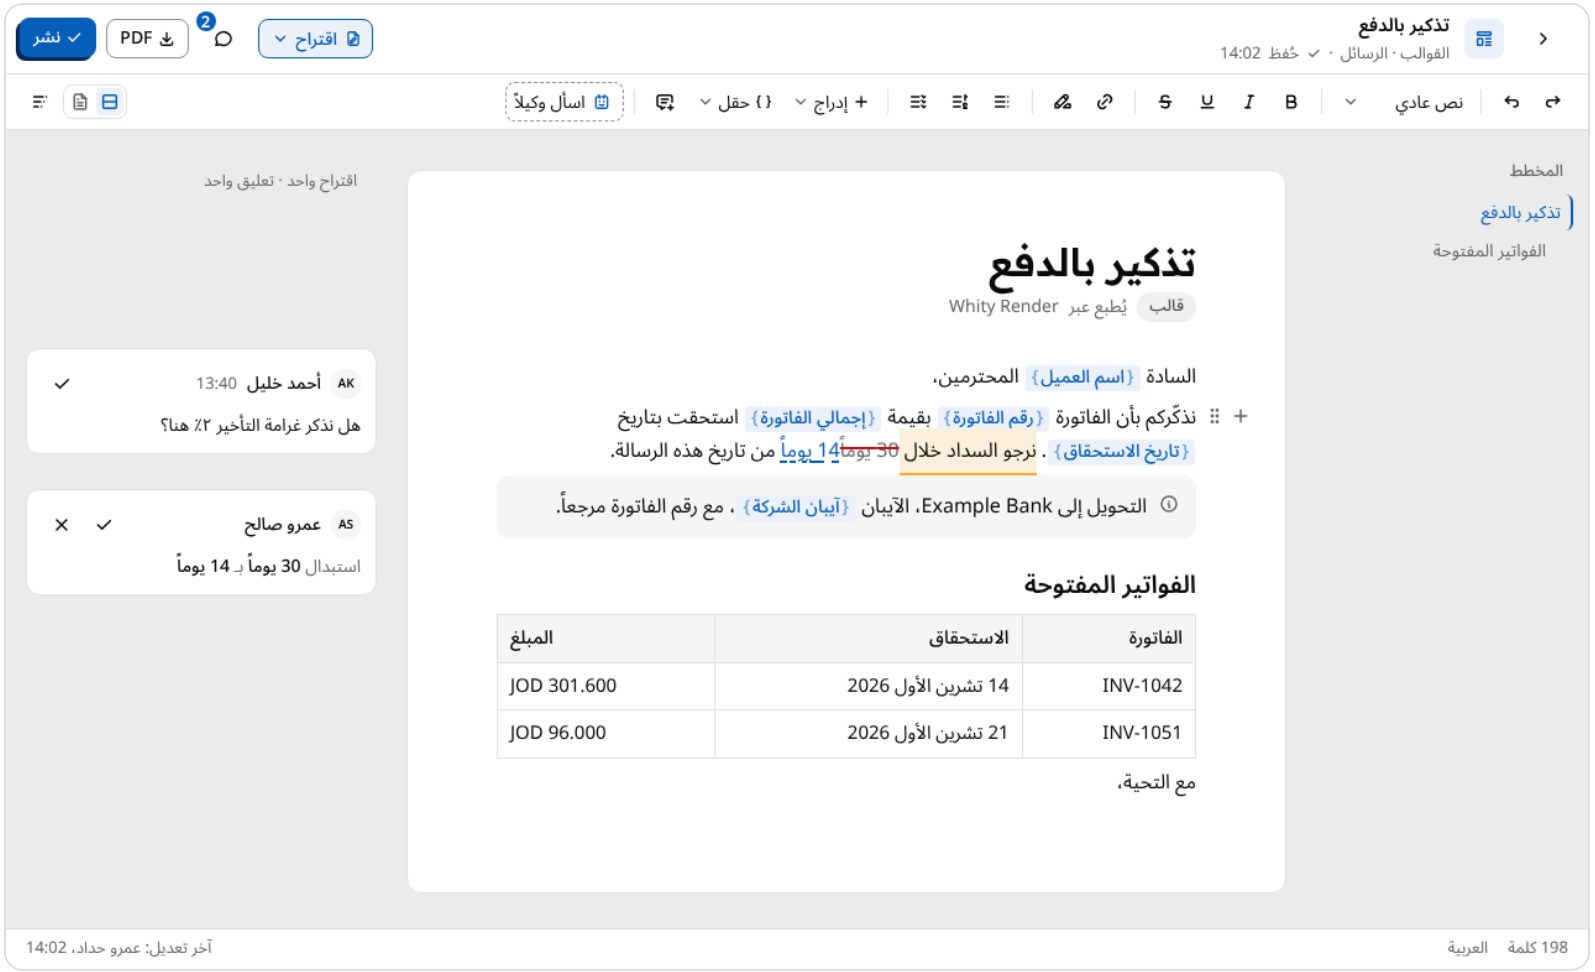

Right to left: everything mirrors except numbers and fields

IN USE

Document designer (A33): the publish check

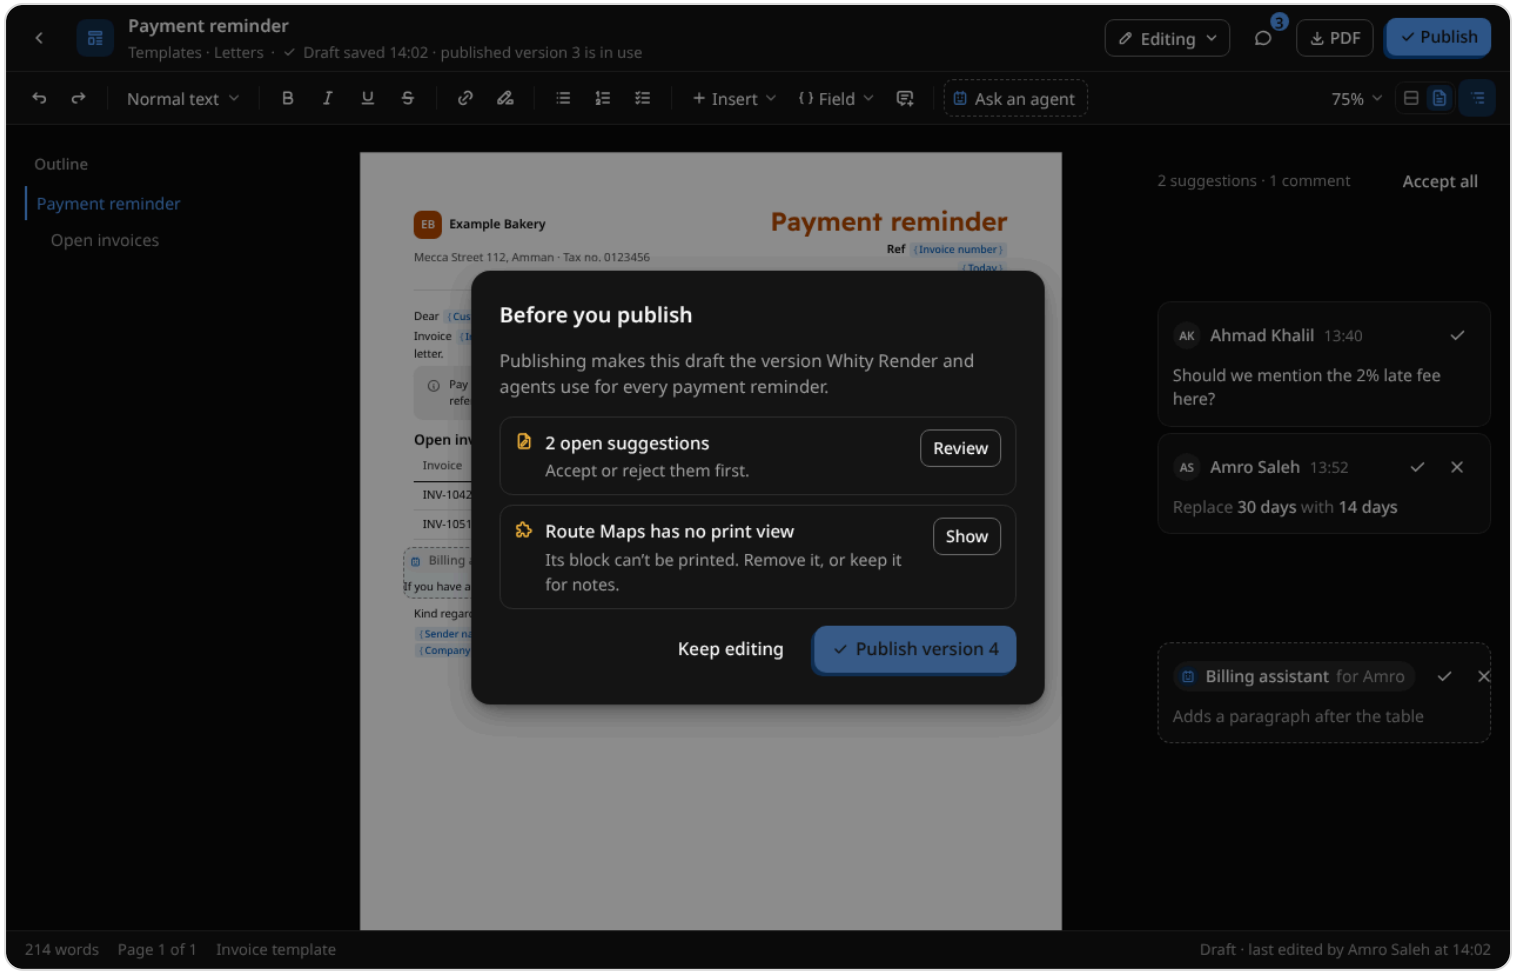

Publishing a template: what blocks it · dark

SECTION 19

Plugin store

Where a workspace adds apps, document blocks and agent tools. It lives inside each workspace first: one sidebar item, Plugins, opens a page with two tabs, Store (`/admin/plugins/store`) and Installed (`/admin/plugins`) (A41, S.10); a public marketplace site will reuse the same pages later (S.1). Decisions S.1–S.12; cards in the "Templates · Plugin store" group, shown on the pages after this section.

The store

Part	What it holds
Search and categories	One search box (names, publishers, what a plugin adds) and one category switch: All, Finance, Sales, People, Operations, Documents, Agents
Made by Whity	First-party apps and services (Front Office, Whity Render, Whity ID) as wide cards with a blueprint strip
Sections	Most used by workspaces like yours, New, Updated, Tools for your agents; each with See all
Plugin tile	The publisher's logo, the name, the publisher and its trust mark, one line, what it adds, how many workspaces use it, the price

Names: third-party plugins are named for their job, as "[Job] for Whity" (Inventory for Whity) or with a plain name (Delivery Tracker). Names that start with "Whity" are kept for first-party products.

Trust (S.4): By Whity (first party), Verified (the publisher is checked, and the plugin is a signed declaration drawn with Whity components) or Not verified (its code runs on the server once it's on, and the page says so plainly). Alongside: the permissions it asks for, "Used by N workspaces" and the last update. No ratings or reviews until there are enough installs for them to mean something.

What it adds: small chips on every tile: Screens, Document blocks, Agent tools (on the primary tint, like everything agents do), Fields, Connects out. They answer "what changes in my workspace" before anyone opens the page.

A plugin's page

The header carries the logo, the name, the publisher, the trust mark and usage, one line, what it adds, and **Install**, the one action on the plane, with the price and "billed on your Whity invoice" (S.2). Tabs: Overview, Permissions, Changelog, Support.

The Overview shows screenshots drawn with real Whity components, a short description and **What it adds** in three boxes: Screens, Document blocks (each marked Prints or Notes only, E.18) and Agent tools (dashed), with the mode each tool starts in. The **Facts** panel beside it lists the publisher, how it runs, version and update date, languages, usage, billing and support; anything sent outside the workspace is named in a warning box with its domain.

Installing

Anyone whose role has `plugins:install` can install (S.3, S.9); `plugins:read` is enough to browse. Uploading a plugin's .zip, unreviewed code, is a separate operator permission, `plugins:upload`. Without it, Install is disabled with "Ask someone with permission to install plugins" and an **Ask to install** request. Agents can't install directly: with Ask first, an install becomes a proposal like any other action (7.5).

One dialog, with a Stepper, in up to four steps; steps that don't apply are left out:

1. **Access:** plain sentences for each permission, with the codes underneath; the screens, blocks and agent tools it adds; every outside domain in a warning row. "Allow and continue" is the consent, logged with the person and the list.
2. **Plan** (paid plugins): monthly or yearly, billed on the Whity invoice. A publisher may offer a free trial of a set length; the dialog says when billing starts and that a reminder comes before it (S.8).
3. **Set up** (if the plugin declares settings): Whity form components; "Skip for now" leaves a "Finish setting up" banner on the plugin's screens.
4. **Done:** where each added thing lives, with links. Verified and By Whity plugins are active from here; a Not verified plugin installs turned off, and Done offers **Turn on** (S.12).

Every agent tool a plugin adds starts on **Ask first**; read-only tools may start Allowed. Admins change modes afterwards in MCP tools (S.5).

Installed plugins

The Installed tab lists every plugin with its state, version and billing. States: Active, Trial, Update waiting, Failed, Turned off. The row menu holds Open, Settings, Details, Agent tools, Turn off or on, and Uninstall.

Operator tools (S.11). People with `plugins:upload` get a ⋯ menu on the Installed tab with Upload plugin and Reload plugins. Store sources and their access tokens live in Settings › Advanced, not on the browsing page. A failed plugin's Details drawer explains the error in plain words, with the stack trace under Technical details, collapsed.


- **Updates (S.6):** a Verified declarative plugin's updates install automatically and say so in the Version column; a code plugin only updates by hand. An update that asks for new permissions or new outside domains waits for approval: a warning banner names what's new, "Review access" opens the Access step with only the changes, and the old version keeps running meanwhile. Every update is in the audit log.
- **Failed:** the plugin didn't load; its blocks show the plugin-off placeholder (E.20); the row menu offers Try again and Roll back.
- **Uninstalling (S.7)** keeps the plugin's data for 30 days under "Recently removed", with Reinstall, which restores everything. Its document blocks show the placeholder meanwhile; after 30 days the data is deleted.

Still to draw

The publisher's page, search results with filters, the request-to-install flow for people without permission, the public marketplace site, and Arabic versions of the store cards.

IN USE


The store (A41)

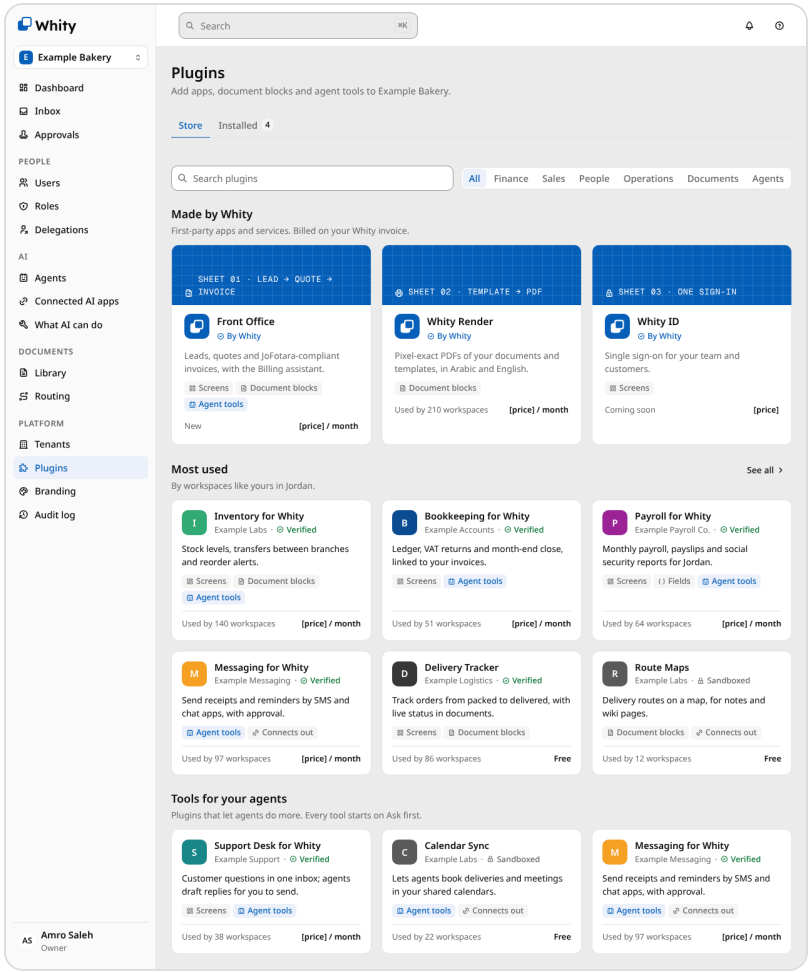

Store home

IN USE


A plugin’s page

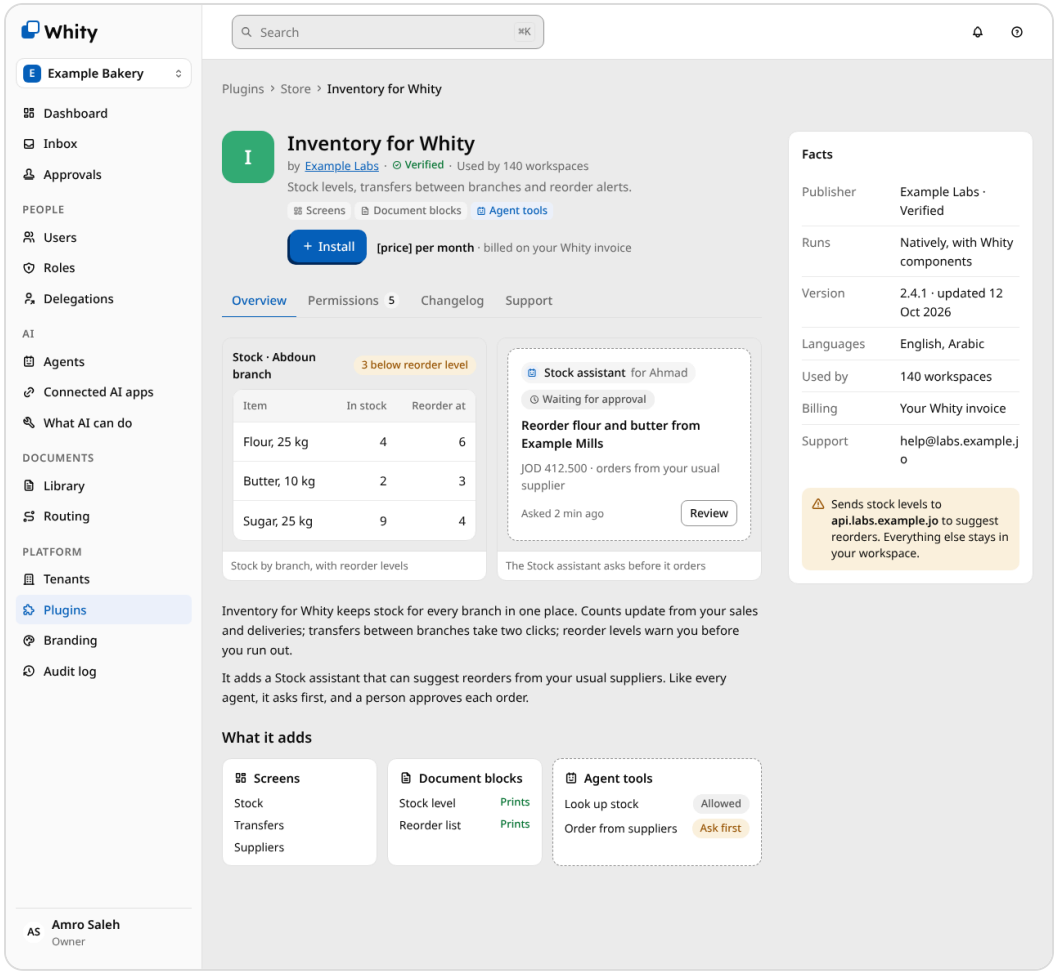

Plugin page

IN USE


Installing: access, plan, set up, done (dark)

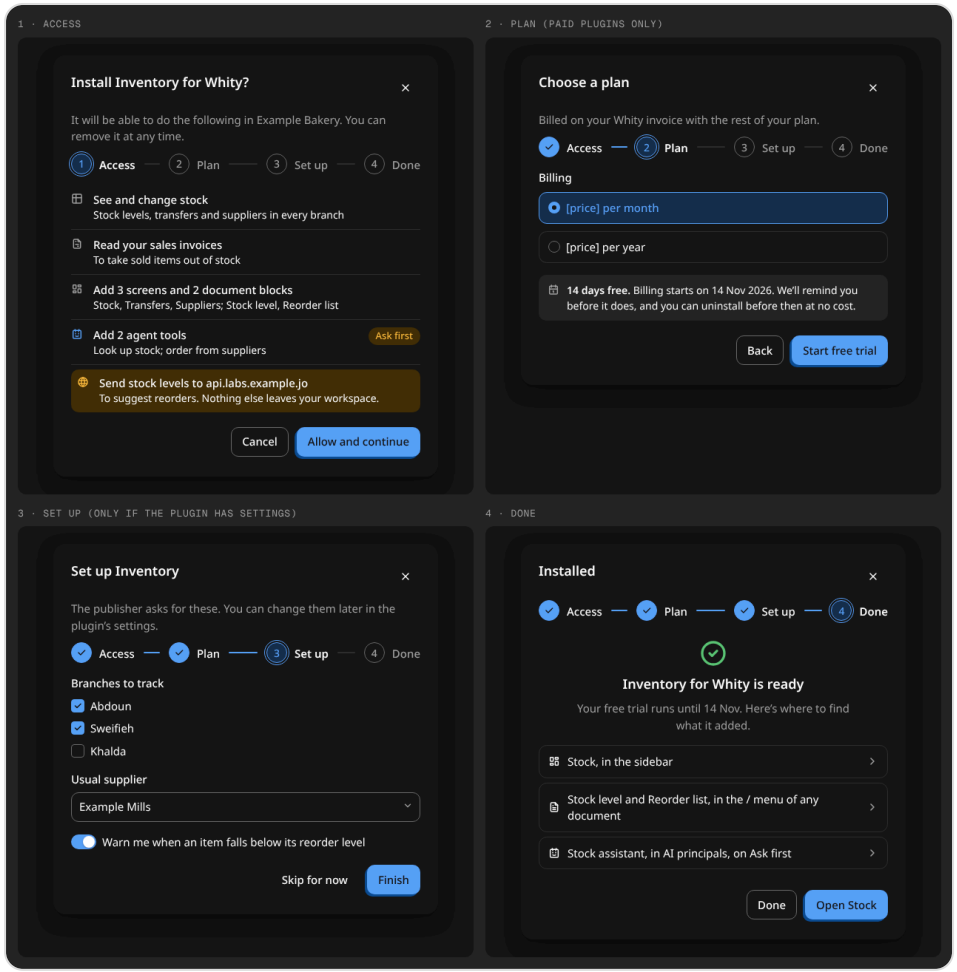

Install dialog, every step

IN USE

Installed plugins

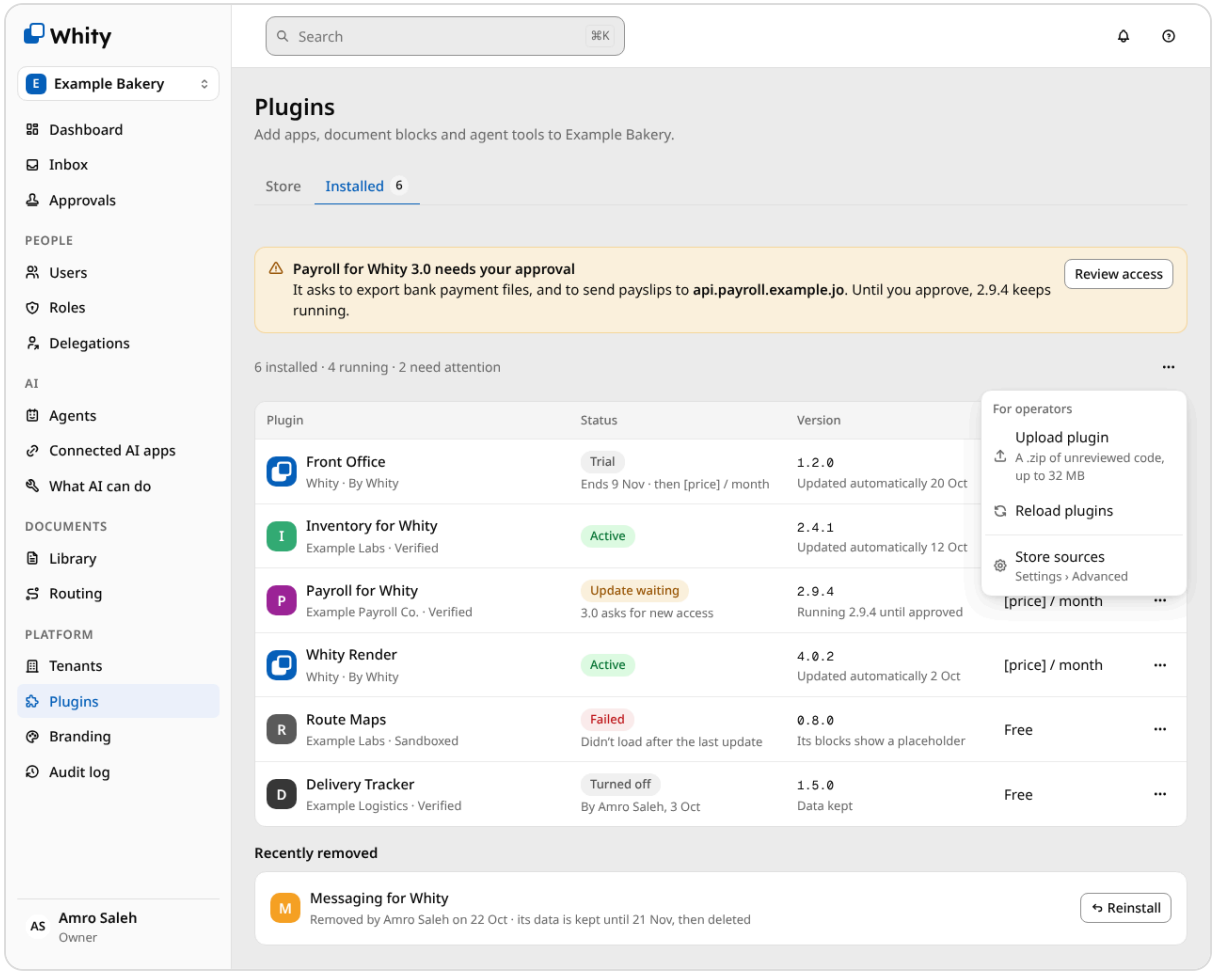

Installed tab

SECTION 20

Home

The page everyone lands on after signing in: `/dashboard`, the sidebar's Dashboard. It replaces the placeholder welcome page and the Dashboard link to server statistics. Decisions H.1–H.4; cards in the "Templates · Home" group.

One home, built per person

There is one home (H.1). Each card appears only when the person can see what it shows, so an owner, a member of staff and an operator get different pages from the same design. Nothing is a separate layout. System-tenant operators get the platform cards of the admin dashboard below Waiting for you.

Part	Who sees it	What it holds
Greeting	Everyone	"Good morning, Amro", the date and the workspace (and branch, if the person has one)
Waiting for you	Everyone	Inbox documents and agent proposals, merged, oldest first, with inline decisions (H.2)
Agents today	People with agents	The day's agent activity with a summary: done, waiting, undone
Finish setting up	Owners and admins, until done	The steps that block real work, each with why it matters
From your apps	Per app permission	One card per installed app (H.4)
Platform cards	System-tenant operators	Tenants, agent actions, plugin health, the tenant table

Waiting for you

It always comes first (H.2). Each row has an icon tile, a title with the amount in mono, who it's from (a person, or an agent "for you"), why and how long ago, and the decision. Agent proposals are dashed with the robot tile until a person decides, as everywhere. Decisions sit inline as outline buttons, Approve beside a ghost Decline or Reject, or Open when the item needs reading first; the home has no filled main button. Approving shows the Undo toast. At most six rows, then "and N more"; the footer links to Inbox and Approvals with their counts.

When nothing waits, the card collapses to one line ("Nothing is waiting for you."), so the page never opens on an empty box.

Cards from apps


Each installed app may add one card (H.4), declared in its manifest. The card names its app with its logo, shows one number that matters, a few lines and at most one chart, and links into the app. Its ⋯ menu has Hide from home and Open. Hidden cards are listed at the foot of the page with Show. Cards follow install order and can't be rearranged in this version. A card shows only the person's scope: a branch manager's Stock card counts their branch.

System

Server statistics leave the Dashboard link. `/admin/stats` becomes **System**, under Platform, for system-tenant operators only (H.3), and its numbers feed the operators' platform cards.

IN USE


Home: an owner

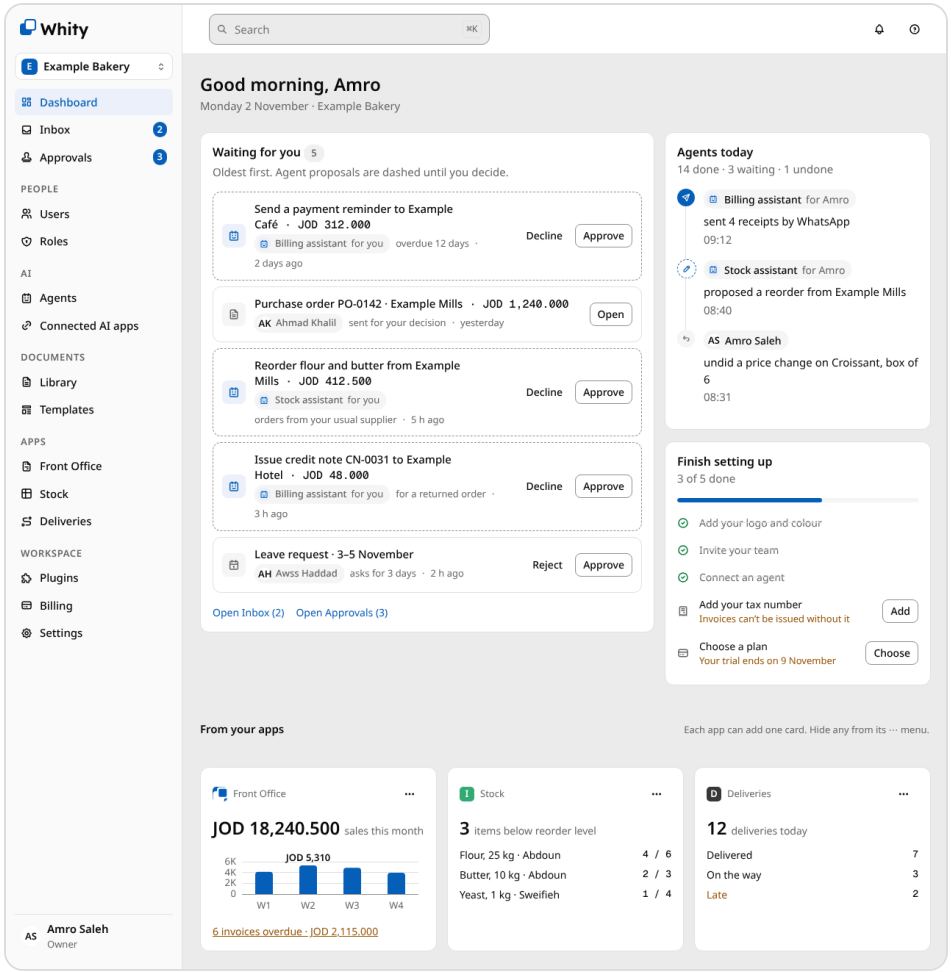

Home, built for an owner

IN USE

Home: a member with nothing waiting (dark)

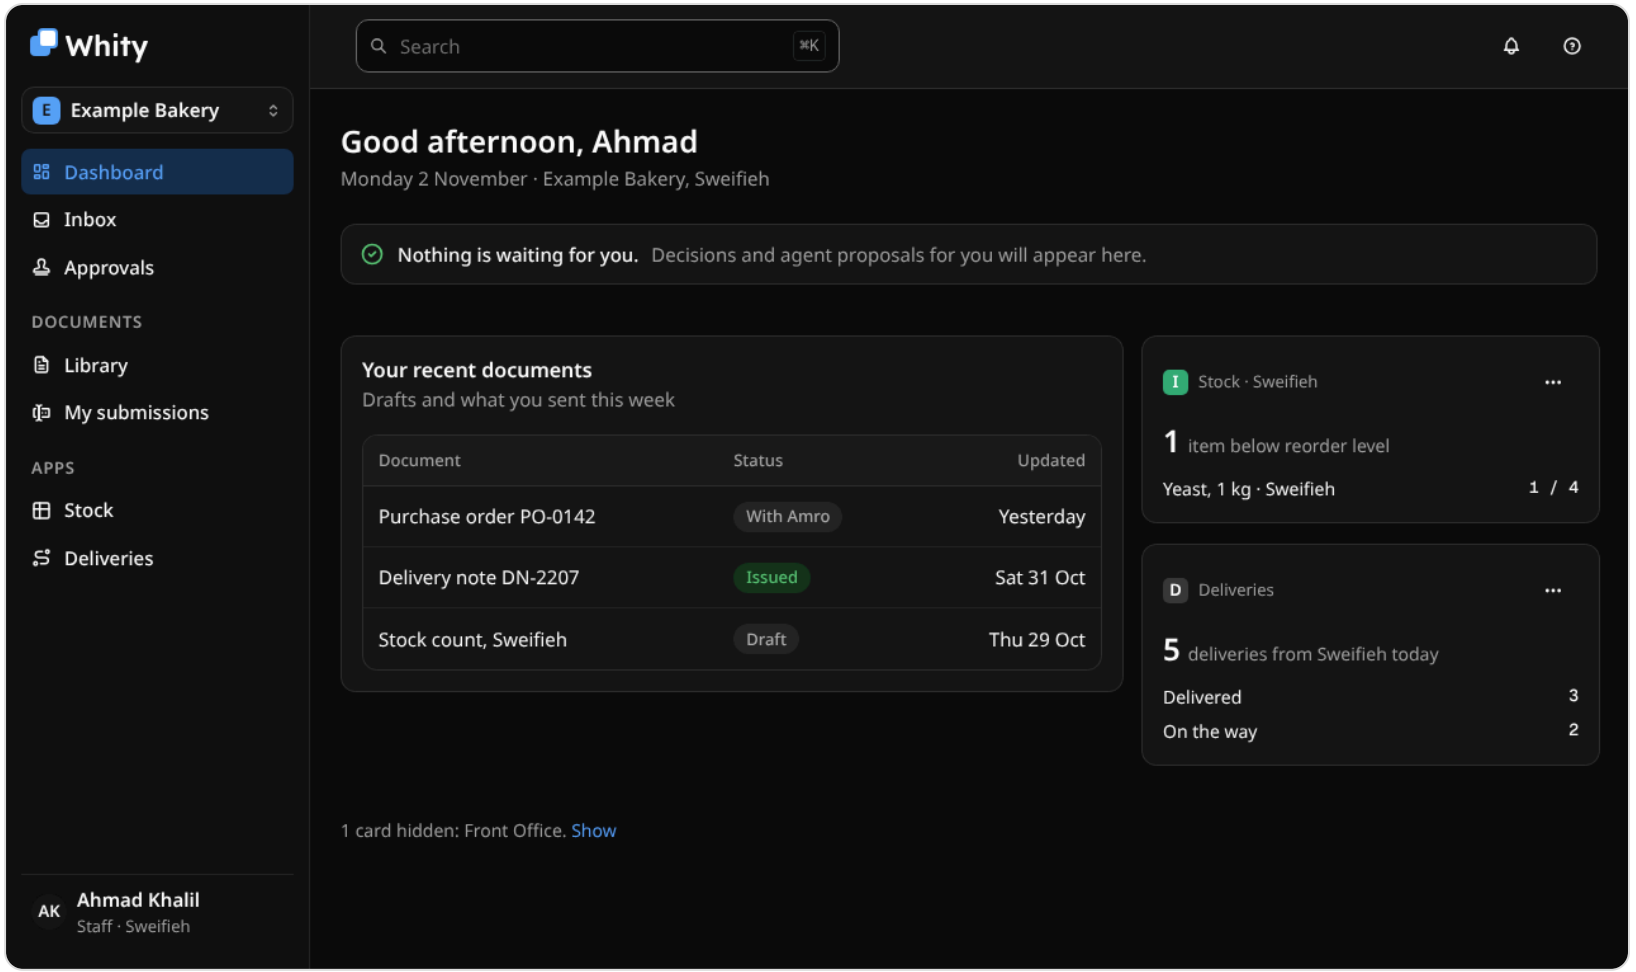

The same home for a member of staff

SECTION 21

Page patterns and people

Version 2.5 sets the patterns every remaining screen uses (decisions P.1–P.4, V.1–V.4), then applies them to the People screens and the Inbox. Cards: "Patterns" and "Templates · People and inbox".

The sidebar

The sidebar follows the built app's groups, in sentence case: (top) Dashboard, Inbox, Approvals, My submissions; People; AI; Documents; Workspace; and Platform for system-tenant operators. Only the current group is open; the others fold to their label with a chevron (`AppShell` nav groups take `collapsed`). Labels are translated like every other string.

List pages

Page header with the one main action (Invite people, New role) and a ⋯ for the rest; tabs when the page has views; a filter bar (search, filter buttons that tint and name their value when set, a segmented status switch); then the table. Selecting rows brings the bulk bar. Every row opens something (P.1): a full **record page** for things with history and settings (people, roles, workspaces), a **drawer** for small things (a group, a unit, a delegation, a relative).

People appear as names with avatars, never as ids ("Role #3", "OU #5", a Tenant ID column). Units, roles and dates are words.

Record pages

A header with the icon or avatar, the name, a status badge, a line of key facts, and actions (outline, plus ⋯). Then tabs: **Overview**, **Access**, **History** (P.2). History is written in words ("Amro changed his unit from Sweifieh to Abdoun"), never event codes.

Fields are edited where they are (P.3). A changed field gets the primary ring and a "Was …" note; a sticky save bar names the changes and offers Discard and **Save changes**, the page's one main button. Leaving with unsaved changes asks first.

States

Drawn once, used everywhere (V.2): loading (skeleton rows in the real layout), empty for the first time (what the place is for and the action that fills it), empty after a filter (names the filter, Clear filters), error (in the failed area, with Try again), read-only (an alert naming the permission and who grants it; fields disabled, actions hidden) and access denied (what's behind it, the permission, who can give it, Ask for access).

Confirming

By how undoable an action is (P.4): undoable actions happen at once with **Undo**; hard-to-undo ones ask in a dialog that names the consequence; security-sensitive or irreversible ones also need the name or email typed. The button repeats the verb. Two-step and password-reset approvals, sign-up rejections and user deactivation, unconfirmed in the built app, now follow these tiers.


The People screens

Screen	Pattern	Notes
Inbox (A02)	List	Tabs per source; Waiting for me or Including done; states the app composes and translates
Users (A10)	List + record	Invite people; filters for role, unit, two-step; bulk change role; the record has Overview, Access, History and the save bar
Roles (A12)	List + record	Built-in roles marked and read-only; the Access tab is a grid of areas by See, Create, Change, Delete, Approve
User groups (A11)	List + drawer	Groups are rules; the drawer shows who is in it right now
Organisational units (A13)	Tree + drawer	Tree or chart; actions only with `ous:write`
Delegations (A14)	List	From → to in names, what, where, until
Family relations (A15)	List + drawer	Relatives without accounts; search across everyone
Approval gating (A16, A48)	Tabs + rows	Request dates; tier-3 confirmation for resets

The 2.5 Arabic card is the user record (`TplUserRecordAr`).

IN USE

Page states: loading, empty, filtered, error, read-only, access denied

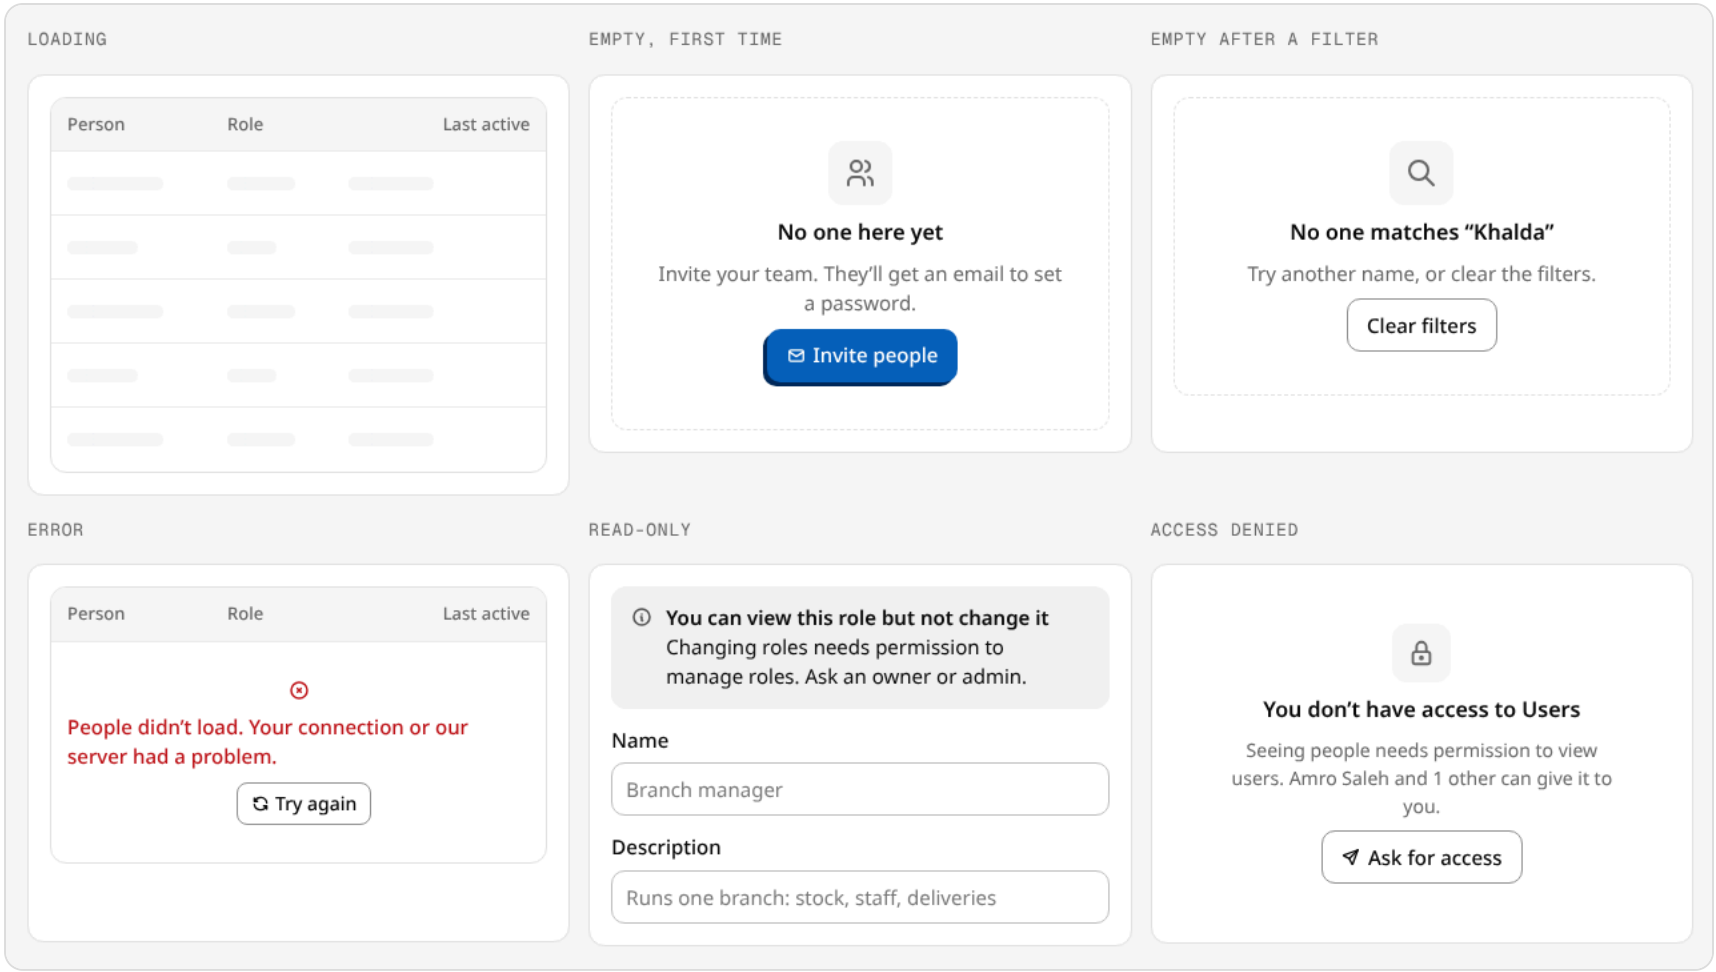


IN USE

Confirming by how undoable an action is


1 · Undoable: act, then offer Undo

Deactivate a user, retire a promotion, hide a card, archive. It happens at once; the toast offers Undo for 10 seconds, and the record keeps a Reactivate.




2 · Hard to undo: a dialog that names the consequence

Delete a role, a unit or a group; reject a sign-up; revoke an AI credential. The title is the question; the text says what happens to people and data.

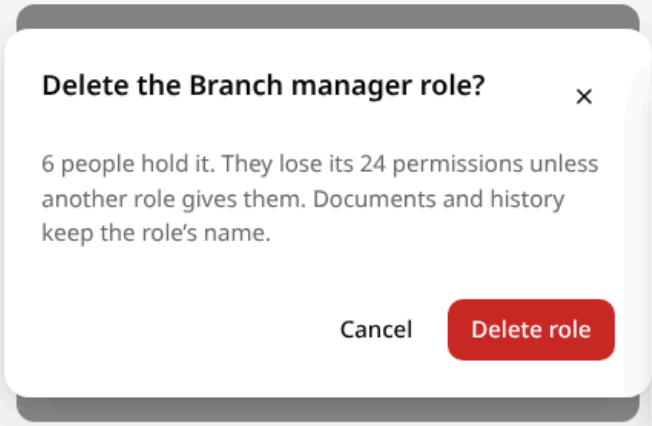


3 · Security or irreversible: the dialog, and type the name

Clear someone's two-step, approve a password reset, delete a workspace, uninstall with data. The action stays disabled until the name is typed.

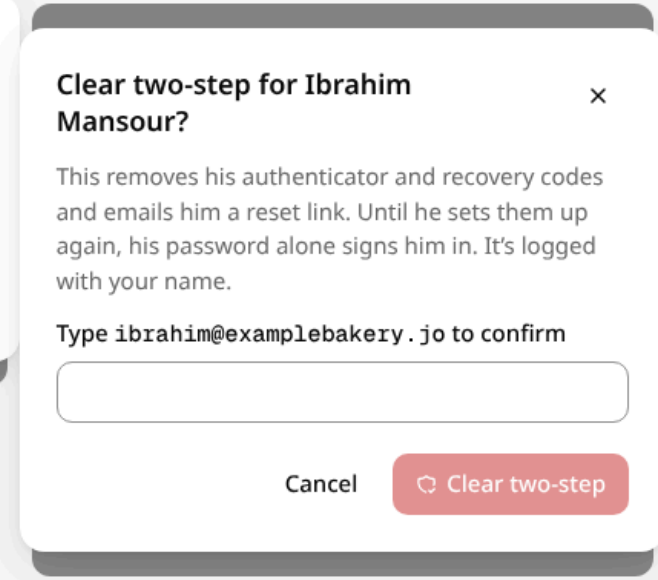


IN USE

Users: the list pattern

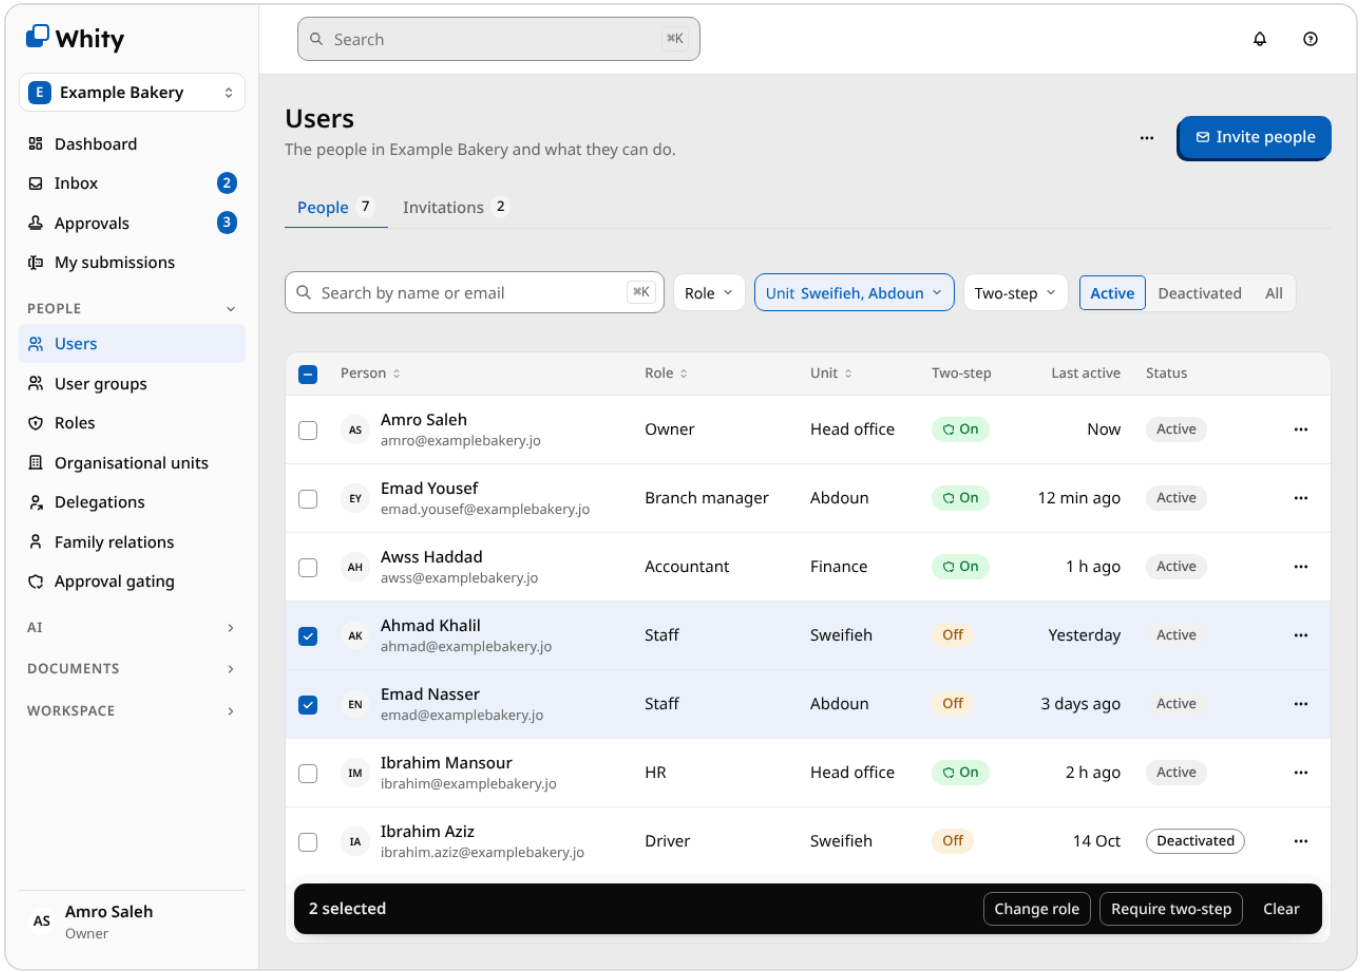


IN USE

A person’s page: tabs and the save bar

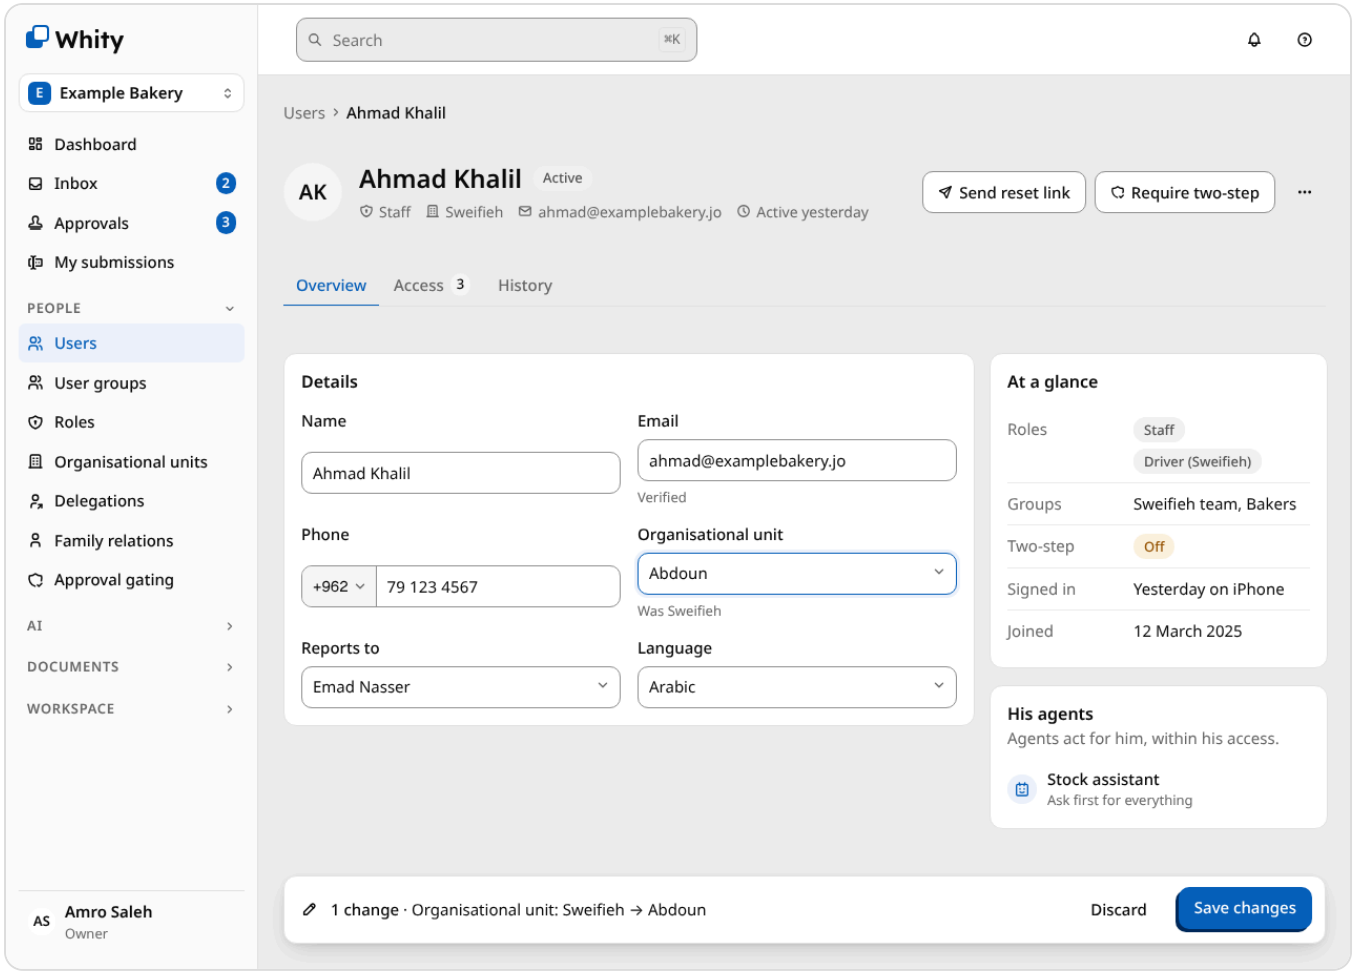


IN USE

A person’s page in Arabic

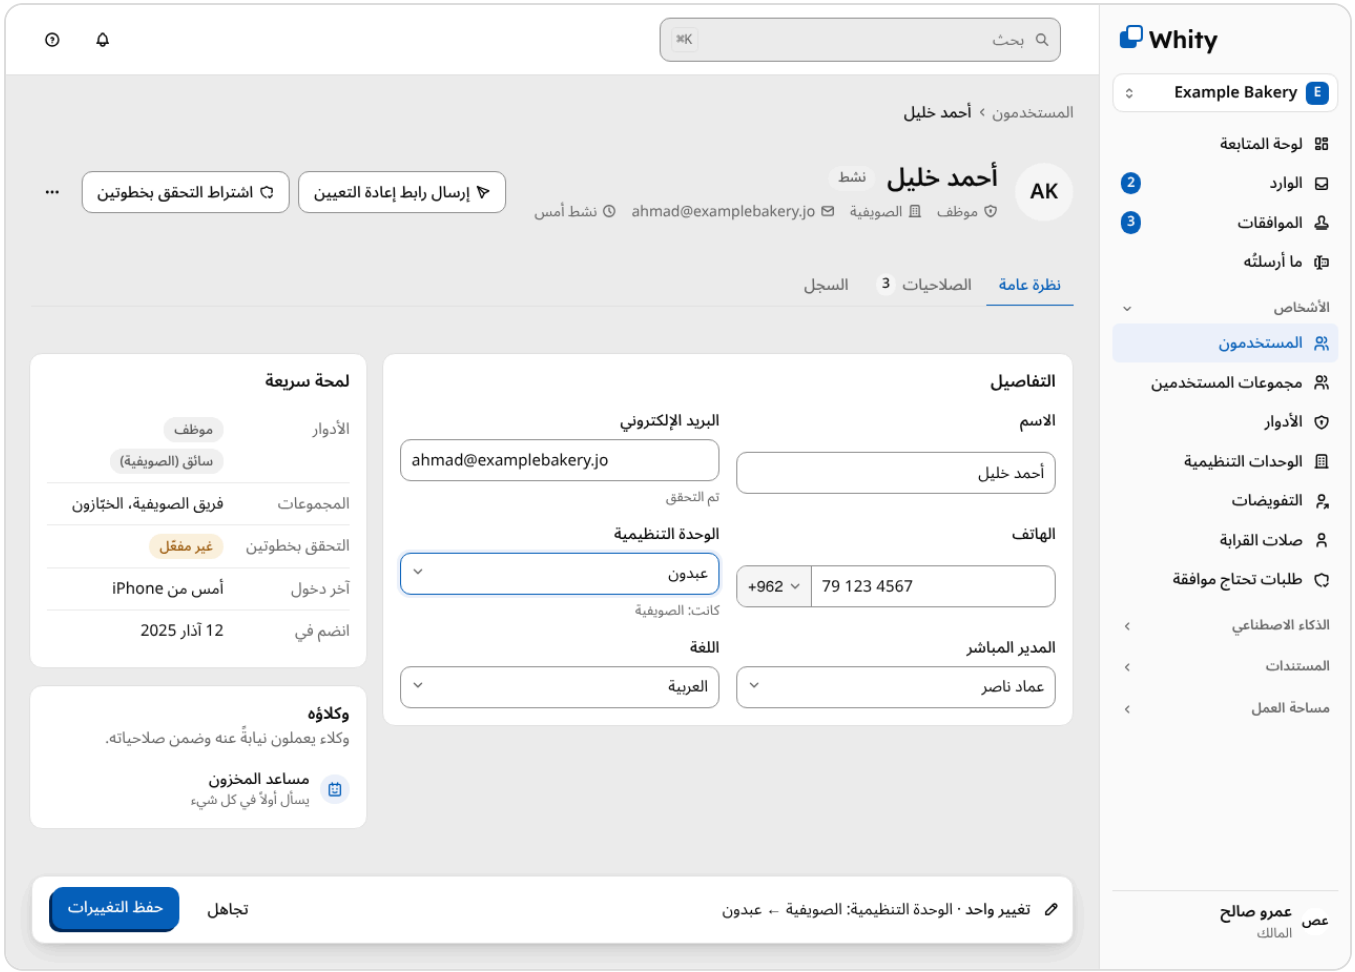

IN USE

A role’s access (dark)

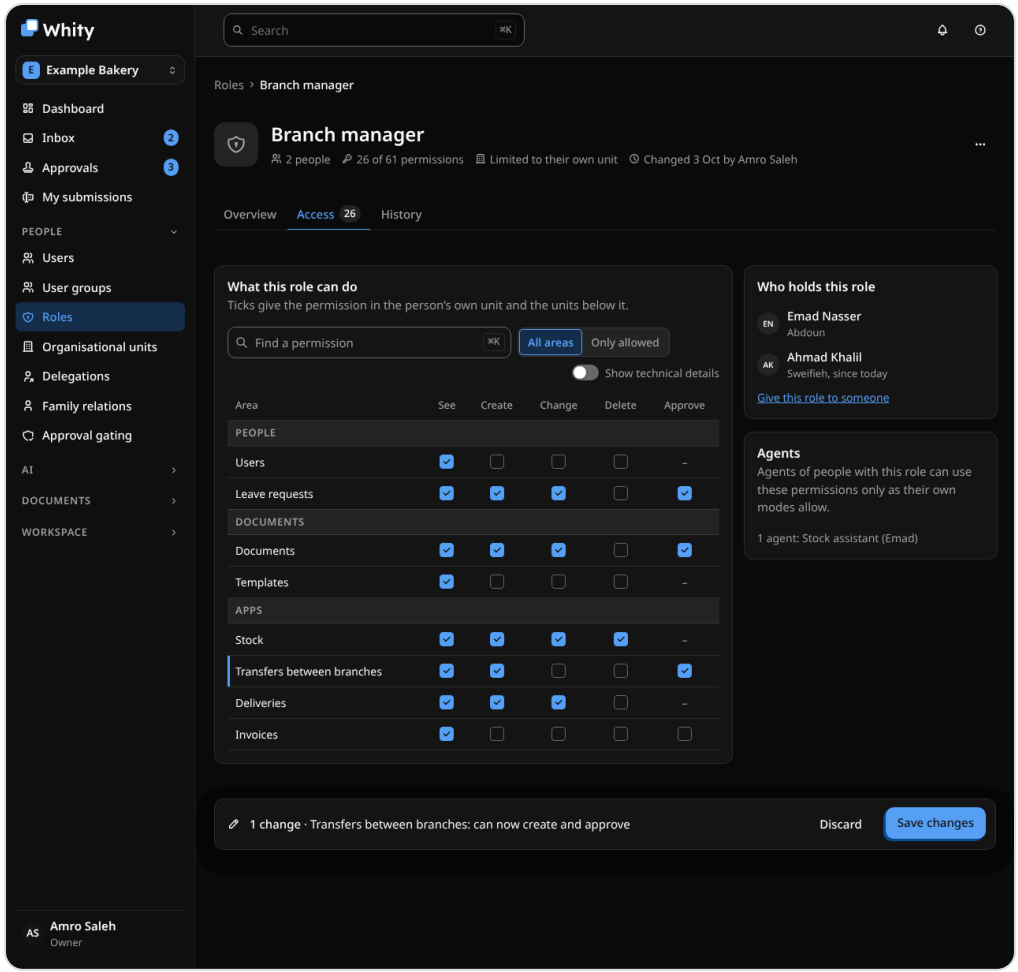

SECTION 22

Forms

Version 2.6: building forms, filling them in, the public form and responses (decisions F.1–F.4). Cards: "Templates · Forms".

Building

A form is a record (P.2) with three tabs: **Questions**, **Responses**, **Settings**. The Questions tab is the builder (F.1): the form as people will see it, on the grey ground, with the selected question's settings in a side panel.

- Sections carry a bar in the main colour; questions are cards with their number, title, required star, help, type and a preview of the answer.
- Selecting a question rings it in the main colour and shows move, duplicate and delete.
- **Add question** between cards offers the ten kinds the platform has: short text, long text, number, date, choose one, choose several, checkbox, file, person, unit.
- The settings panel holds type, wording, help, options, Required, **Show this question** (Always or Only if …) and **Save the answer to** a field on a record. Questions with a condition show an "Only if …" pill on the canvas.
- Preview and **Publish** (the main button) sit in the header.

The Form builder list shows every form with its status (Draft, Open, Closed), who can fill it in words, responses and the last change.

Filling in

Short forms are one page. A form with sections shows them as steps with the Stepper, and the last step is Review (F.2). What the workspace already knows comes prefilled as a summary from the person's profile. The draft saves as people go, on the server, and the Forms page lists it under Continue where you left off. The description names who receives the form; the decision arrives in the Inbox. People see their own submissions, and where each is, in **My submissions**.

The public form

At `/f/[slug]`, the workspace's brand leads: its logo above the card, its colour on the card's edge, the main button and selections (F.3). A small **Built on Whity** sits in the footer with Privacy and the language switch. No sign-in, no app shell. Sent, closed and not available each give the visitor a way forward: a reference and when to expect a reply, how to reach the workspace, or to check the link.

Responses

The Responses tab (F.4) starts with a summary for each choice question, responses per week and where responses are in their routing, then a table. A response opens as a record with its answers, files and routing timeline. Export and Close the form sit in ⋯.


Fixed from the built app

All form text is translatable (the built forms were hardcoded English); choices are Whity radio buttons and selects instead of native dropdowns; the button names what happens ("Send application"), not "Submit".

The 2.6 Arabic card is the form builder (`TplFormBuilderAr`).


IN USE

The form builder

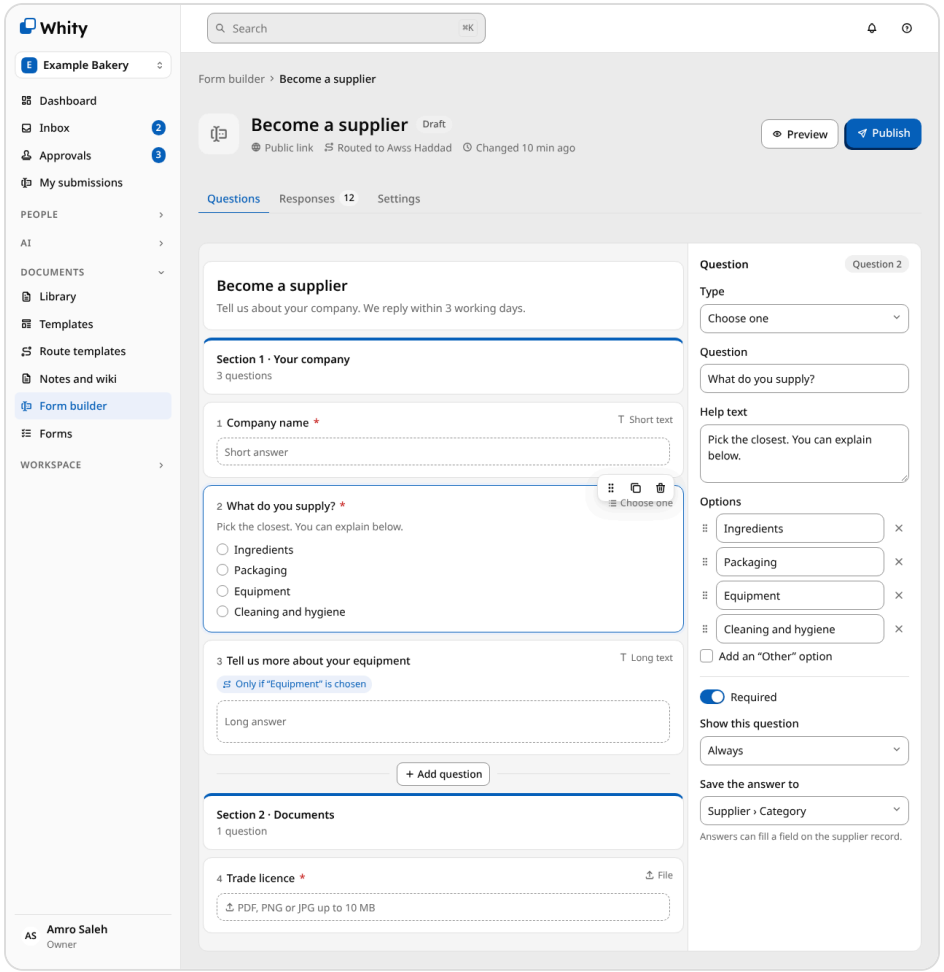


IN USE

The form builder in Arabic

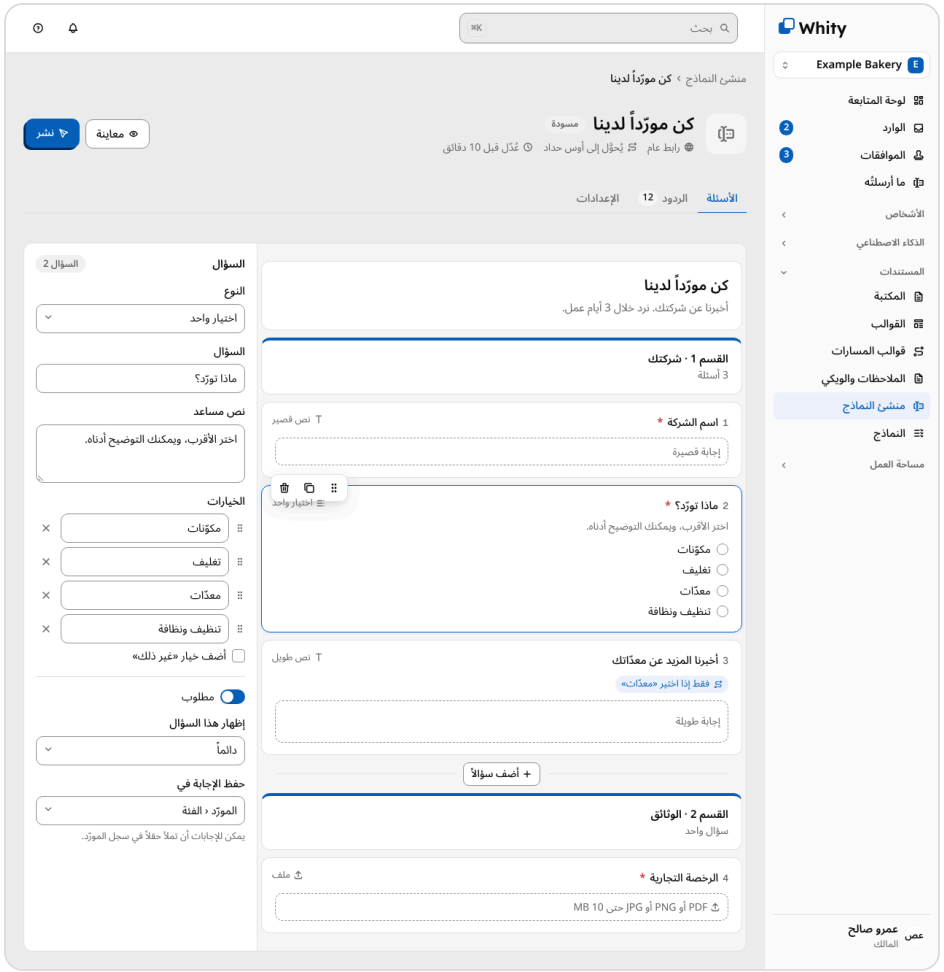


IN USE

Filling in, step by step

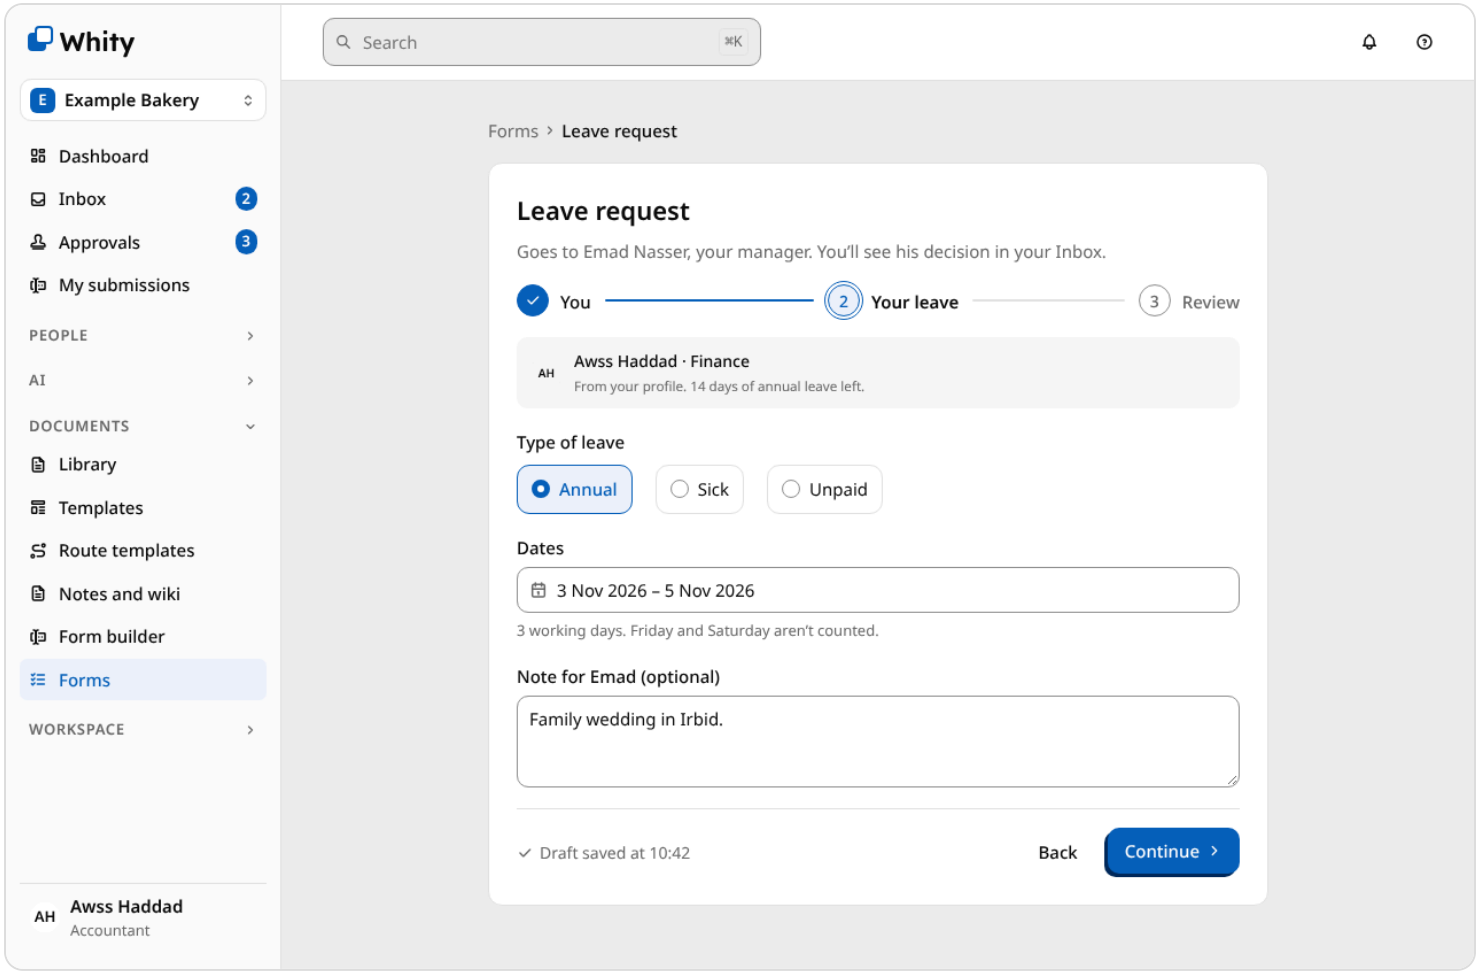


IN USE

A public form in the workspace’s brand

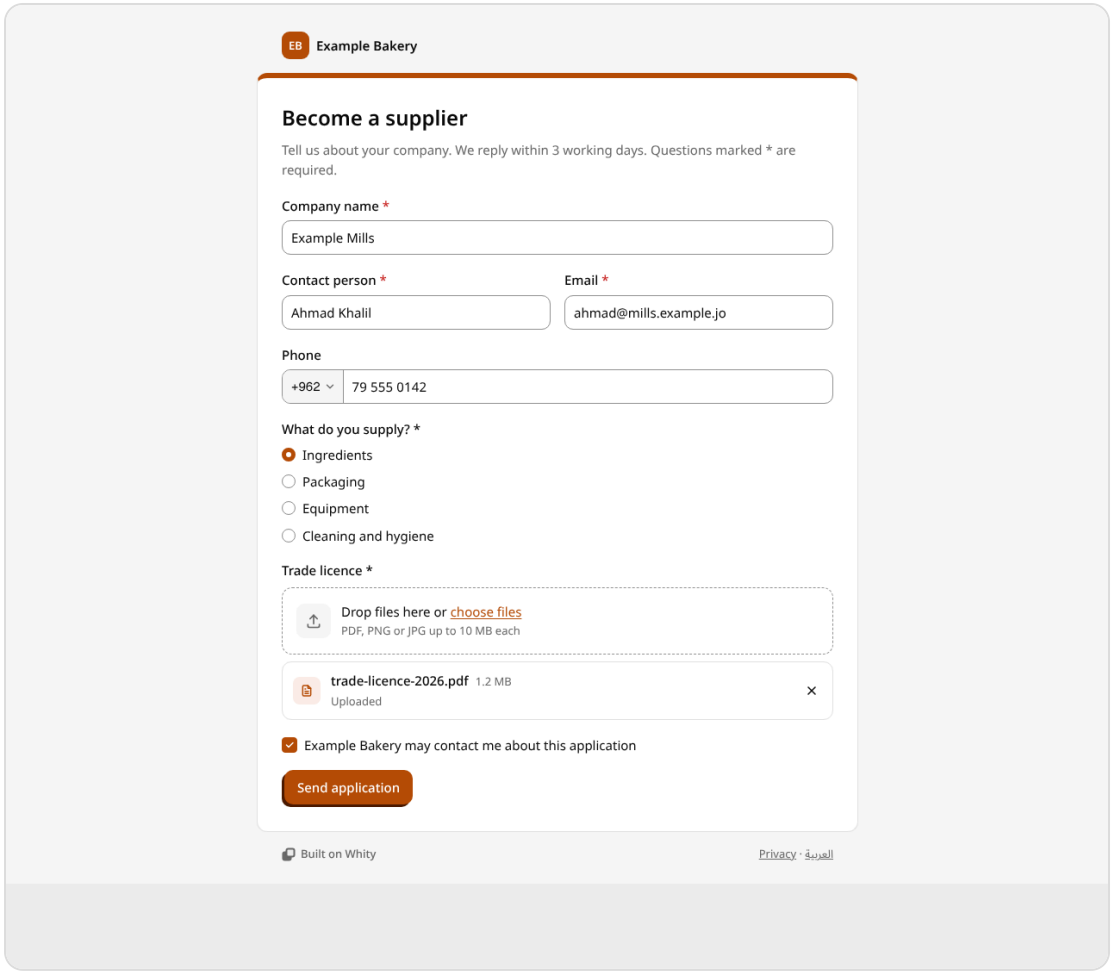

IN USE

Responses (dark)

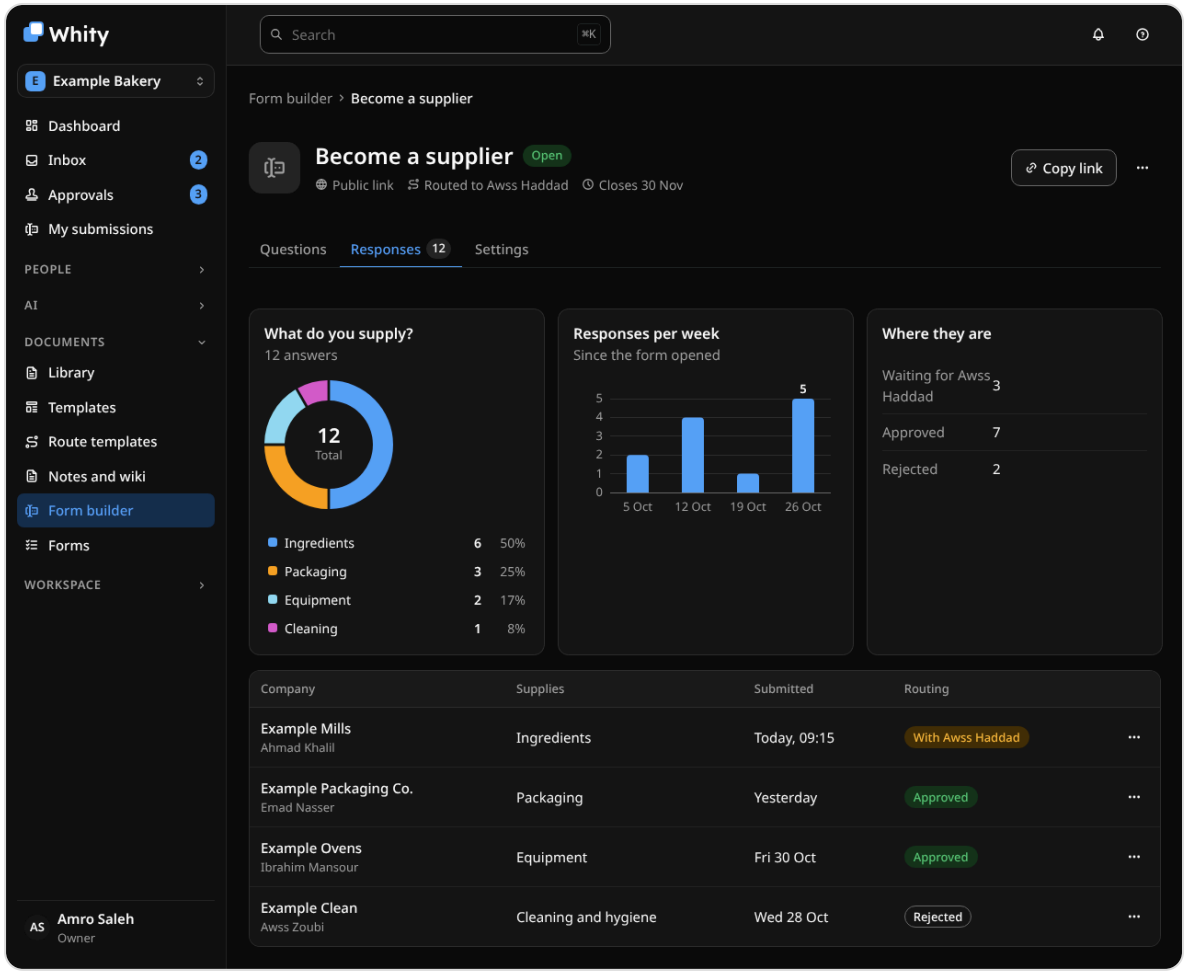

SECTION 23

Documents and routing

Version 2.7: the library, a document's page, templates, notes and wiki, route templates and the flow editor, and routing (decisions D.1–D.4). Cards: "Templates · Documents and routing". Library, Templates, Route templates and Notes and wiki stay separate sidebar items (D.1).

Library

Issued documents, browsed through a rail of saved-search folders beside a list or grid (D.4): All documents, Created by me, Waiting for me, Approved by me, From my unit, Passed through my unit, then Starred and the person's own collections. The current folder is tinted, with its count. A search, Template and Unit filters and List or Grid sit above the table. Filing only adds; nothing is moved or deleted from the library.

A document's page

Every issued document has a record page (D.3) with four tabs: **Document** (the rendered PDF with its key facts and versions), **Routing** (where it is and what you can do), **History** (in sentences) and **Verification** (the QR code, scans, and new or withdrawn codes). Download PDF and Print are visible buttons in the header; Withdraw this document is in ⋯ and asks first.

Routing

The Routing tab replaces the separate Circulation page; its old address redirects here. Each route a document is on shows its stages top to bottom: done stages green with a check, the current stage in the main colour, the next ones grey, each with the people it reached (names, never ids), the rule and the time. When the document waits for you, **Your decision** sits beside the route: an optional note everyone on the route sees, then **Approve**, Reject, Return to the sender and Forward to someone else, and one sentence saying what happens next.

Templates, notes and wiki

Templates are listed with their kind and record type in words, their status (Draft; Published, version N) and **who can see it** in a sentence. Notes and wiki pages use the same list, with New note and New wiki page both visible. Both open in the document editor (section 18).


Route templates and the flow editor

Each route is described in a sentence ("Branch manager, then the owner over JOD 1,000, then Finance"). The flow editor draws it top to bottom (D.2): a start pill, stages as cards (who it reaches, decision or sent only, the rule, conditions), branches side by side under a decision with Approved and Rejected on their arrows, and end pills. The selected stage's settings are in an inspector beside it: name, who it goes to (with how many people it reaches today), what they do, what counts as approved, and Only when. Rename and **Save route** are in the header.

The 2.7 Arabic card is the routing tab (`TplDocRoutingAr`).


IN USE

The library

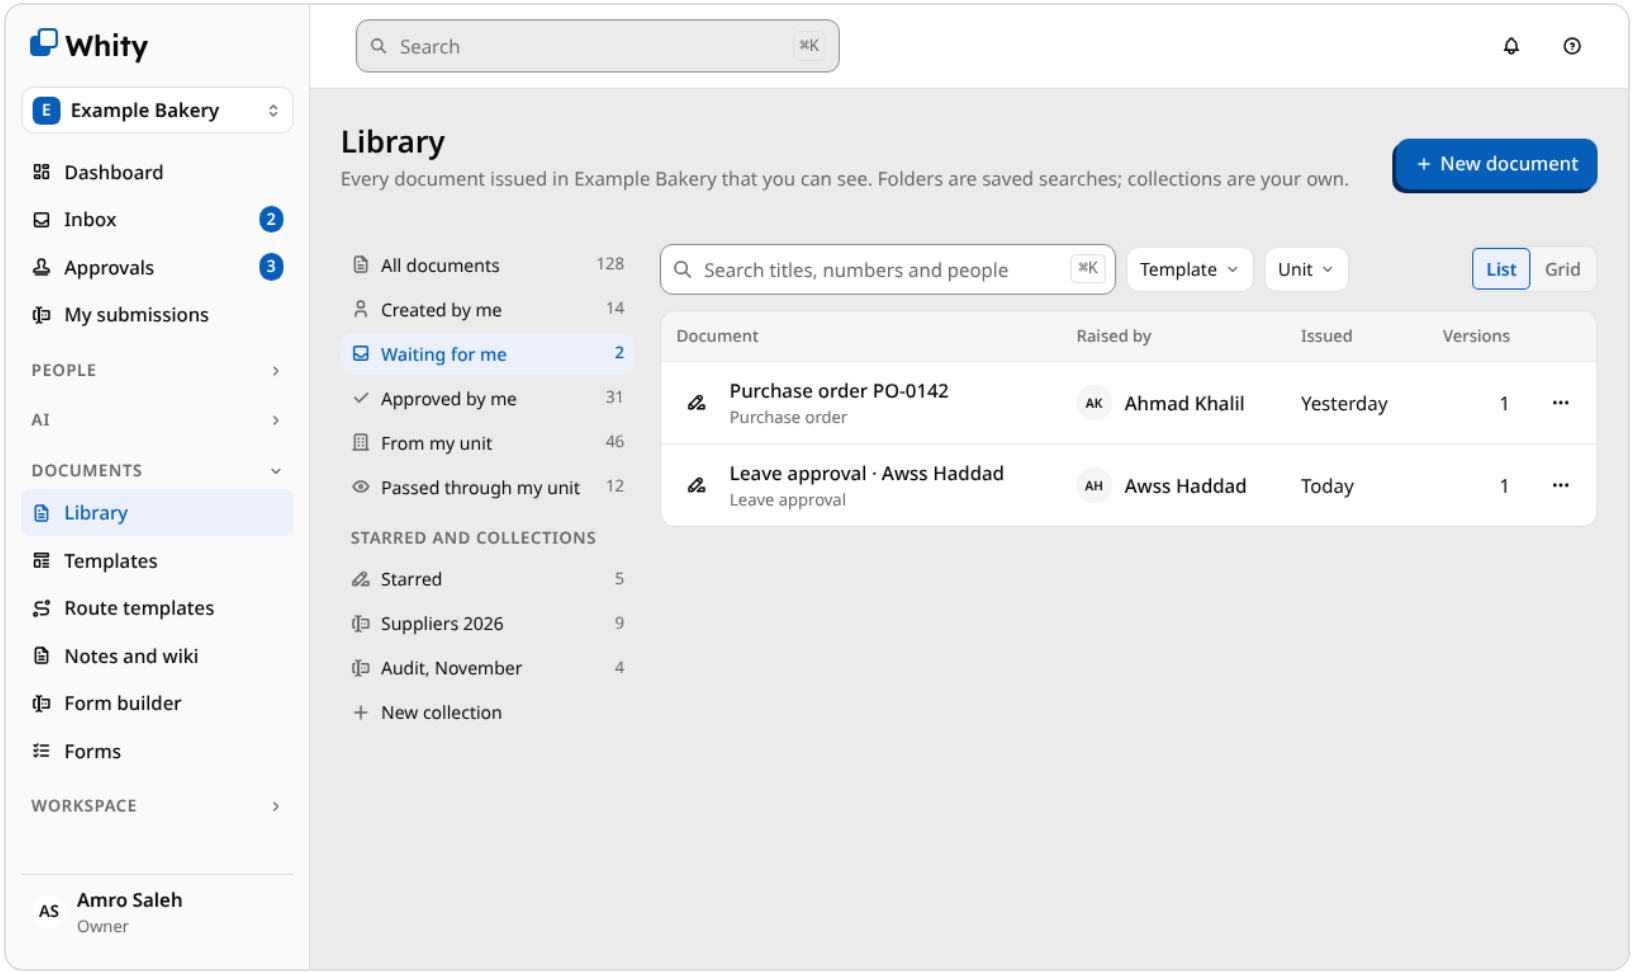


IN USE

A document’s page

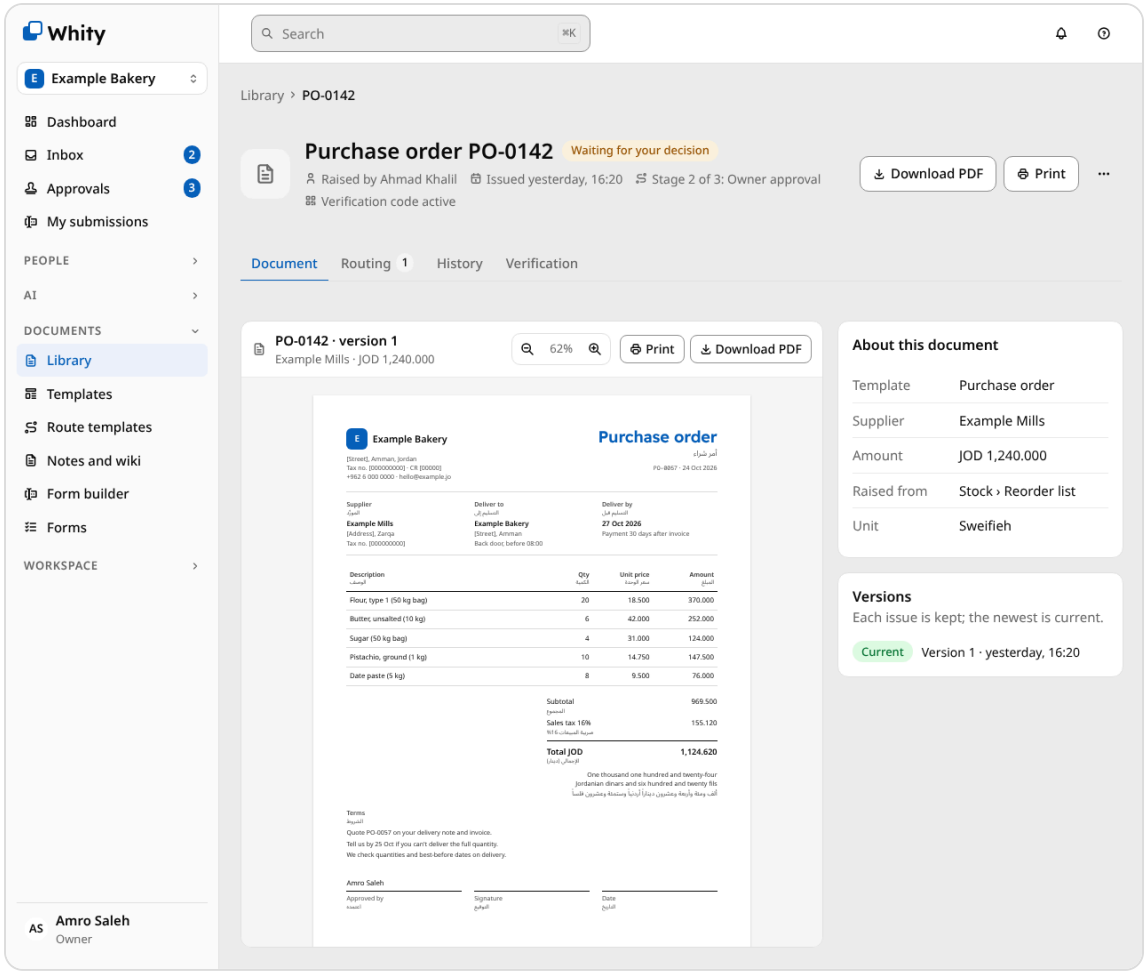


IN USE

Routing and your decision

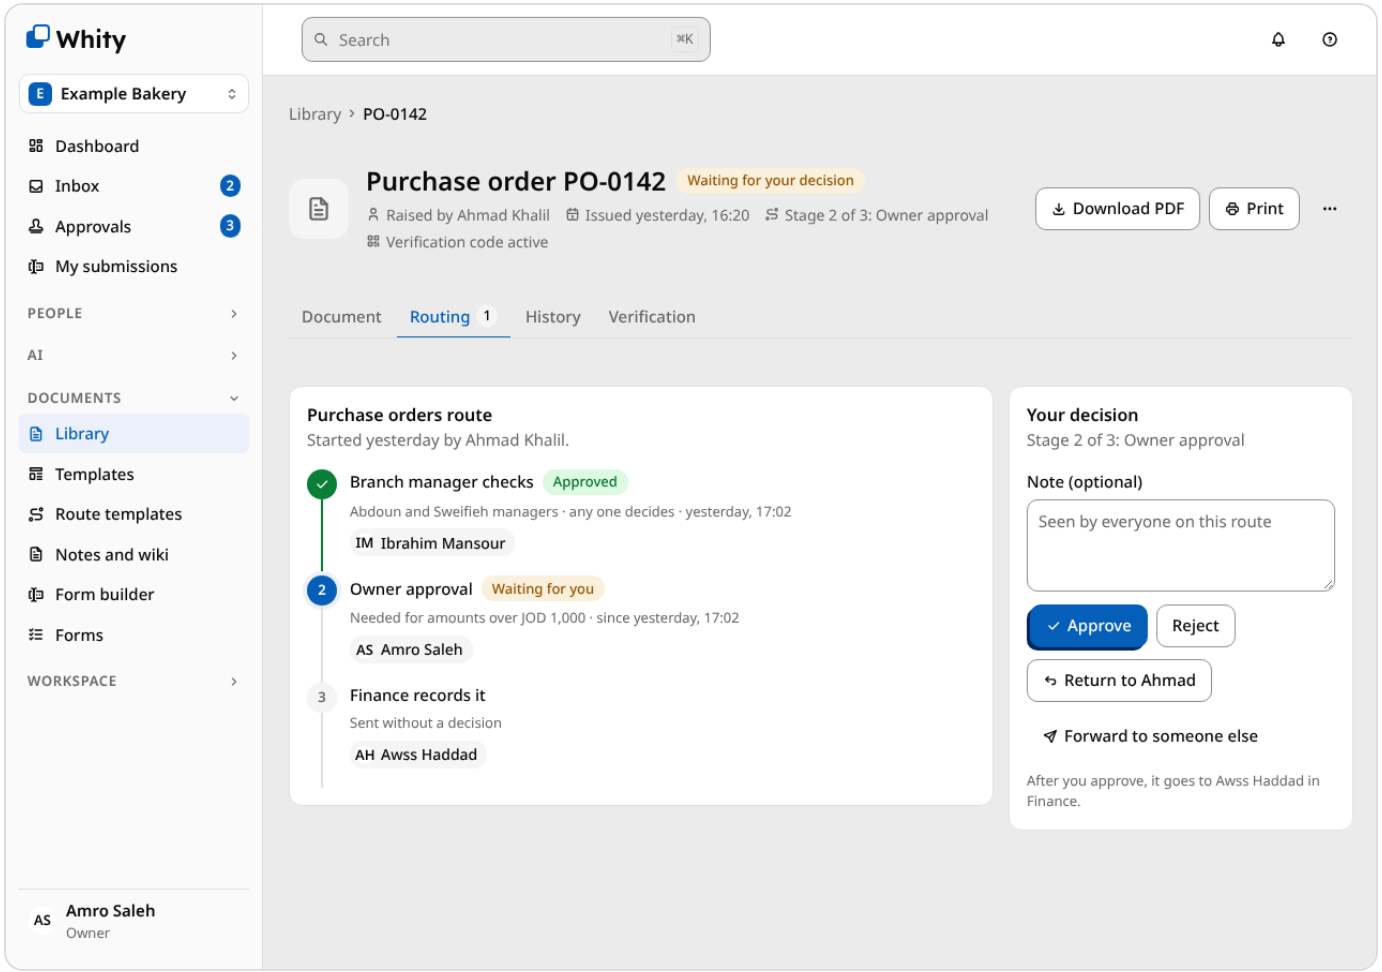


IN USE

Routing in Arabic

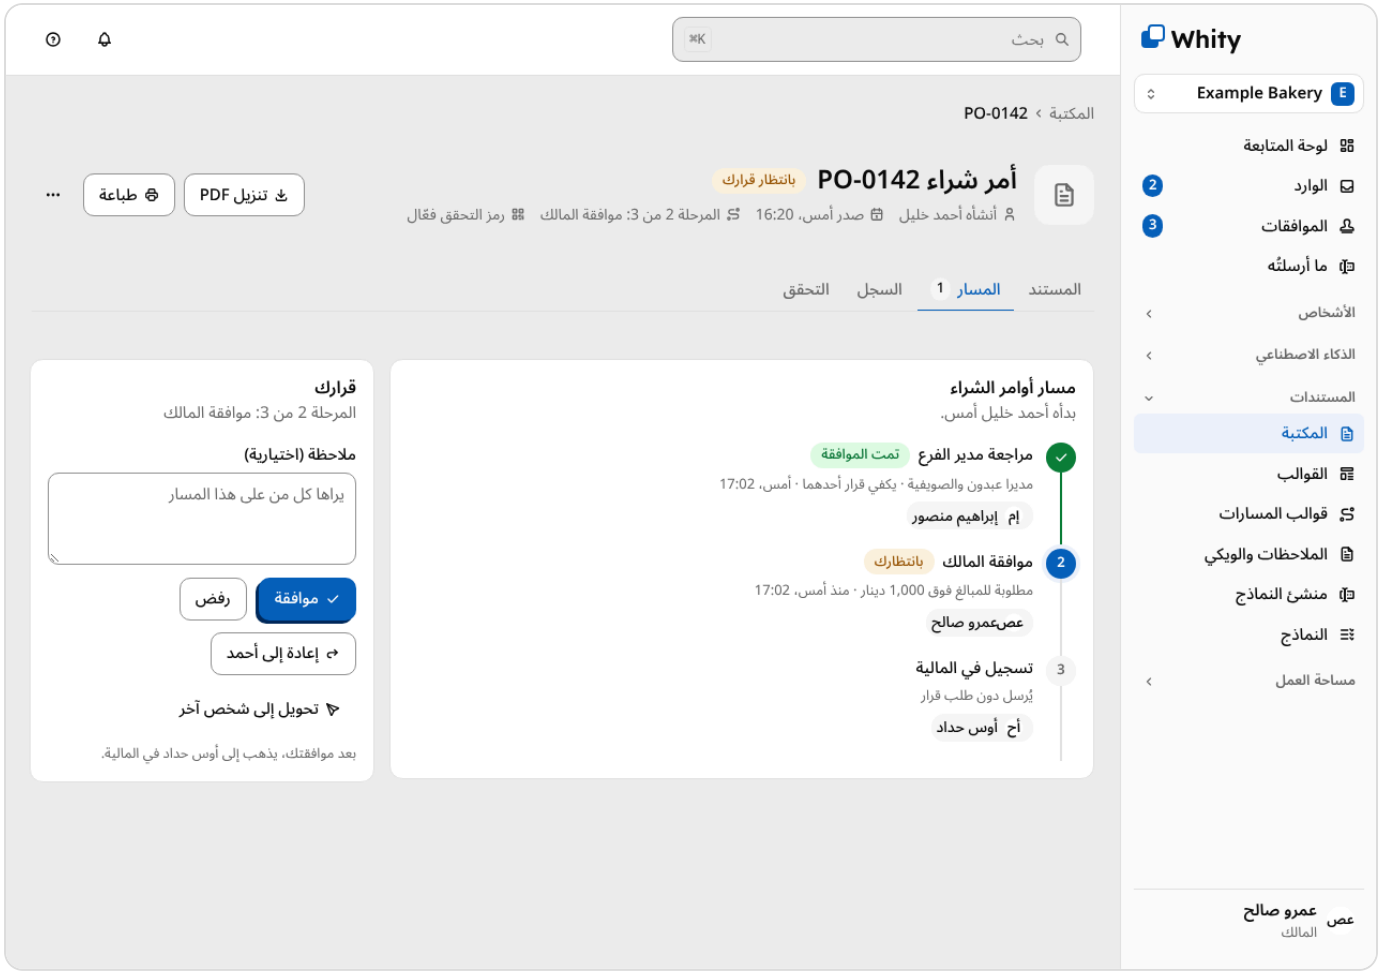

IN USE

The route flow editor

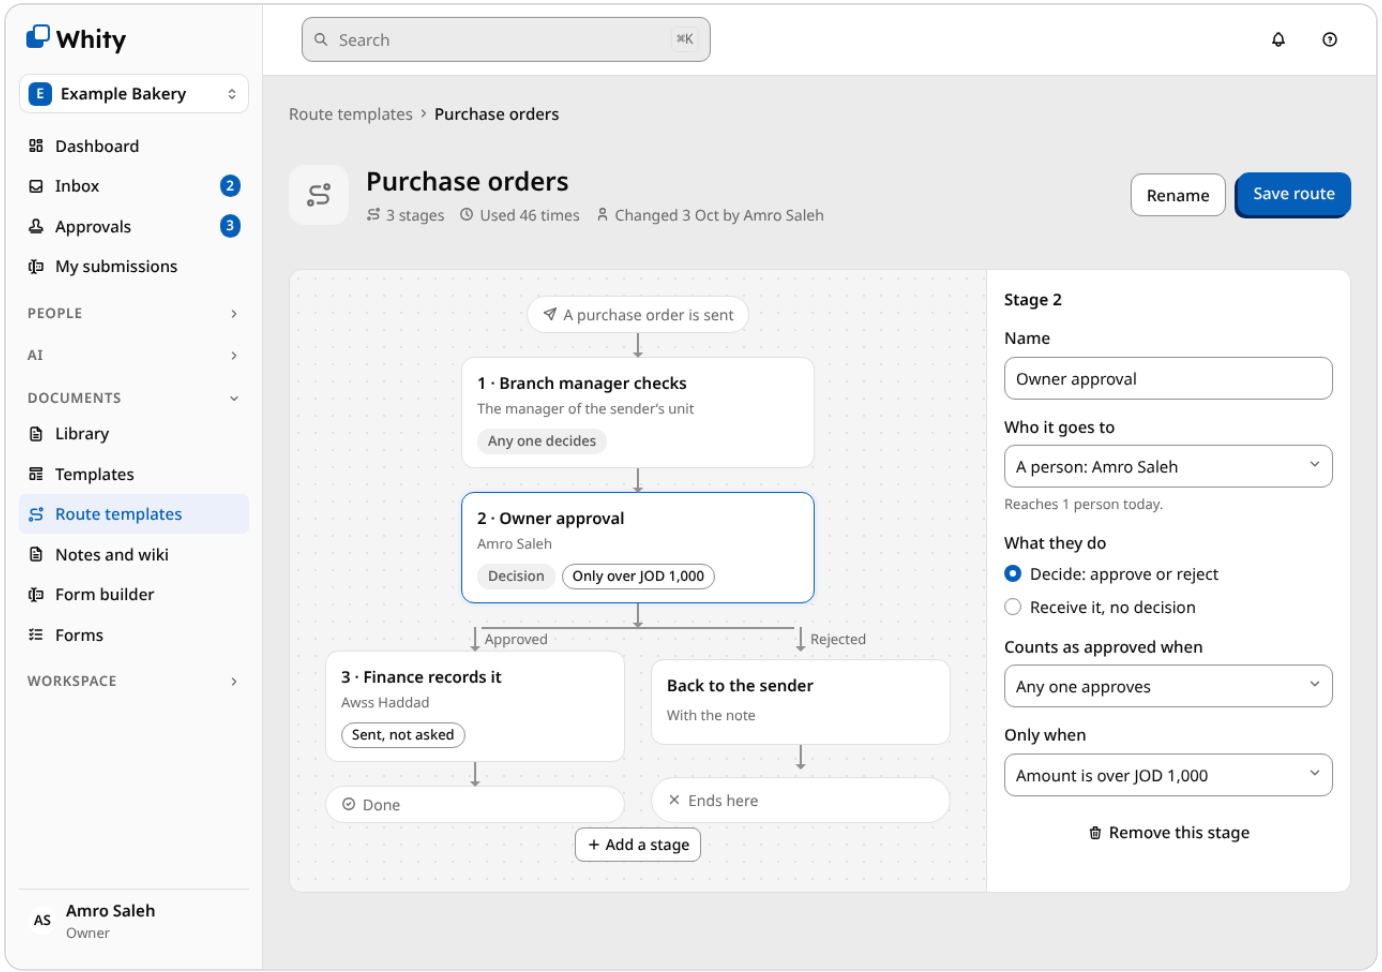

SECTION 24

AI and agents

Version 2.8: Whity's own agents, outside AI apps connected to Whity, and what AI can do (decisions AI.1–AI.4). Cards: "Templates · AI and agents". The sidebar's AI group reads **Agents**, **Connected AI apps** and **What AI can do** (AI.1).

Agents

An agent works for one person and never has more access than that person. The Agents page lists My agents and, for admins, Everyone's agents: the agent with its job in a line, who it works for, how much it does on its own (how many actions are Allowed and how many Ask first), when it was last active, and whether it's working or paused.

New agent opens a gallery of ready agents (AI.2): Billing assistant, Stock assistant, HR helper, Document drafter, Customer replies and more, each with what it's for, three things it does and what it needs. Start from blank is the last card. A new agent starts with every action on Ask first.

An agent's page

A record page (AI.3) with tabs:

Tab	What it holds
Overview	What it does (including what it never does), today's activity, how much it does on its own, where it works (apps, channels, languages)
Instructions	Plain-language instructions written as to a new colleague; the pages and templates it may read; tone and language
What it may do	Off, Ask first or Allowed for each action, in plain words; actions the person lacks are shown with the reason
Activity	Everything it did and proposed, with Undo while the window is open

See activity and Pause are visible buttons; Delete agent is in ⋯ and asks first.

Connected AI apps

Outside apps (Claude, ChatGPT, Cursor, VS Code, n8n and others) signed in to Whity, each for one person, with what it may do in words, when it was last used and when it expires. **Connect an AI app** is a three-step wizard: pick the app, choose what it may do (everything I can do asking first for changes, only look things up, or area by area), then follow the app's own setup steps while Whity waits for it to connect.


What AI can do

The former MCP tools page lists every action AI can take in plain words, grouped by area, with how agents may use it (can do it; proposes and a person approves; suggests only; never) and what happens if it goes wrong (how long Undo lasts). Tool names, toolsets, discovery modes and token counts appear only with **Show technical details** (A.4, A.3).

The 2.8 Arabic card is an agent's page (`TplAgentRecordAr`).


IN USE

Agents

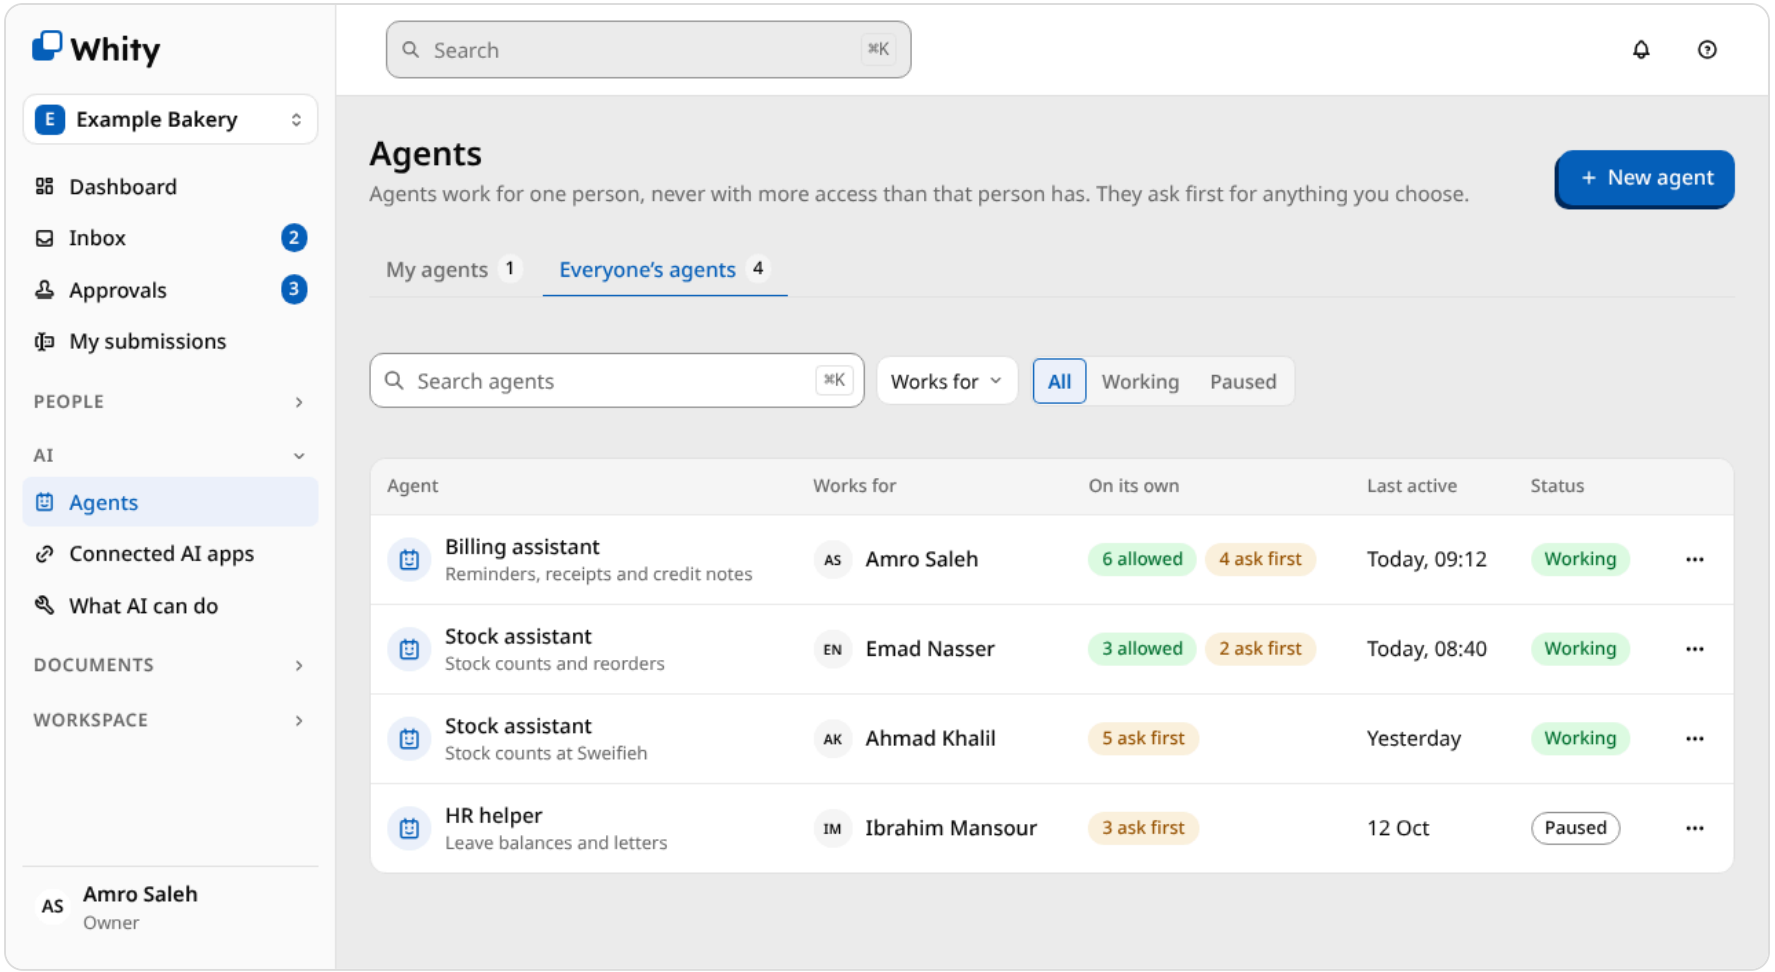


IN USE

Start from a ready agent

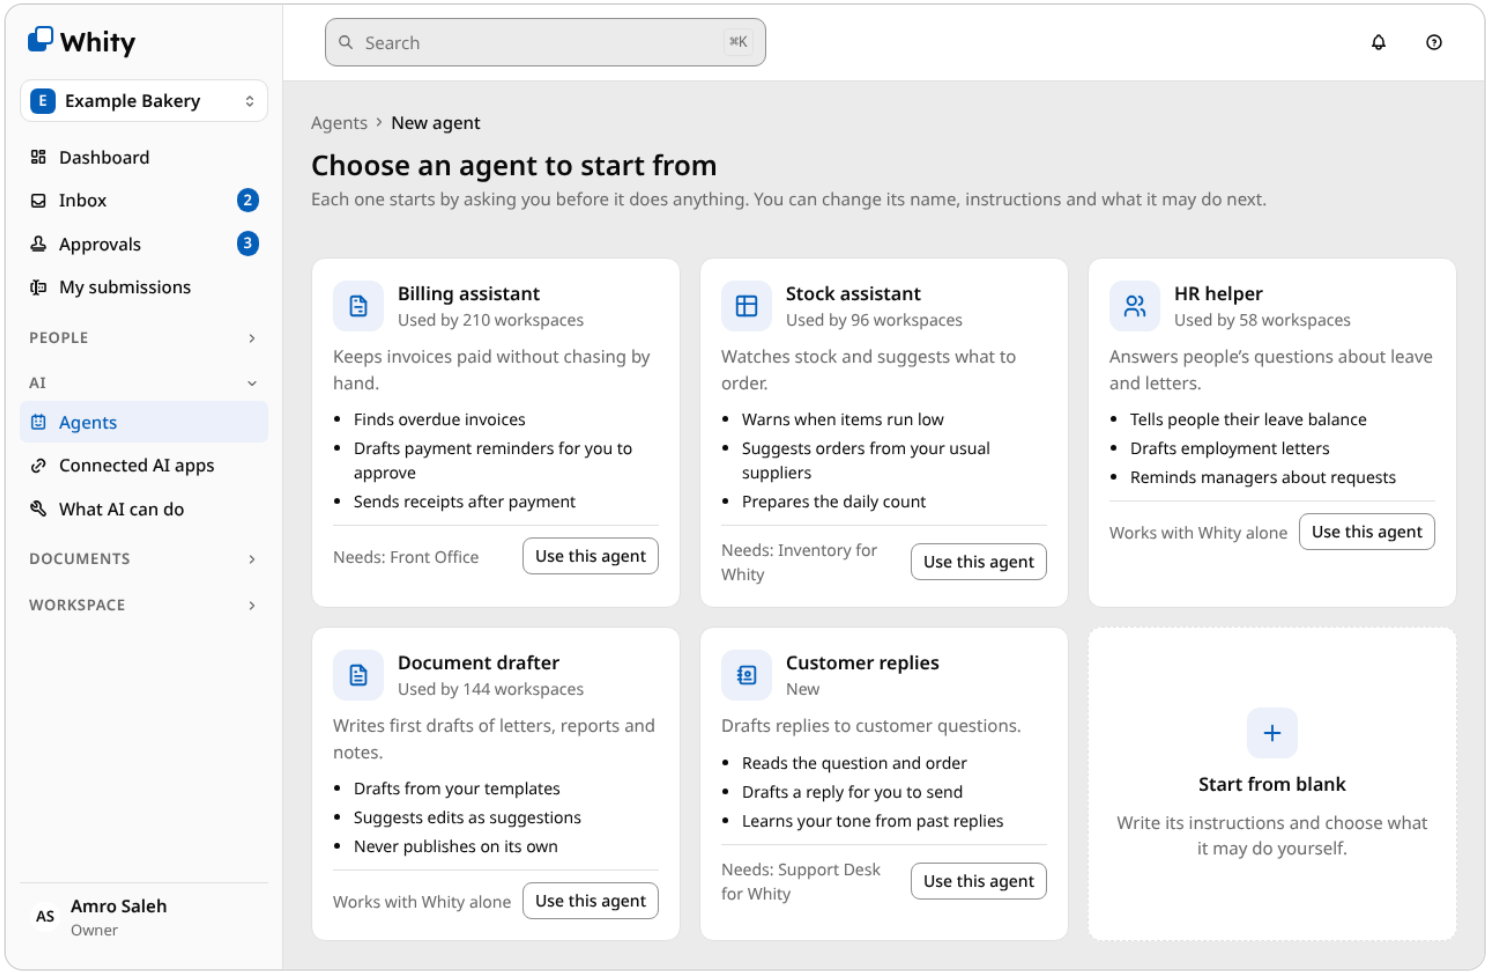


IN USE

An agent’s page

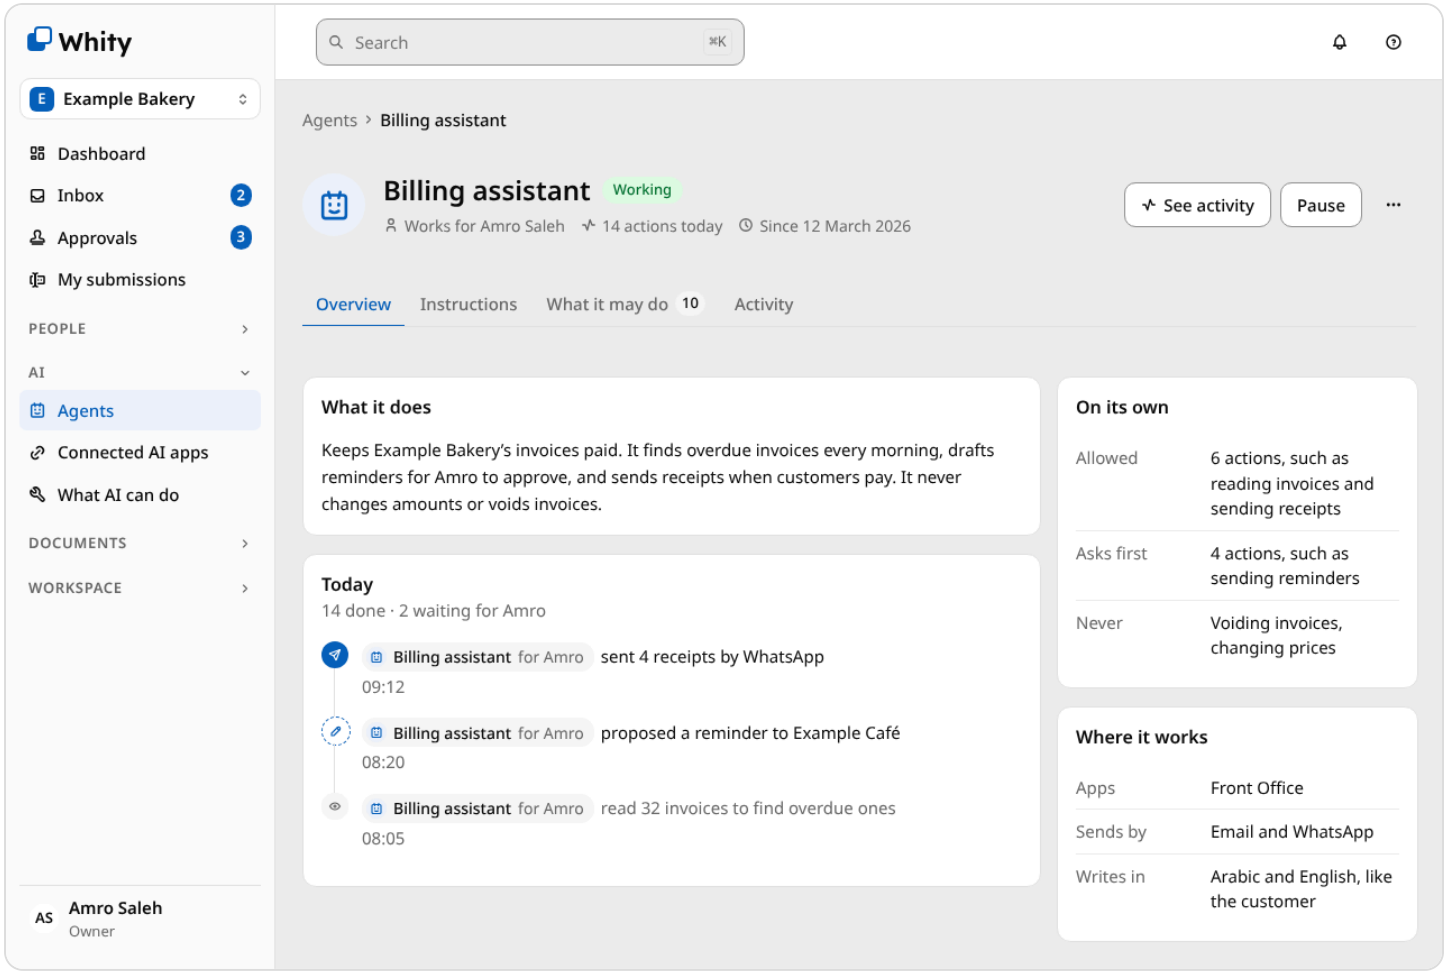


IN USE

An agent’s page in Arabic

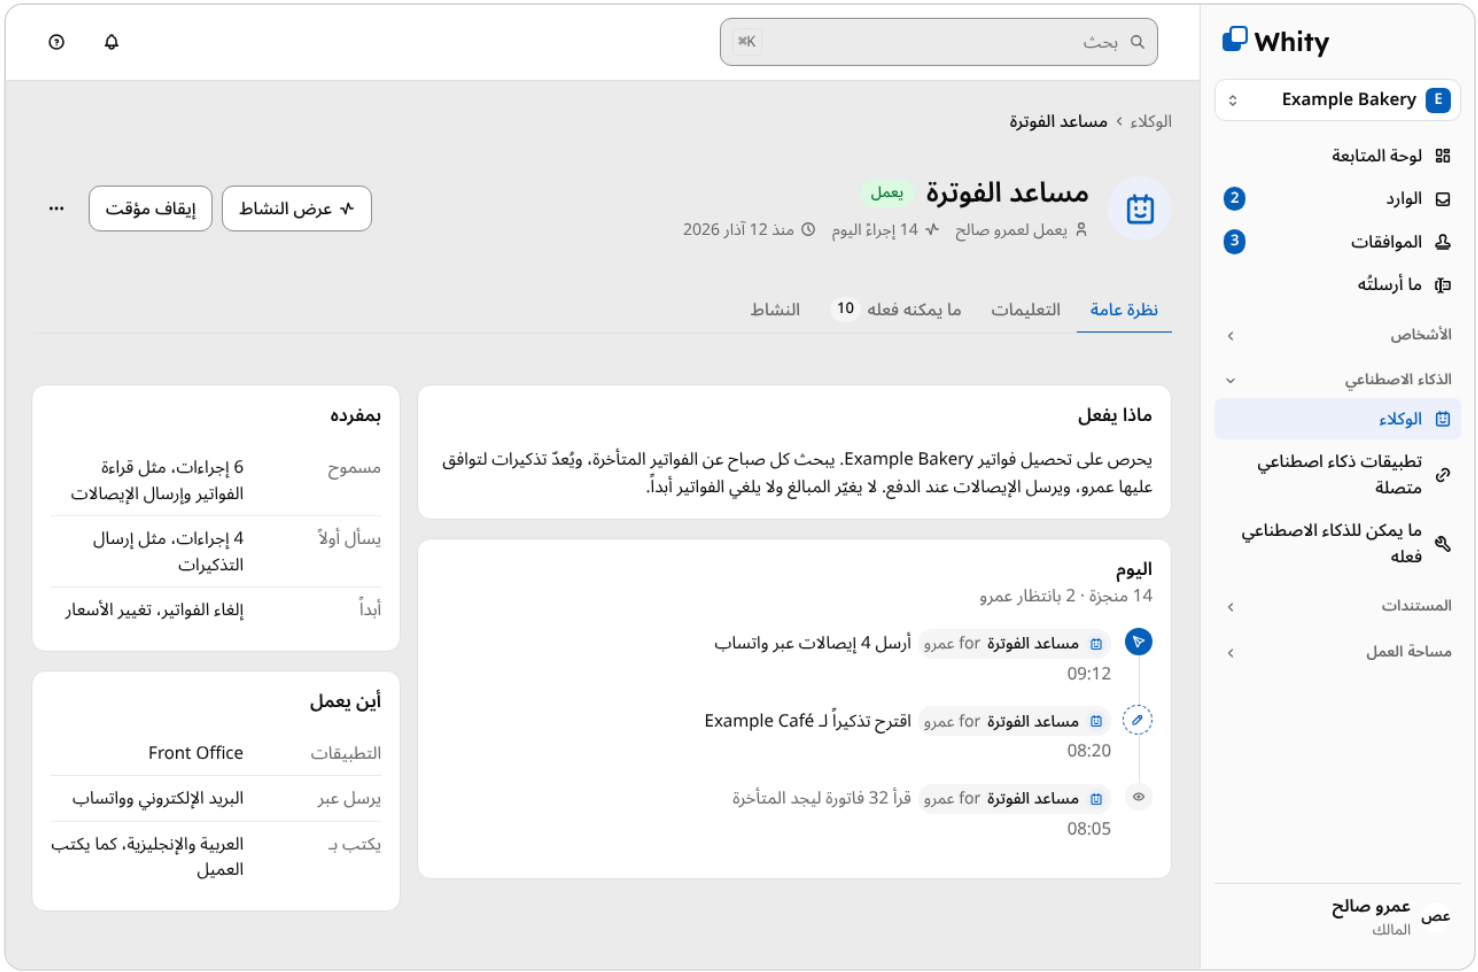


IN USE

Connect an AI app (dark)

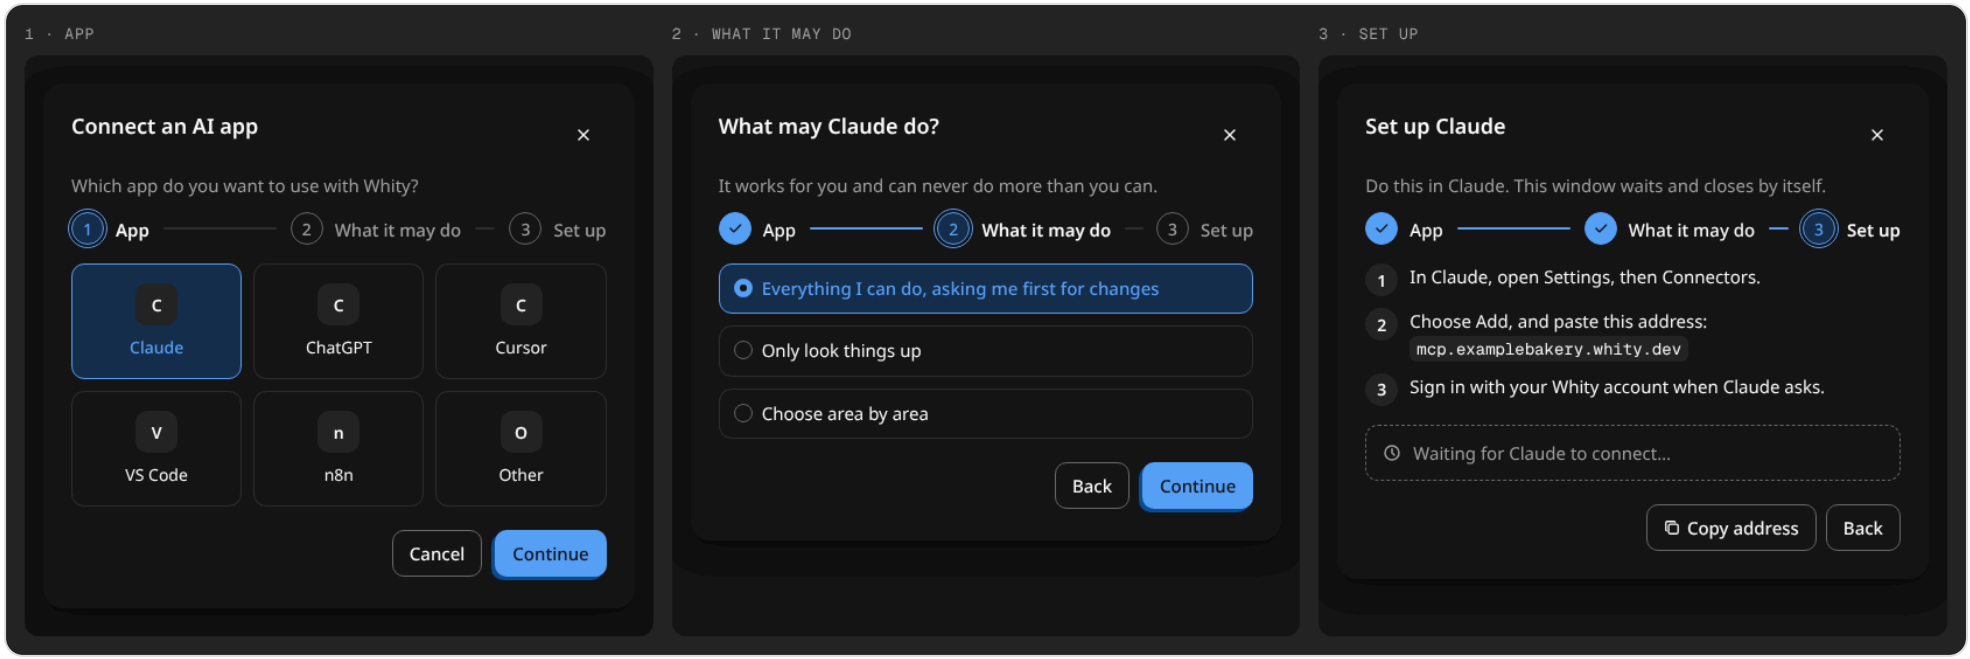


IN USE

What AI can do

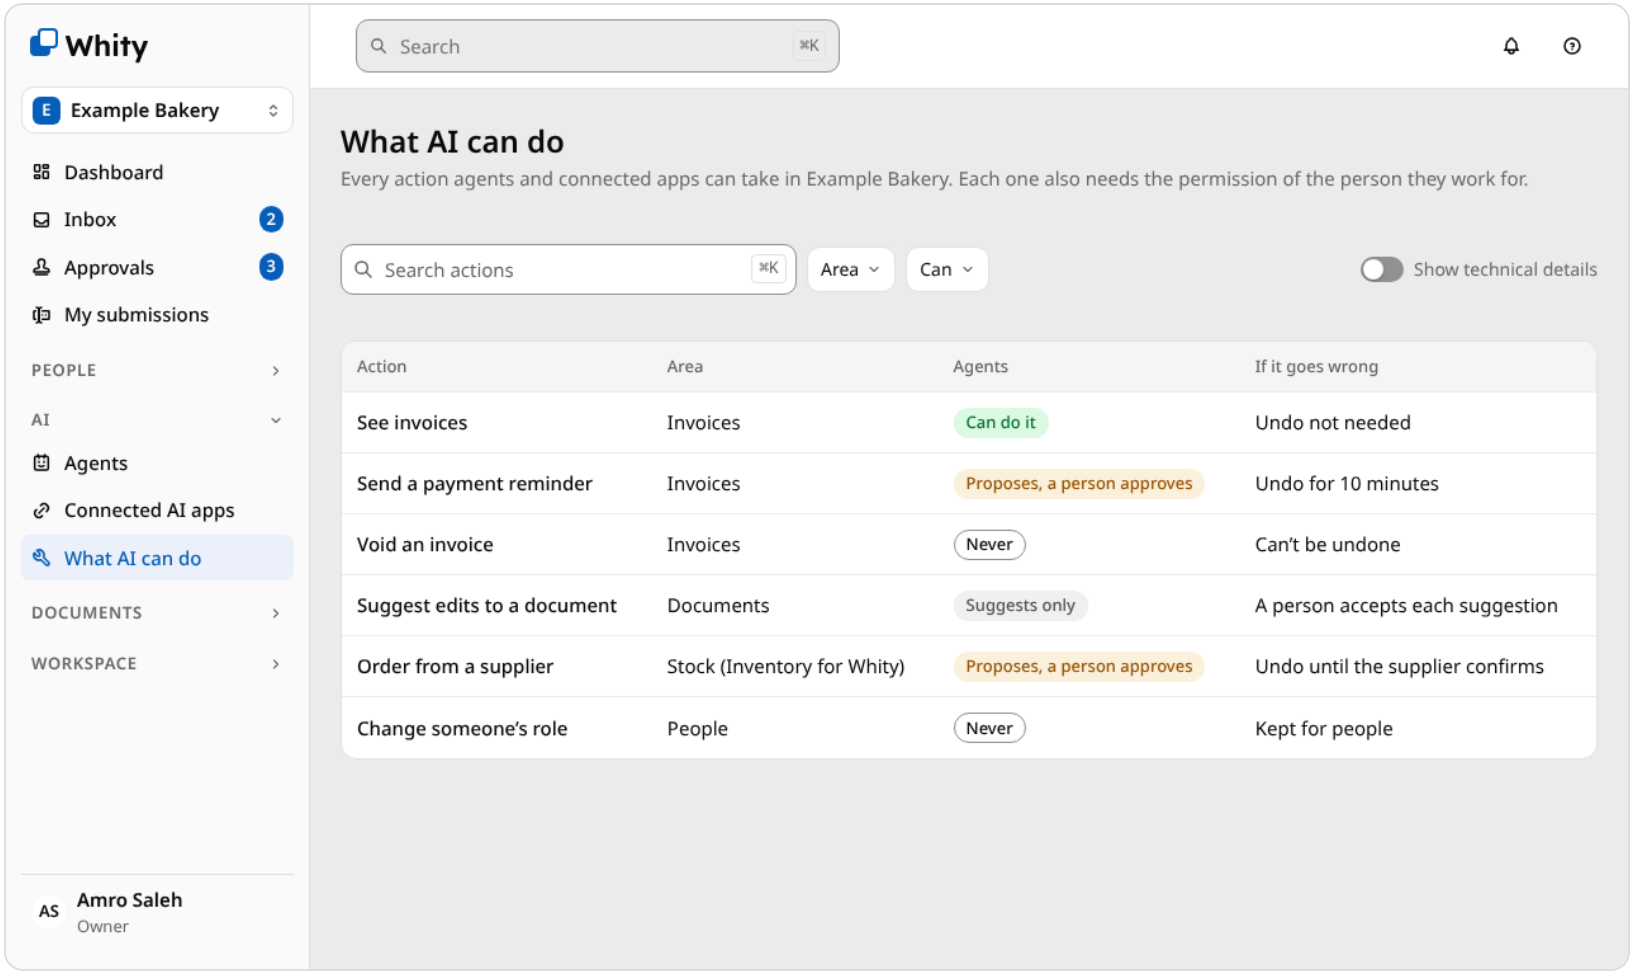

IN USE

An agent’s persona, in English and Arabic side by side

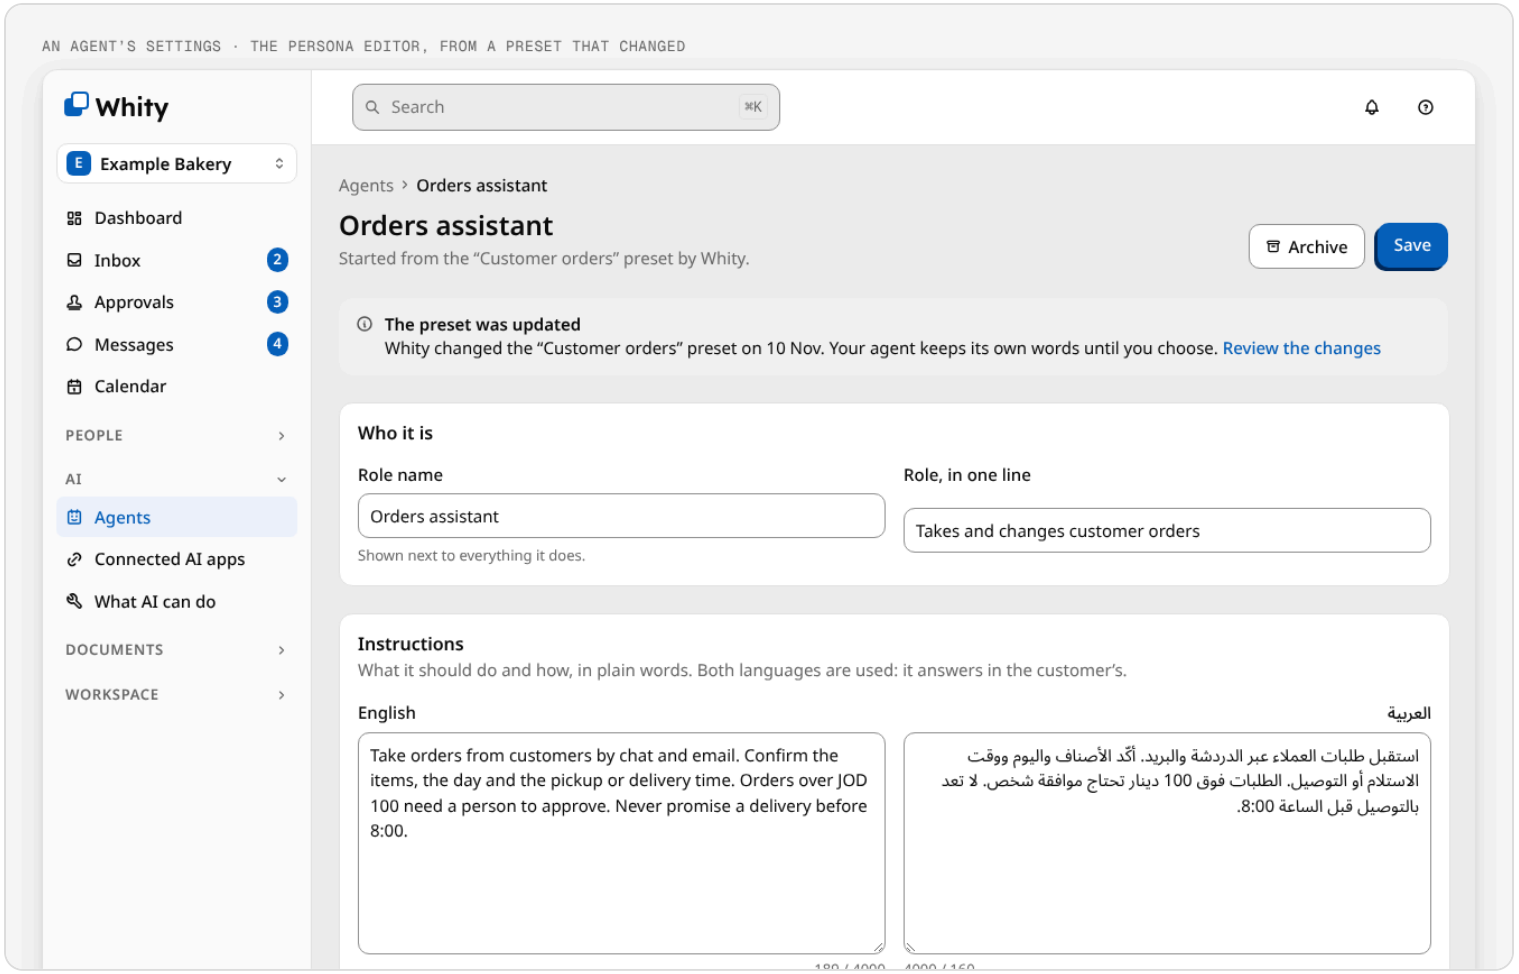

Instructions, tone, tool groups and where a grant starts

SECTION 25

Workspace, billing and settings

Version 2.9: the Settings area, a person's account, billing, the audit log and licensed devices, and the operators' Platform pages (decisions W.1–W.4). Cards: "Templates · Settings", "Templates · Account and billing", "Templates · Platform". With it, every screen in the built app has a design.

Settings

One Settings entry in the sidebar opens a page with a grouped **sub-nav** beside it (W.1): Workspace (General, Branding), Sign-in and security (Security, Single sign-on, Sign-up), Email (Email domains), Data (Tags, Translations), Advanced (Error tracking), and Devices (Licensed devices). Each page keeps its own address and permission check; pages a person can't open aren't listed.

Page	What it holds
General	Workspace name, support email, time zone and language (saying when a value follows the platform default); company details with the tax number tax invoices need
Security	Two-step rules in sentences, with deadlines; who hasn't set it up, with Remind
Single sign-on	A card per provider: how it appears, which domains, On or Off, the address to give it with Copy
Email domains	A card per domain: the DNS record with Copy, the role new people get, Check now
Tags	Tag groups with their tags and where they're used, on one page
Translations	Coverage per language, then wording with what's missing first and Add Arabic
Licensed devices	Serial numbers, names, status; Issue a code shown once

Your account

From the person's name at the foot of the sidebar, in tabs (W.3): **Profile**, **Sign-in and security** (password, two-step, recovery codes, each a visible button), **Sessions and devices**, and **Preferences**: language, theme, **text size** (Standard 15px or Larger 17px) and **Show technical details**.

Billing

The plan and what's billed with it, the next payment with **Pay now**, and Whity's invoices to the workspace. Amounts are JOD with 3 decimals; plan names and prices stay `[plan name]` and `[price]` in designs.

Audit log

What happened, in sentences grouped by day (W.4): people in bold, agents as actor chips "for" their person, a muted line with how, and Open for anything still waiting. Filters for who, agent, area and date; Export. Codes, ids and IP addresses appear only with Show technical details.


Platform (operators)

A **Platform** sidebar group, shown only to the system tenant (W.2): Tenants (workspaces, with server-side search), Plans and pricing (plans as cards; prices typed as money, never minor units), Promotions (in JOD by default), System (the former statistics page, refreshing every minute), Errors (in plain words first; the stack trace on request), Notification delivery (whether mail and messages get through), and Platform settings (install-wide switches in sentences, with Email, File storage, Languages and Error tracking tabs).

The 2.9 Arabic card is billing (`TplBillingAr`).


IN USE

Settings: the sub-nav and General

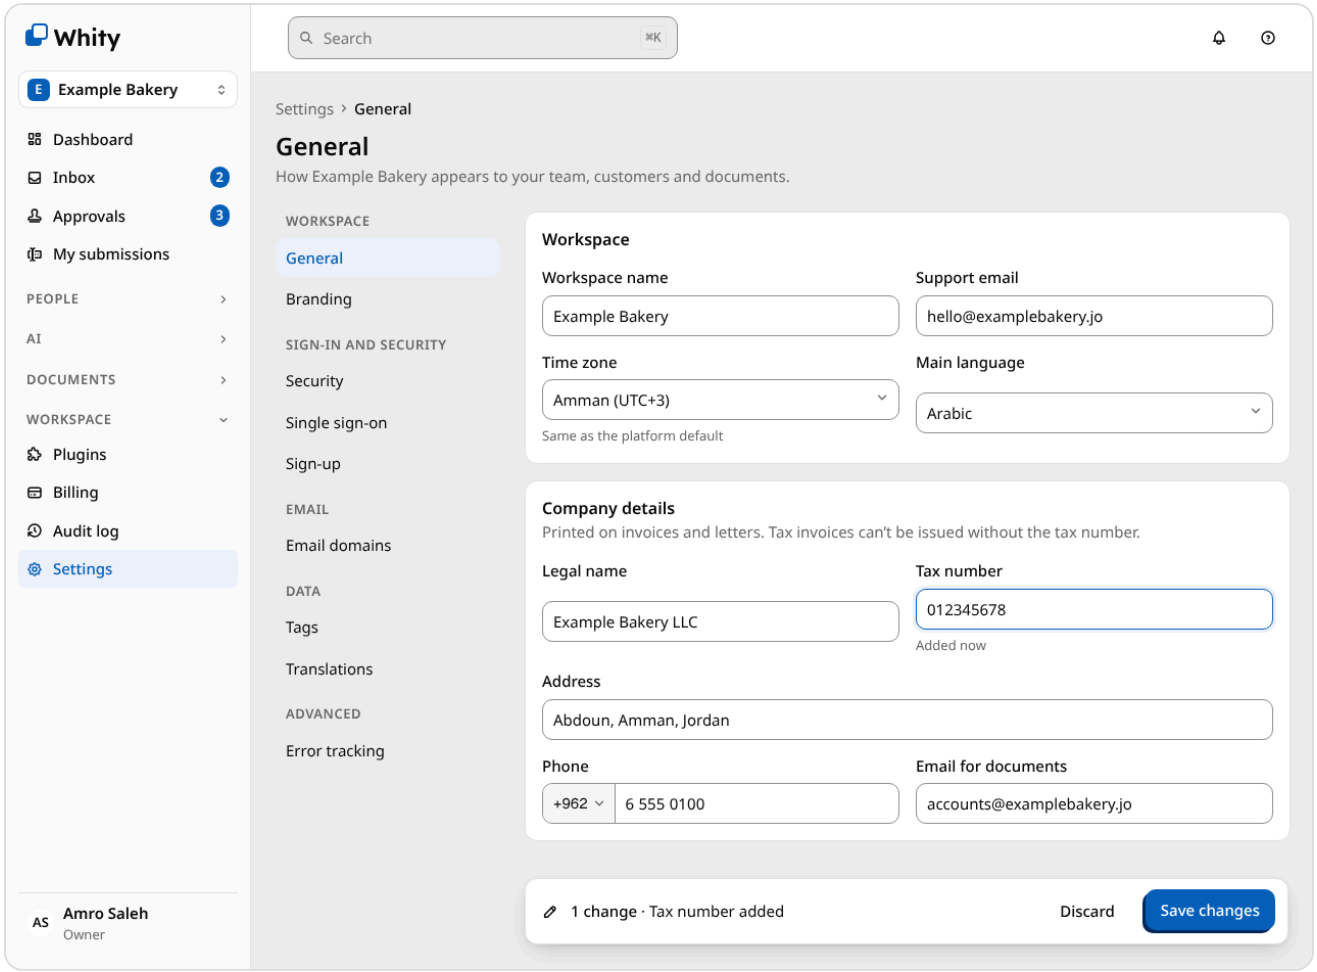


IN USE

Your account: preferences and text size

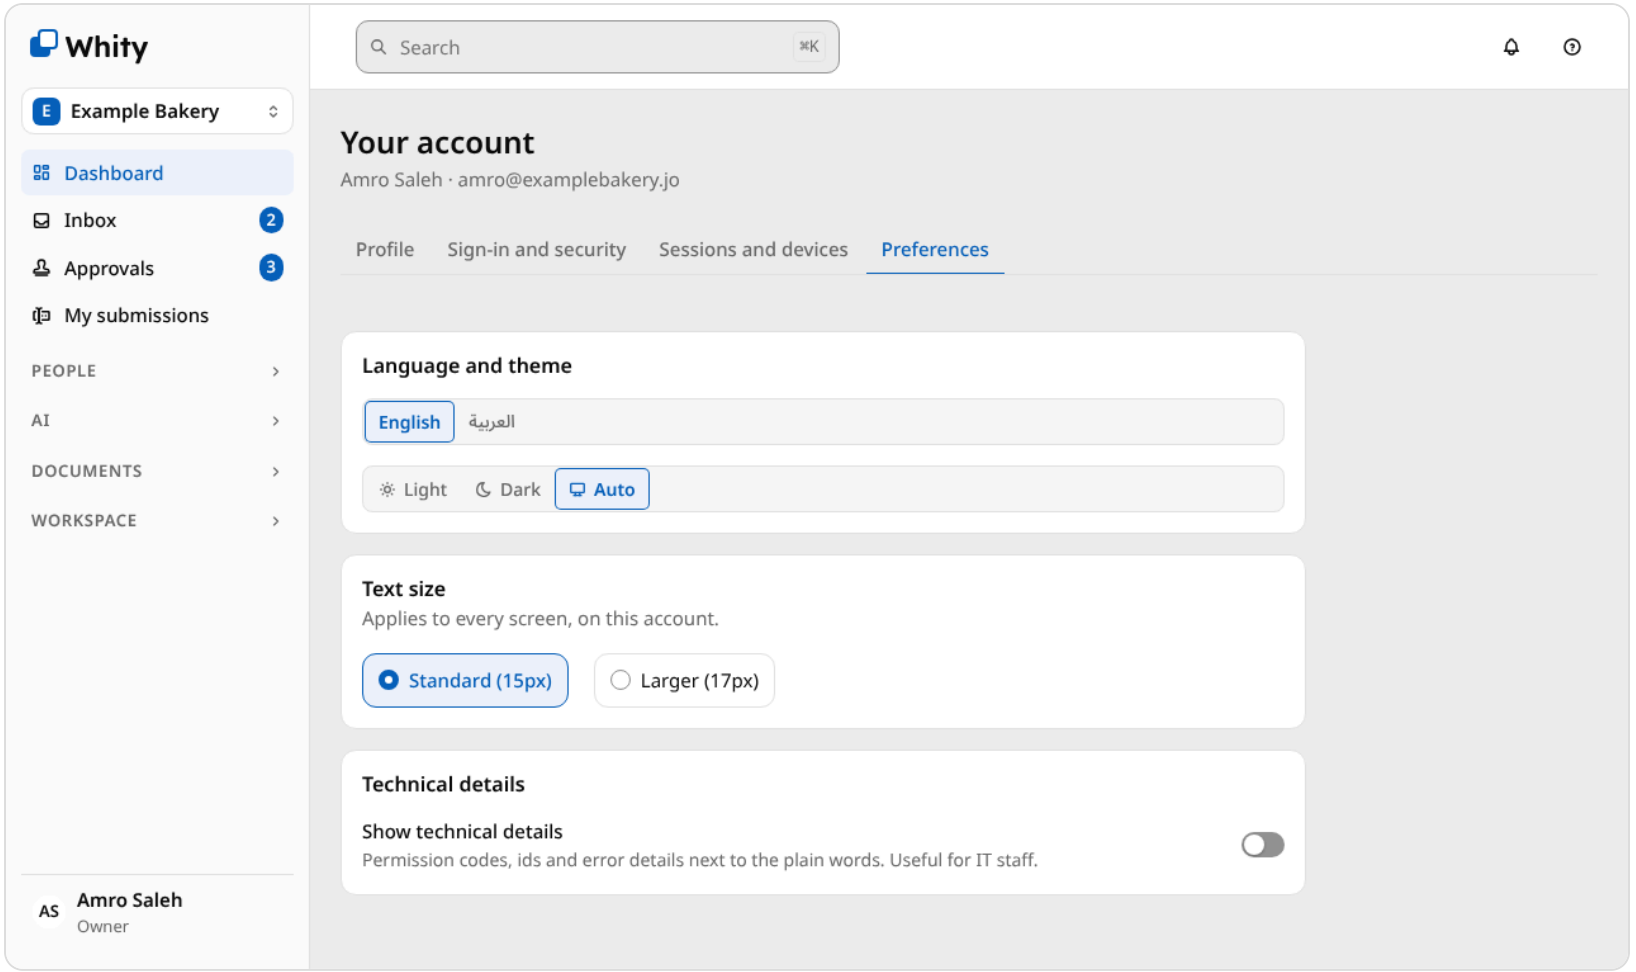


IN USE

Billing

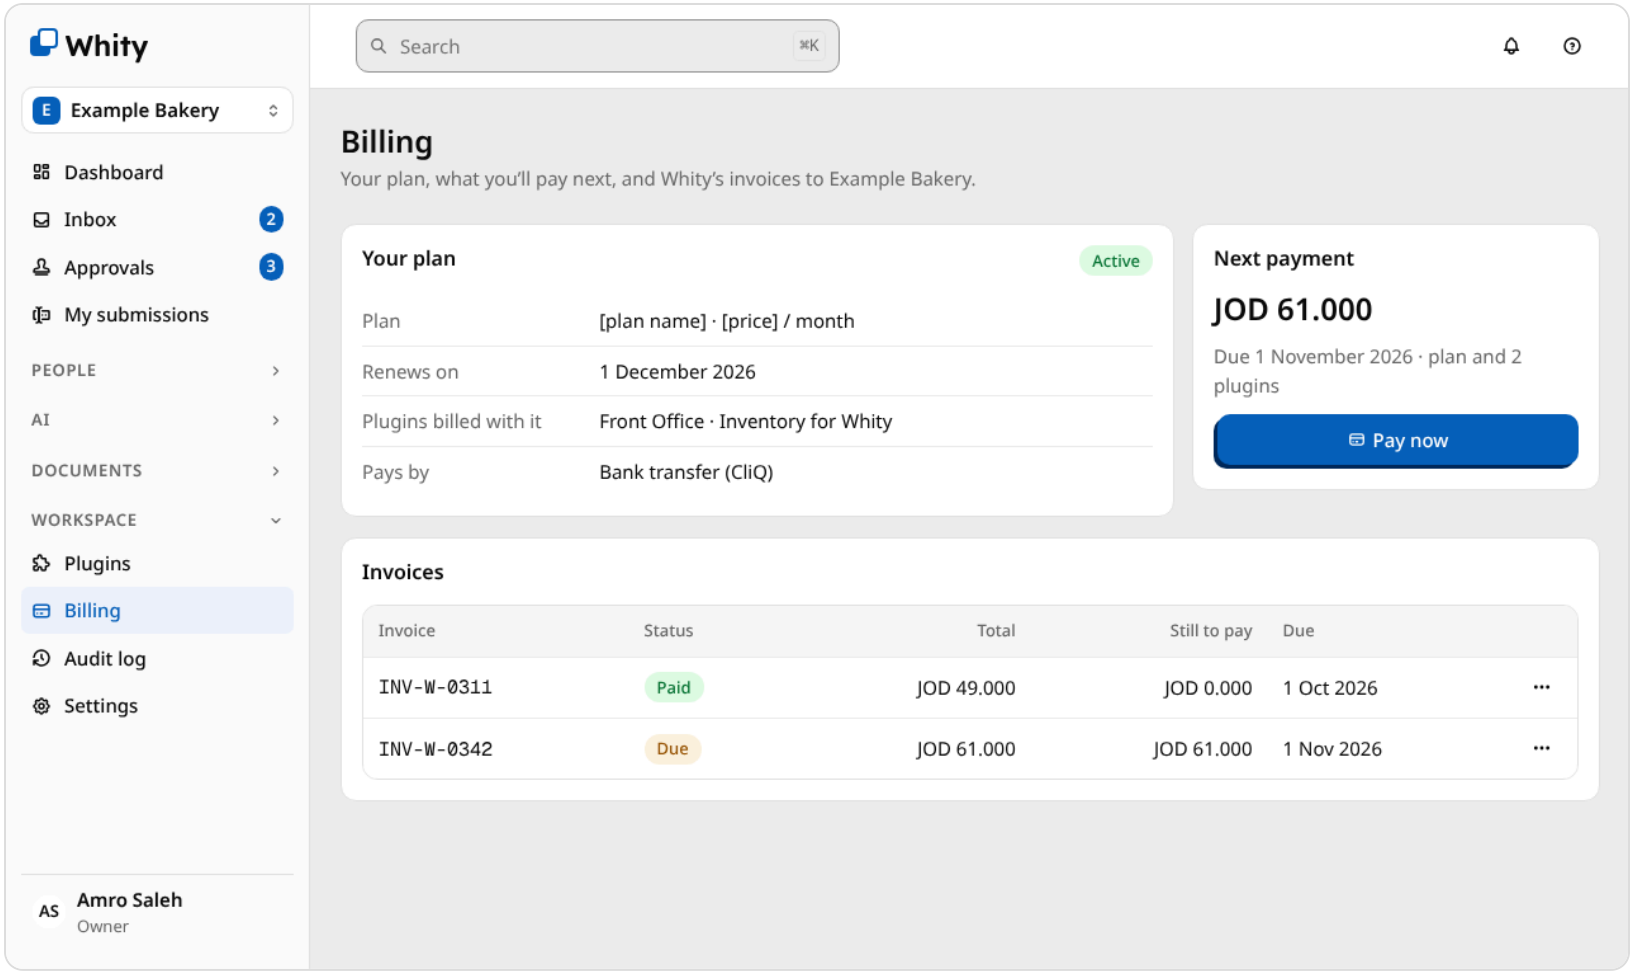


IN USE

Billing in Arabic

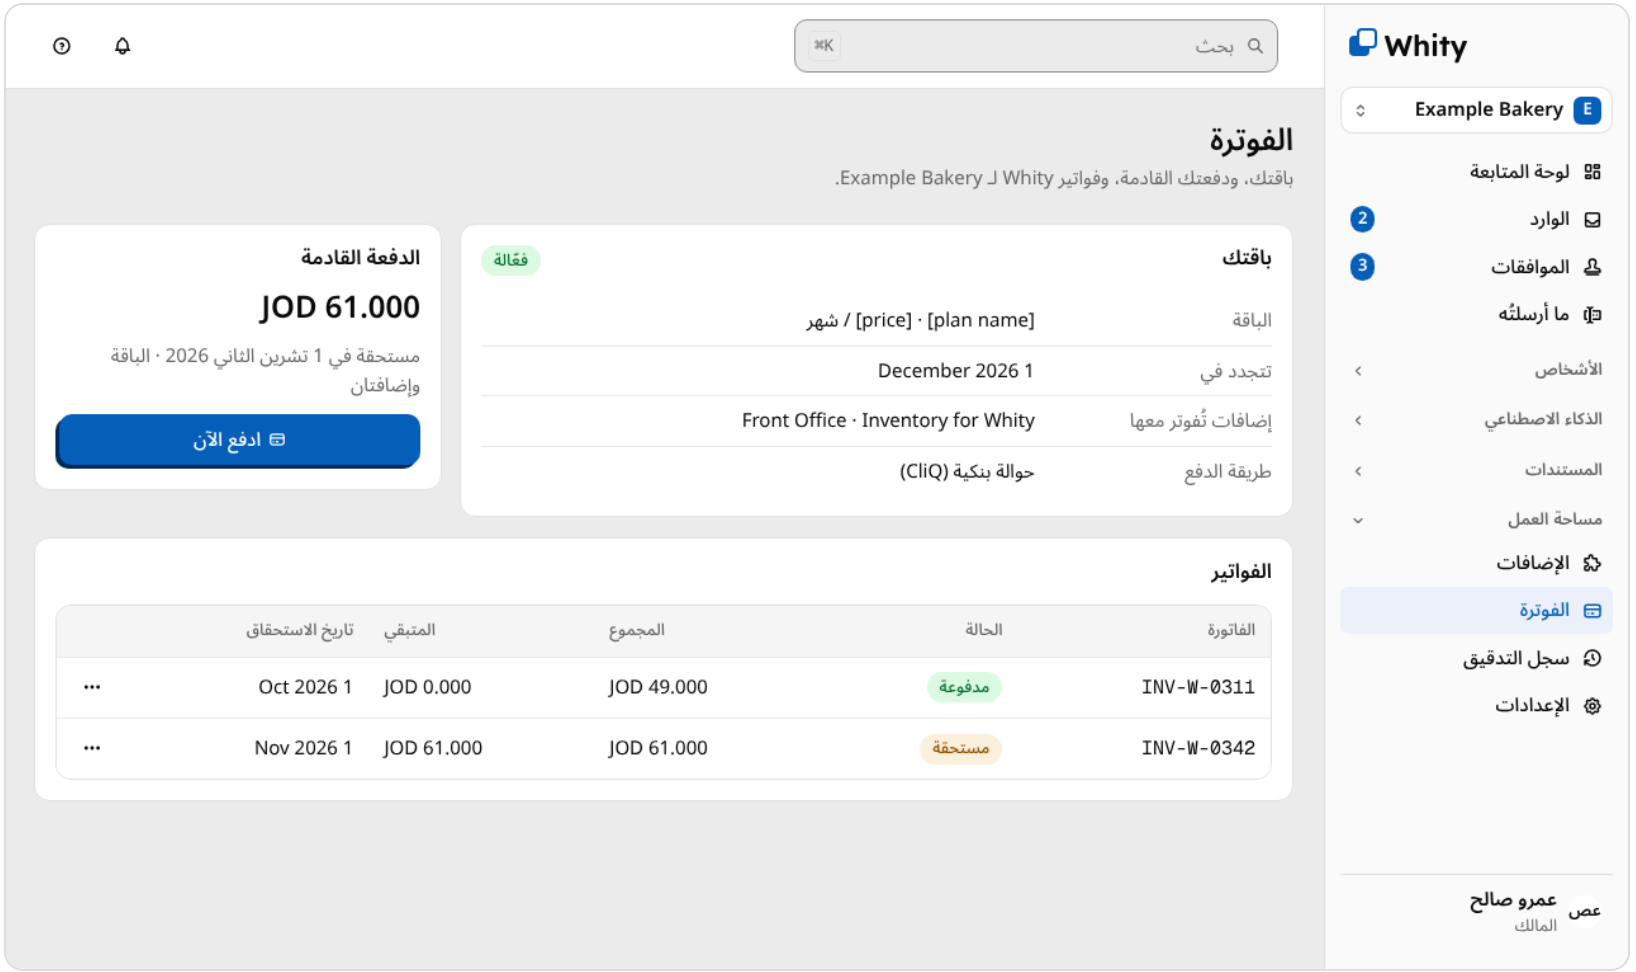


IN USE

The audit log in sentences

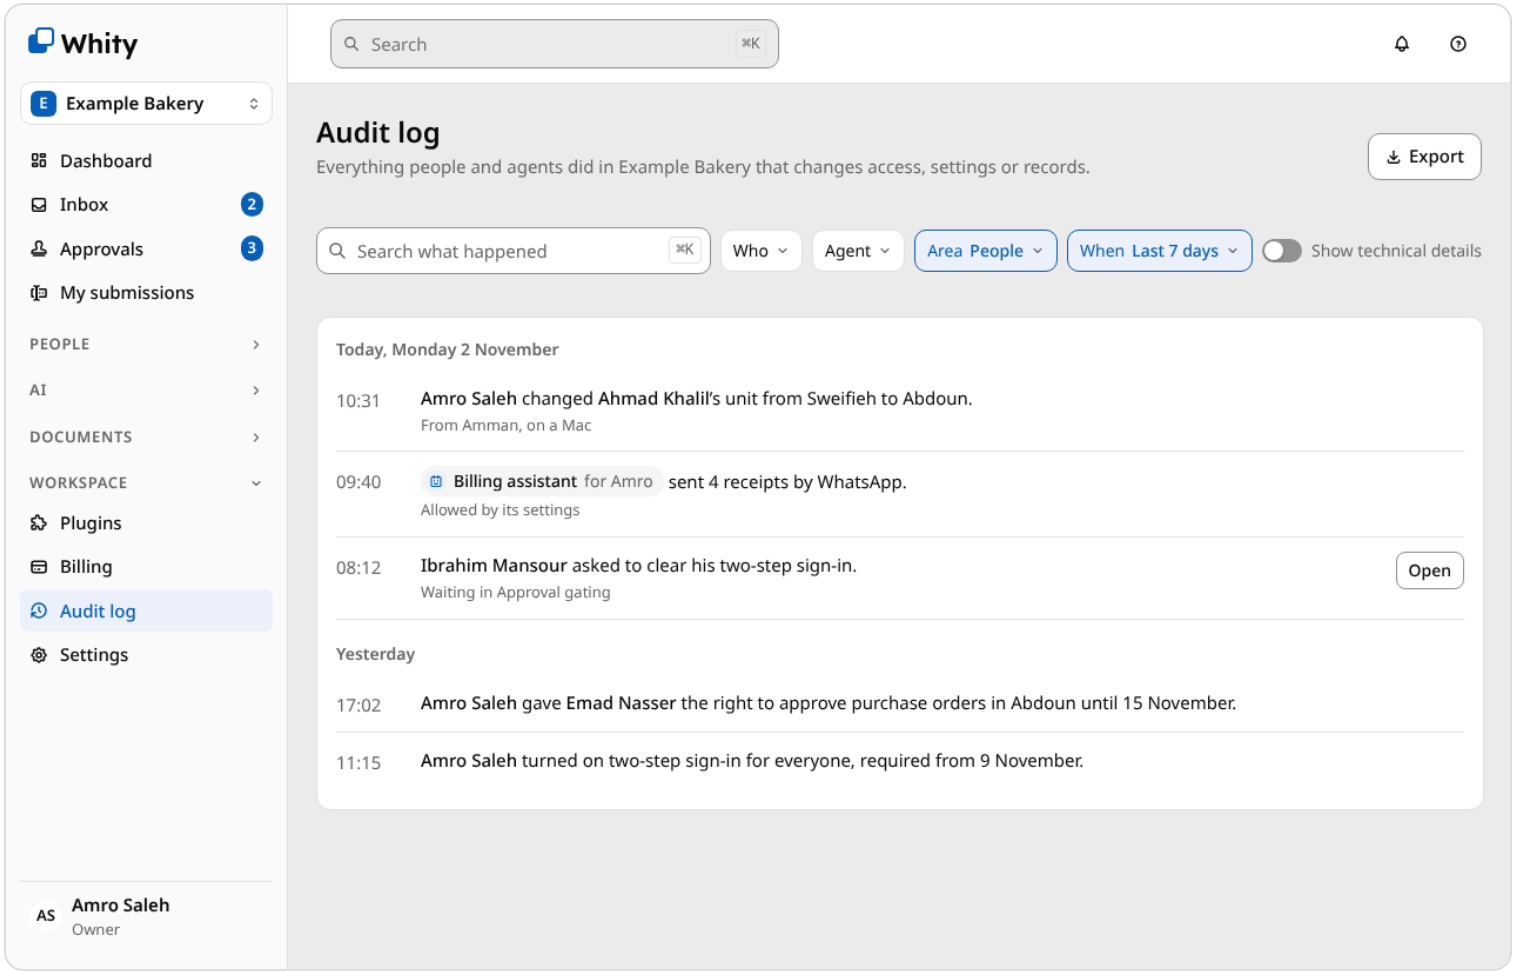

IN USE

Platform settings for operators (dark)

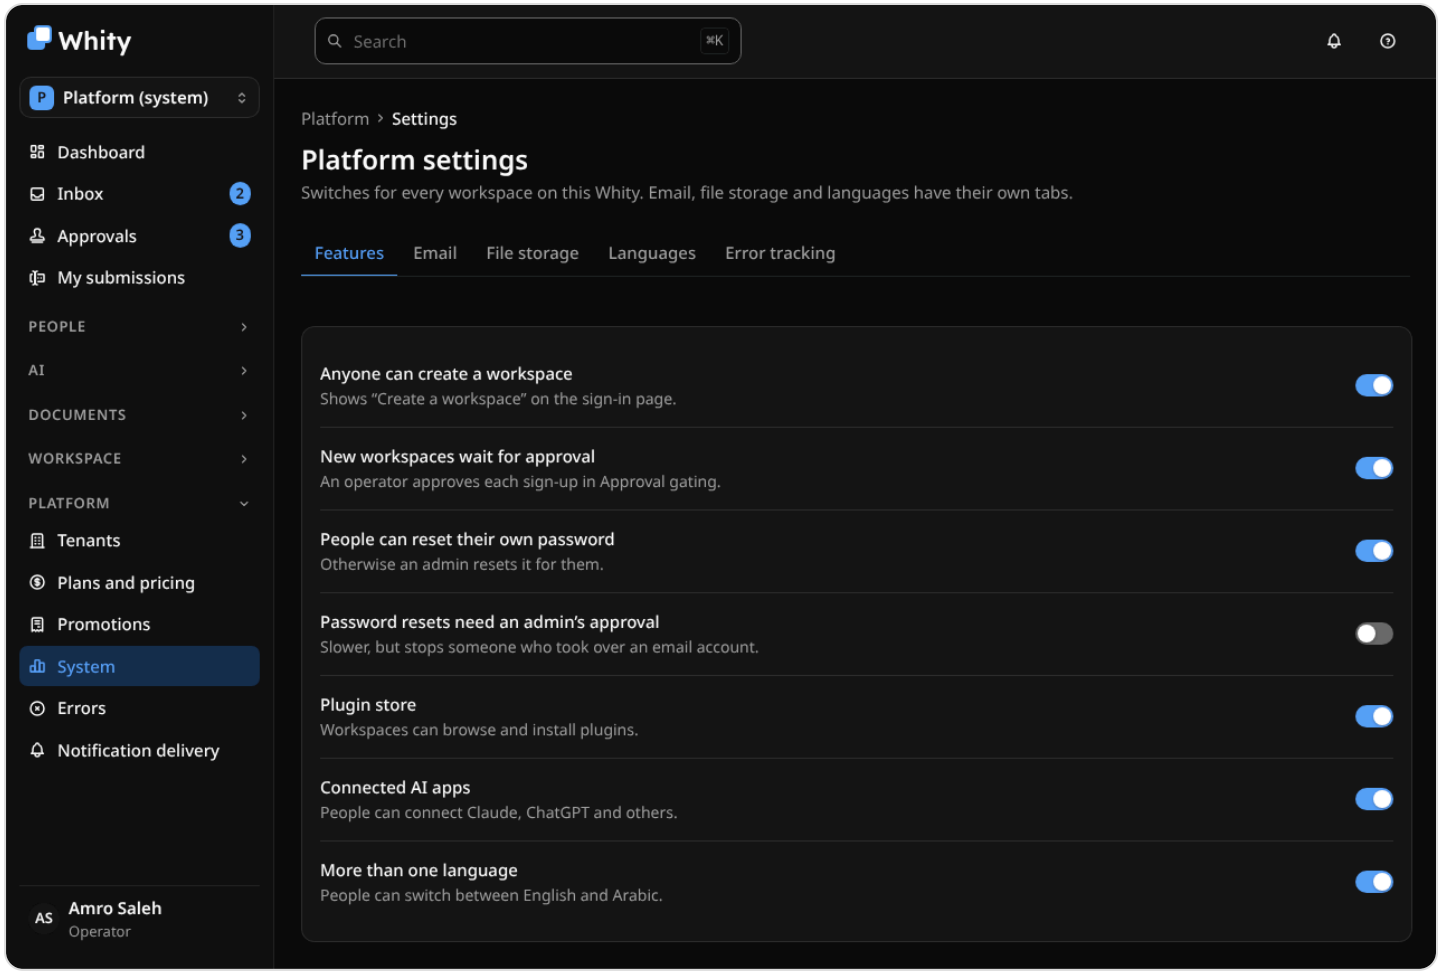

SECTION 26

Whity mobile

The Whity app for phones and tablets: a **do-on-the-go companion** to the web app (M.1), built once in Flutter with one Whity look and each platform's own behaviour (M.3). It is designed for one hand and for people of every age. Decisions M.1–M.47 (with CH.3 renaming the Agents tab to Chat); cards in the "Mobile" group. The work and operations areas add their own phone cards (section 27).

Principles

- **One thumb.** Everything a person does often sits in the lower half: the tab bar, the main button in a bottom bar (M.4), search (M.7), sheets, steppers. Titles stay at the top, where they're read, not reached.
- **Large and plain.** 17px text, never below 14px; 48 × 48 targets at least; the app follows the phone's text size up to the largest accessibility sizes (M.5).
- **Decide with the facts in front of you.** Approvals happen in the app, after Face ID where needed, never from a notification (M.44).
- **Motion means something.** Every animation explains an interaction: loose and dashed is "not yet", set down is "done", heavy is "this matters", stuck is "this needs you" (M.19–M.25).
- **Wears the installation's brand.** The app takes each installation's tokens when it connects, so every Whity installation gets a mobile app for free (M.13–M.17).

Sizes

What	Value
Drawn at	390 × 844 (iPhone 15); works from 360 wide
Body text	17px, minimum 14px; titles 26–30px; amounts in Geist Mono
Targets	48 × 48 minimum; rows 56px (settings) and 64px (lists); main buttons 52px; steppers 72px; PIN keys 80px
Corners	Buttons 13px, cards 18–22px, sheets 28px at the top
Tab bar	64px plus the home indicator; centre Create button 56px
Text size	Follows the phone, from default to the largest accessibility size; rows stack instead of truncating

The web app on a phone

The web app under 640px wide uses the same tab bar, rows, sheets and bottom bars as this app (PW.1–PW.11), so a person moving between them sees one product. It installs as the workspace's own app and asks for notifications once (PW.11). Cards: `PwNav`, `PwLists`, `PwLibrary`, `PwEditor`, `PwCalendar`, `PwSettings`, `PwBuilders`, `PwInstall`.

Navigation

A **bottom tab bar** (M.2, CH.3): **Home**, **Inbox**, the centre **Create** button, **Chat** (people and agents together; it was Agents), **More**. Pushed pages keep the tab bar; full-screen tasks (a decision, a form, the camera) hide it and show a bottom action bar instead. Holding Home switches workspace (M.17).

Tab	What it holds	Cards
Home	Waiting for you, one decision at a time by default or as a list (M.10); today's numbers	`TmHome`, `TmDecisionVariants`
Inbox	Waiting for me, Mentions, Updates; search and filters at the bottom (M.43)	`TmInbox`
Create	Ask an agent, then six tiles chosen by role and editable (M.11)	`TmCreateAgents`, `TmCreateFlows`
Chat	People and agents in one chat: direct chats and groups (CH.1–CH.3), and Agents today	`TmChat`, `TmCreateAgents`, `TmSearchMobile`
More	Your card, workspaces, My work, Manage (admins), You, Help (M.41)	`TmMore` and the pages below

Screens

ID	Screen	Cards
MB01	Story, three Lottie screens	`TmOnboardStory`
MB02	Create a Whity ID: details, email code, your picture, protect your account, workspace	`TmOnboardAccount`, `TmOnboardPicture`
MB03	Preferences with real UI in motion; guided tour	`TmOnboardPrefs`
MB04	Connect an installation and take its theme; switch workspace	`TmConnect`
MB05	Tenant creator setup; a customer joining in one tap; approving a sign-in by number	`TmCreatorCustomer`
MB06	Unlock, app PIN, a new phone, a lost phone	`TmSignBack`
MB10	Home, a decision full screen	`TmHome`
MB11	Edit before approving, decline with a reason, tier 3 after Face ID, decided by me	`TmDecisionVariants`
MB12	Inbox	`TmInbox`
MB13	Create sheet; scan a receipt; ask by voice; a quick note	`TmCreateAgents`, `TmCreateFlows`
MB14	Chat with people and agents, agents today, an agent asking first	`TmChat`, `TmCreateAgents`, `TmSearchMobile`
MB15	Search everything	`TmSearchMobile`
MB16	Push notifications and in-app banners	`TmPush`
MB20	More, workspaces, profile, help and about	`TmMore`
MB21	Preferences: display, swipes, notifications, which hand	`TmPreferences`, `TmHandAccess`
MB22	Sign-in and security: status, devices, sign-ins, app lock, password, authenticator, recovery codes, passkeys	`TmSecurity`, `TmSecuritySetup`
MB30	People: list, a person, asking to join, inviting	`TmPeople`
MB31	Managing agents: list, an agent, pausing, activity	`TmAgentsManage`
MB32	Documents: to sign, reading, routing, signing	`TmDocumentsMobile`
MB33	Forms and my requests; filling; check and send; stock count	`TmFormsMobile`
MB34	Billing; activity and security; workspace settings; sending to the web	`TmWorkspaceMobile`

ID	Screen	Cards
MB40	States: offline, installation not answering, updating, all caught up, session ended, update needed, no access, error	`TmStatesMobile`, `TmStatesMore`
MB41	Motion and resistance	`TmMotion`
MB50	The customer app: home, paying, tracking, account	`TmCustomerApp`
MB60	Arabic	`TmArabicMobile`
MB61	Tablets	`TmTablet`
MB62	Hands and accessibility	`TmHandAccess`

What the phone does, and what goes to the web

On-the-go essentials (M.40): decide (approve, decline, edit first), sign documents, fill forms, count stock, scan receipts, talk to agents, let people in, invite, pause or remove people, pause agents, see activity and billing, and manage your own account and security. Deep setup — roles and permissions, groups and units, route templates, the document designer, the form builder, branding, plugins, the audit log in full — opens on the web. "Open on the web" sends a one-time link by email that works for 15 minutes; the sign-in is approved on the phone (M.32).

Gestures and motion

- **Swipes are the person's choice** (M.6): left and right are each chosen (mark read, archive, snooze, delete); every swipe has Undo.
- **Swipe to approve** is off by default and only ever approves tier-1 and tier-2 items (M.9). Its direction follows the hand setting (M.46).
- **Heavy destructive swipes** (M.20, M.24): the row moves at a third of the thumb's speed, red grows, a firm haptic at 70% marks the point of no return; let go early and it springs back.
- **Tier 3 is stuck** (M.21): the card moves 10px at most, shudders twice with two short buzzes, then the verification sheet asks for Face ID.
- **Approving sets the sheet down** onto its plane and turns it solid (the `approve-set-down` Lottie for one card, LT.4; 200 ms in code when approving several); the next card slides up (the story's motion, M.23).
- **Timing:** ease-out, 200–400 ms, no bounce on anything destructive. **Reduce motion** (M.25): fades; resistance stays as haptics and colour; Lottie shows its last frame.

Security

- **Whity ID**, one account for every installation (M.26), created with email and password, Apple or Google (M.27).
- **This phone is a passkey** and approves sign-ins elsewhere by **number matching**, then Face ID (M.32, M.33).
- **App lock** (M.8): Face ID or fingerprint after 5 minutes by default, a 6-digit app PIN as fallback; five wrong PINs sign the phone out.
- **Tier 3 always asks for Face ID** and can't be swiped or turned off; verification lasts 2 minutes.
- **Sign-in and security** shows a status checklist (strong password, passkey, recovery codes, authenticator; M.42), devices with sign-out, recent sign-ins, recovery codes (Face ID to show), passkeys, and an authenticator set up on the same phone by link or key.

Theming and identity

- On connecting (email first, or QR or address; M.14) the app pulls the installation's full tokens: colours, type, corners, logo, name, light and dark (M.15). The 17px and 48px minimums always hold; a colour pair that fails contrast falls back to Whity's.
- Free: the Whity app, branded inside. Paid: an installation's own store app built from the same code (M.16). Switching workspace re-themes the whole app (M.17).
- **Pictures** (M.34–M.38): a photo, or a seeded pattern built from the mark's own pieces in the colours of the installation where the Whity ID was made (`Avatar pattern hue`, `W.avatarPattern`, `W.brandHue`). People only: agents keep the robot.

Notifications

They **only open the app** (M.44). Each names its workspace; amounts are hidden on the lock screen by default; several from one agent stack. Press and hold shows the text and **Open in Whity**. Opening asks for Face ID and lands on that decision. Inside the app, a new decision arrives as a 4-second banner at the top with **View**. Sign-in approvals come first, are never grouped, and can't be turned off. Quiet hours (22:00–07:00 by default) let sign-in approvals through.

Offline and states

Offline, tier-1 and tier-2 decisions queue and send when the connection returns; signing and tier 3 wait. Every state says what happened, whether anything was lost, and one next step: offline, an installation not answering, updating, all caught up, session ended, update needed, no access (with "Ask for access"), and errors with a reference code.

Arabic

Fully mirrored (M.45): tab order, arrows, lists, sheets and swipe directions. Noto Sans Arabic at the same sizes. Western digits; amounts, codes and invoice numbers stay left to right in mono. "Whity" is always in Latin letters. **The main button follows the hand, not the reading direction**: with the right hand (default) Approve stays on the right in Arabic too.

Hands and accessibility

- **Which hand** (M.46), right by default: moves the main button in two-button bars and steppers, and the swipe-to-approve direction. The tab bar and Create stay centred.
- **Screen readers** read a decision card as one sentence (who, for whom, what, how much in words, how long), then its buttons; agents are always introduced as agents.
- Colour is never the only signal; motion follows Reduce motion; every target is 48px or more.

Tablets

Two panes from 744 points wide (M.47): the list (400 points) beside its detail, a side rail instead of the tab bar (on the right in Arabic), sheets as centred dialogs or popovers, actions at the bottom right of the detail. Narrower windows get the phone layout.

The customer app


A tenant's customers (M.29, M.31) join from a link or QR in one tap and see only the tenant's product, in the tenant's brand, with the tenant plugin's tabs (here Home, Orders, New order, Messages, Account), payments (CliQ, card, cash on delivery), order tracking and a small account page with "Built on Whity". No story, tour, Manage or agent approvals.

For the build

The cards draw the screens with web components and `.wm-*` classes in `bundle.css`; they are the visual and behavioural reference, not the Flutter code. Flutter takes its tokens from the Flutter brand extension in `handoff/` (section 12), themed at runtime from the installation's published tokens (M.13, M.15). Lottie files follow the keyframe notes in `TmOnboardStory` and `TmMotion`. Icons are the same 137 Tabler names.

IN USE


Home and a decision

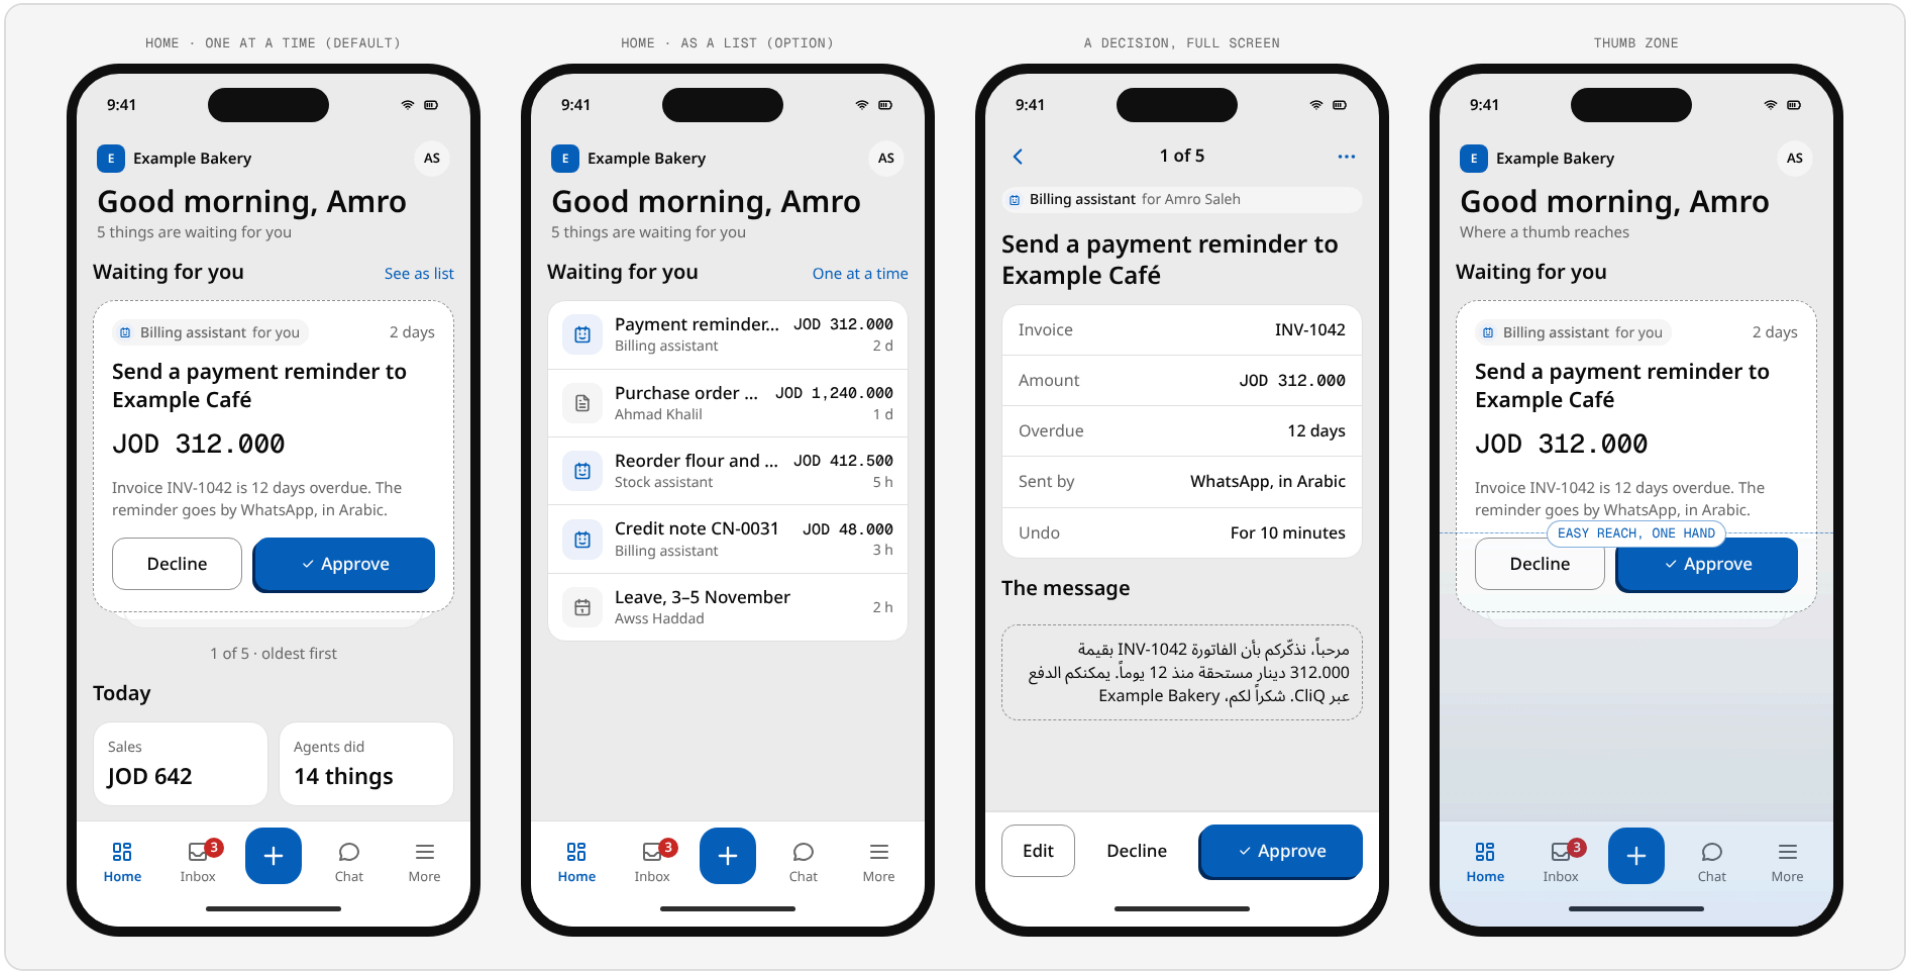

Home, one decision at a time

IN USE


Deciding: edit, decline, tier 3

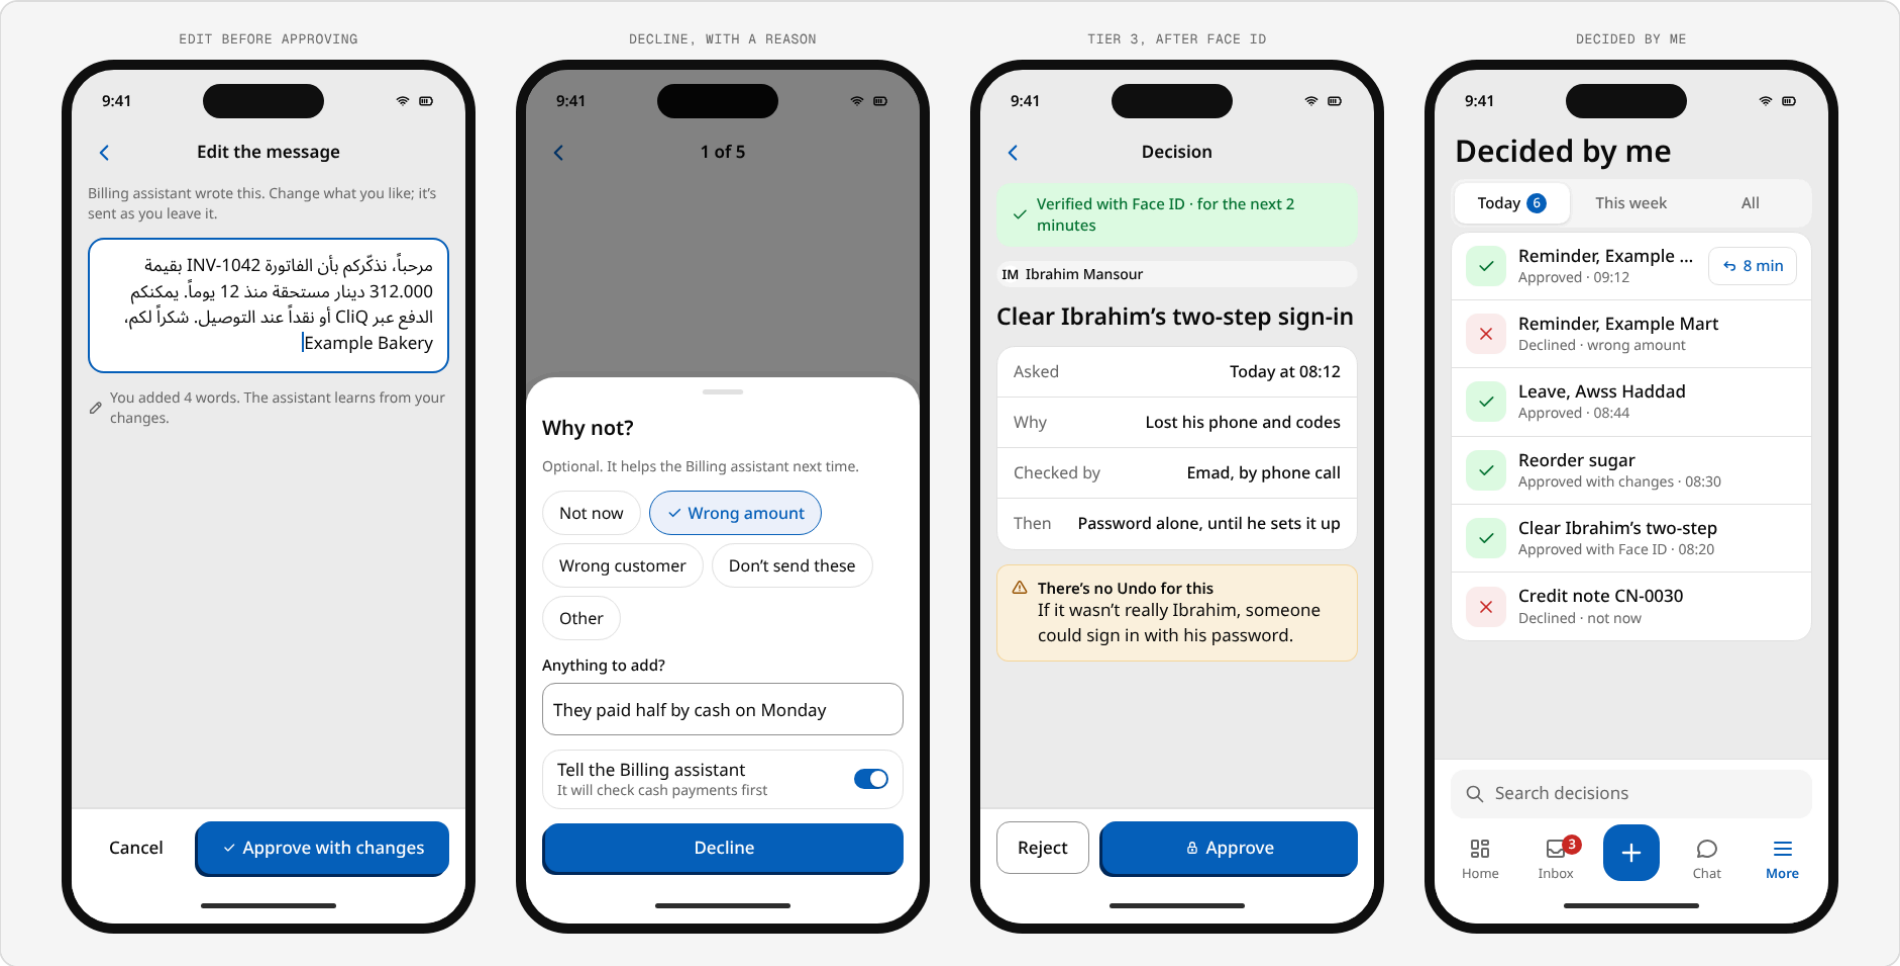

Edit first, decline with a reason, tier 3 after Face ID

IN USE


Arabic on the phone

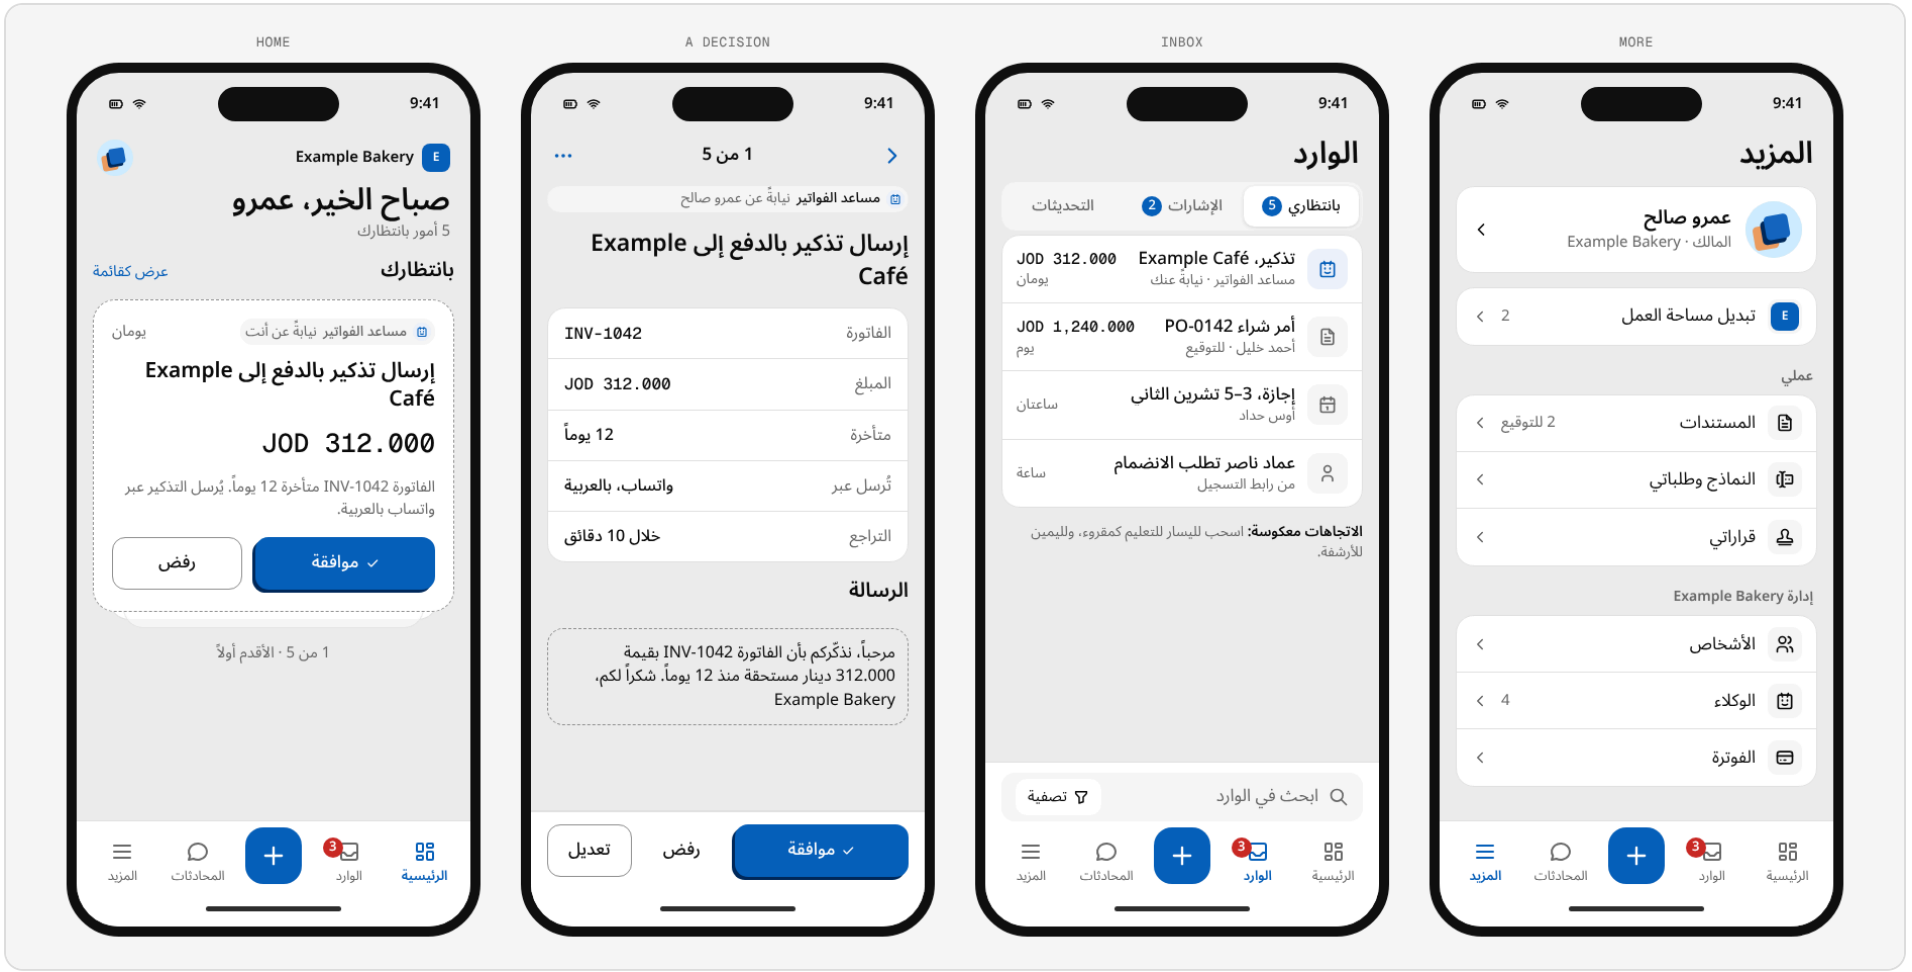

Mirrored, with the main button following the hand

IN USE


The customer app, in the workspace’s brand

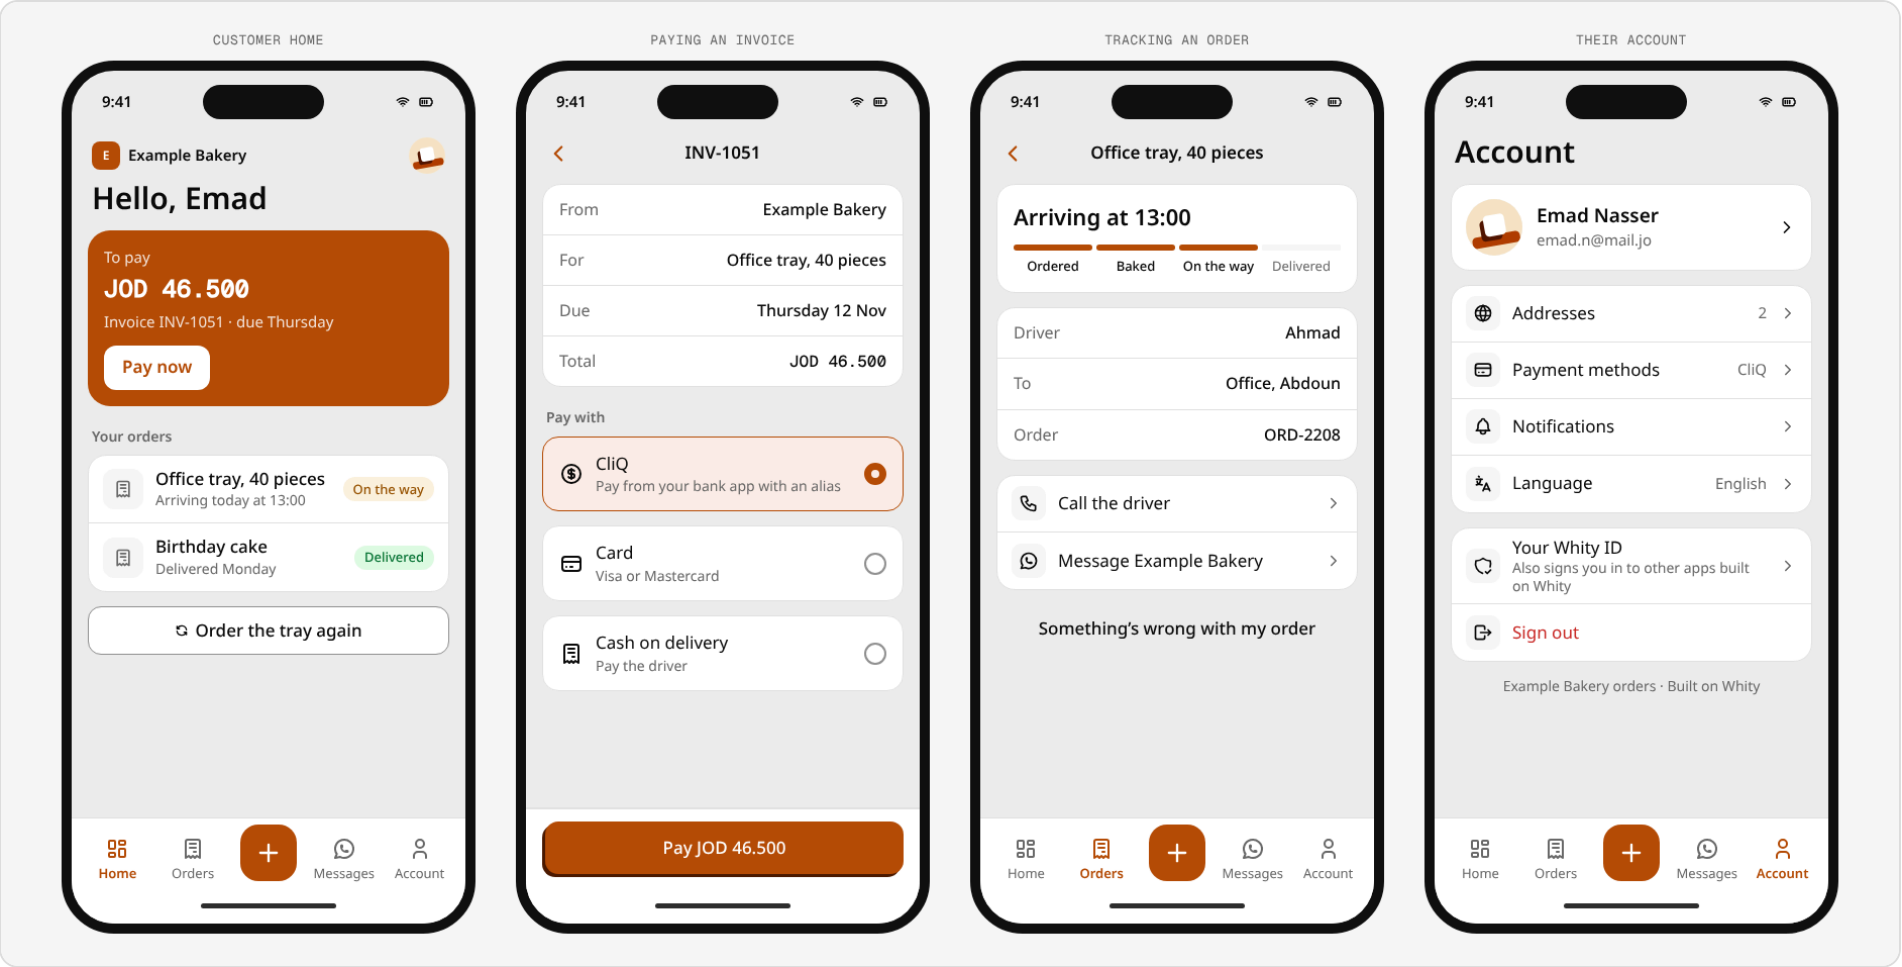

Home, paying, tracking, account

IN USE


The web app on a phone: navigation, More, Create

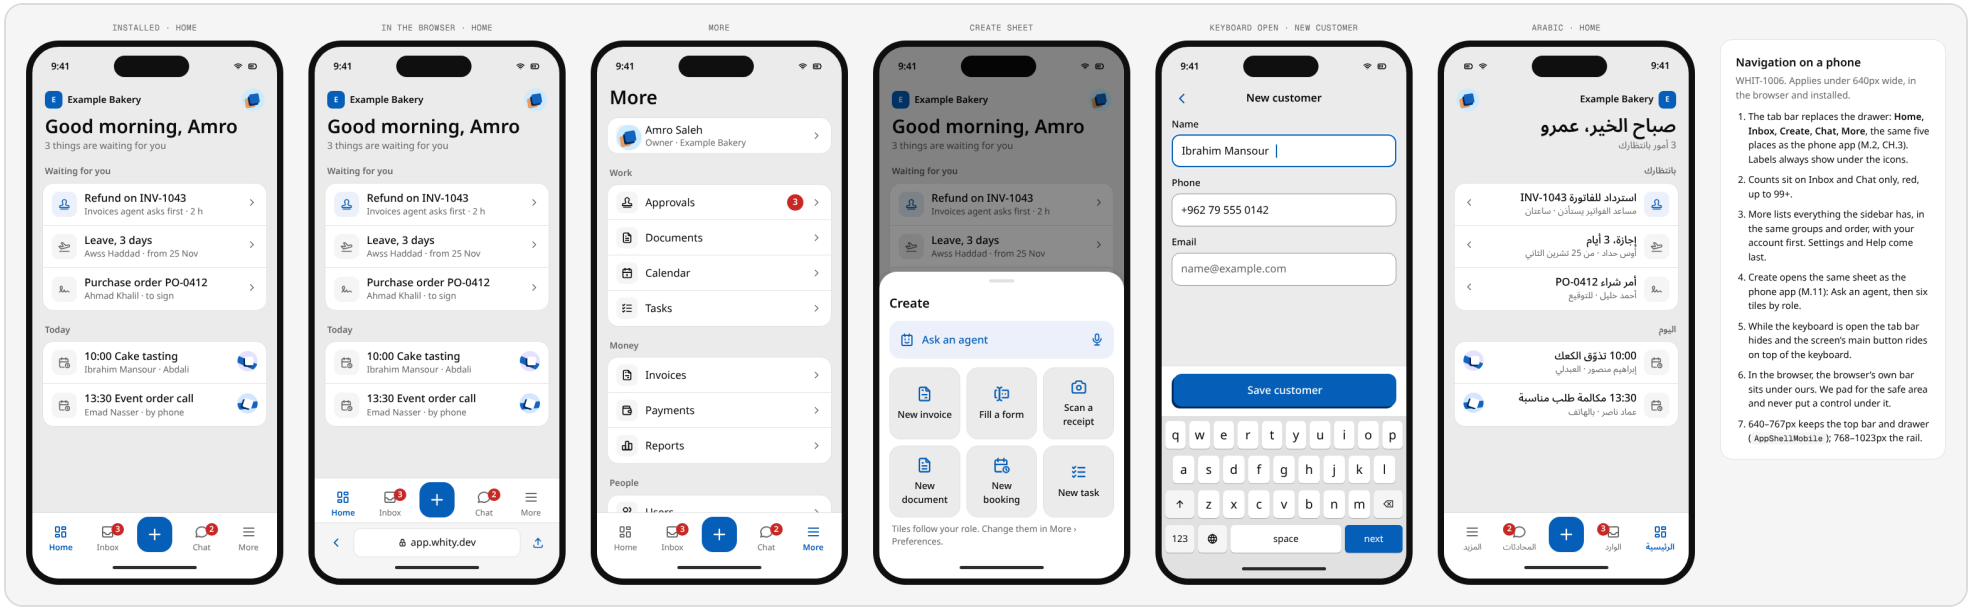

Under 640px: the tab bar, More, Create, the keyboard

IN USE


The web app on a phone: the editor

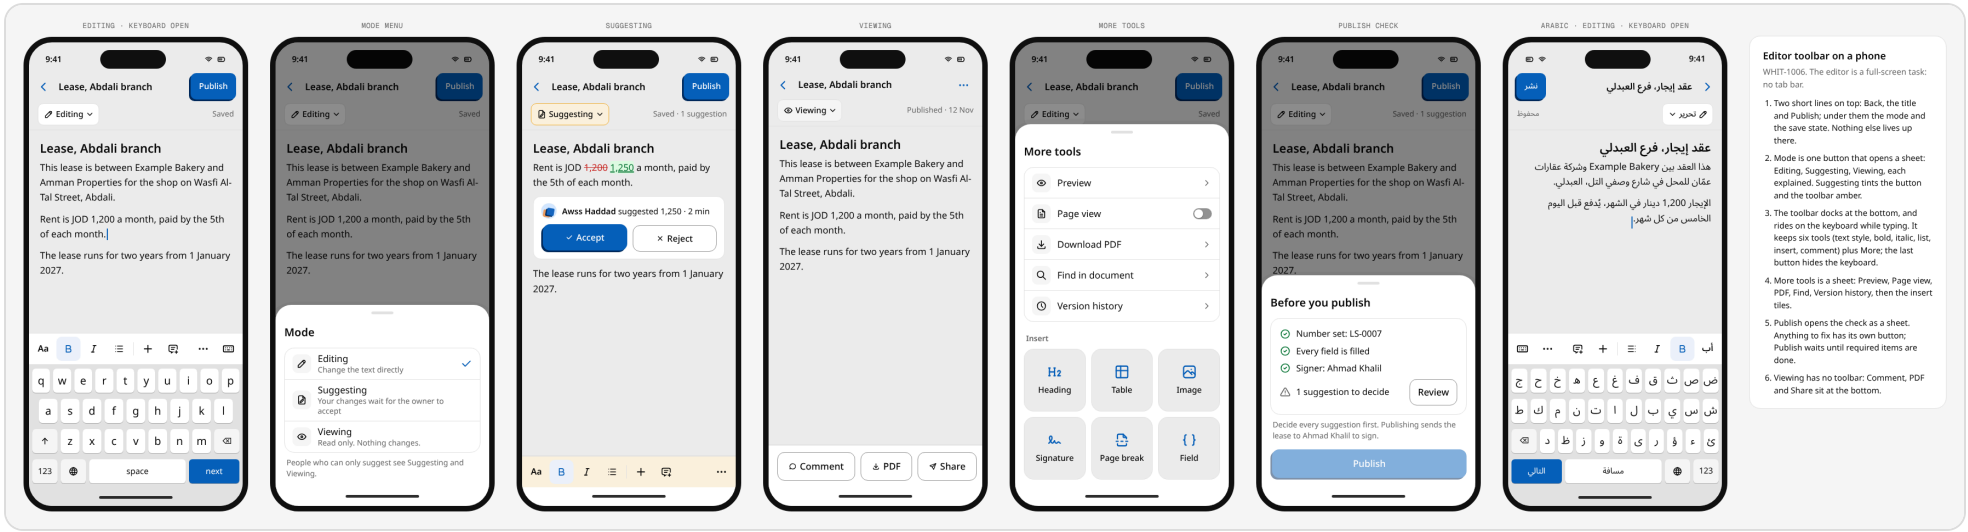

Toolbar, modes and the page on a phone

IN USE

Installing the web app, and notifications

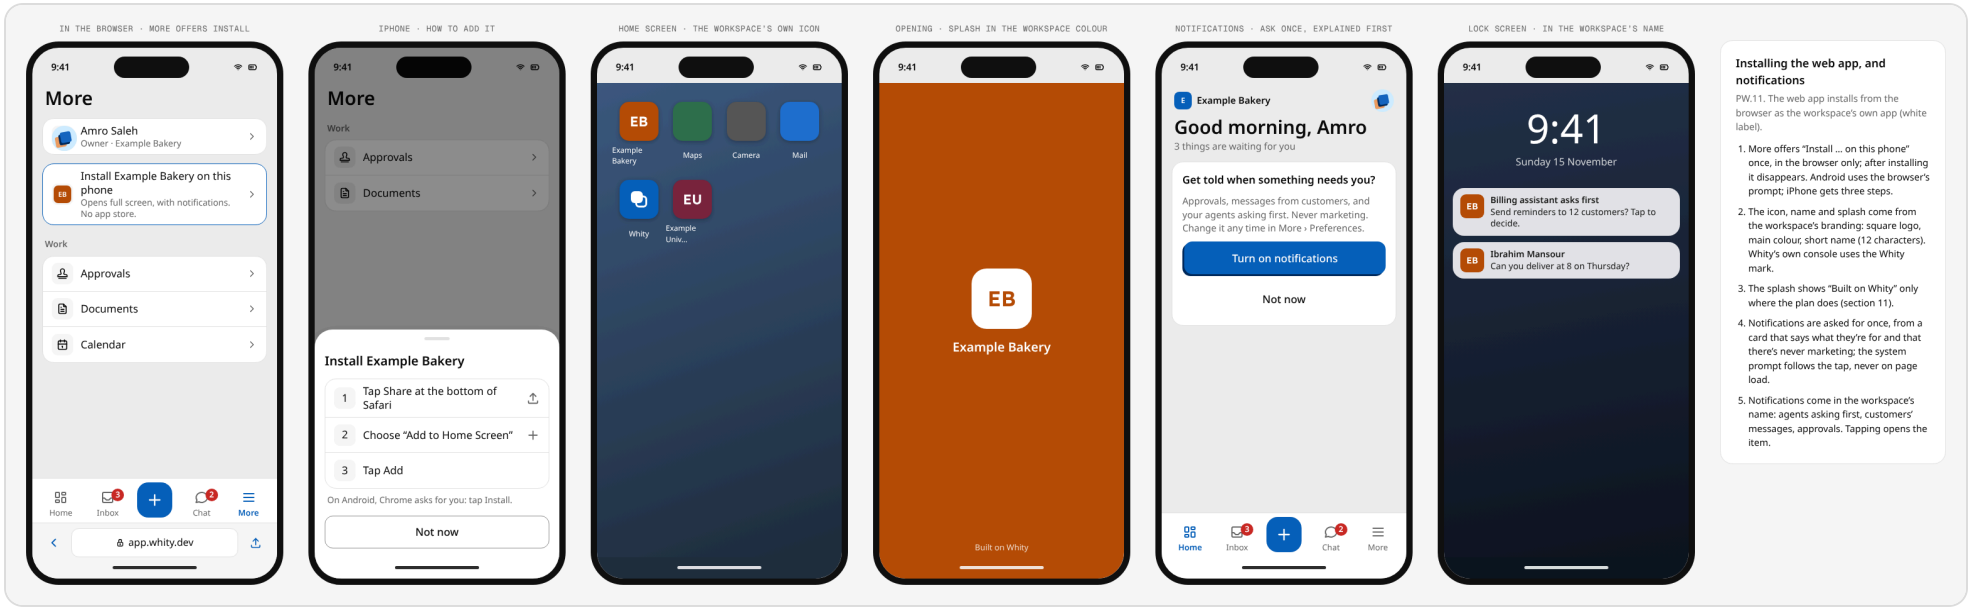

Install once, the workspace's icon and splash, notifications asked for once

SECTION 27

Work and operations

Sixteen areas of everyday work, designed for the web and the phone in full (X.1): documents, flows, agents, agent chats, meetings, inventory, tasks, boards, organisational units, roles and delegations, approvals, approval gating, forms, applications, money and expenses, subscriptions and tiers, appointments. Cards in "Templates · Work" (web) and "Mobile" (phone). Decisions X, T, MT, AP, IN, MO, SU, AA, CH, AQ, AG, FL, OR and DC.

Sidebar

A **Work** group follows the top items: Tasks, Boards, Meetings, Appointments, Applications, Flows. **Operations** holds Inventory, Money and expenses, and Subscriptions. **Chat** sits among the top items, for people and agents together (CH.1). On the phone they're under More › My work, and anything waiting for a person also shows on Home and in the Inbox.

Tasks, on Taskaat

Tasks integrate with **Taskaat** (taskaat.dev), which is the engine (T.3): projects, sections, tasks, checks, evidence and decisions live there, and Whity's pages read and write them with Whity's people, agents, permissions and look. "Open in Taskaat" opens the same task.

- **Agents finish their own tasks** within their scope (T.1); "Ask first" actions still become proposals in Approvals.
- **Done when** (T.4): an agent's task must say what done means before work starts; people may add one. The agent submits **evidence** item by item, and the task waits at the **gate** ("Awaiting your review") for a person to **Accept as done** or **Send back**. Closed without passing evidence, a task stays **Done, unverified**.
- **Decisions** record the reasons behind choices, for people and later agent sessions.
- Cards: `TplTasks`, `TmTasks`.

Boards

A board is **a view of tasks** (T.2): a Taskaat project whose columns are statuses. Default columns To do, Doing, **Awaiting review** (the gate, amber), Done. Dragging lifts a card onto the plane; it can't skip the gate without being marked unverified. On the phone, one column at a time with a row of column pills, and **Move to** from a long press. Board settings work on the phone too. Cards: `TplBoard`, `TmBoards`.

Meetings

Everyday meetings and **formal meeting bodies** (X.3): committees with a chair, secretary, members, schedule and quorum, and numbered meetings. During a formal meeting the phone shows the current agenda item with a timer, the recording state (everyone told), and tiles to add a note, a resolution with its vote, or an action item. Afterwards the **Minutes assistant drafts the minutes** from the notes and recording (MT.1); the secretary edits or approves, the chair signs, and the minutes are filed in Documents. Resolutions are numbered per meeting (14/1) with votes; action items become Taskaat tasks on approval. Cards: `TplMeetings`, `TplMeeting`, `TmMeetingsMobile`.

Appointments

Customers and staff both book (AP.1). Staff see a day or week calendar with people and rooms as columns: booked, checked in, requests needing an OK, and blocked time. Customers book on the tenant's **booking page** or in the customer app: service, day, time, then a WhatsApp confirmation and reminders. Staff set their availability, breaks and services on the web or the phone. Cards: `TplAppointments`, `TplBookingPage`, `TmAppointmentsMobile`.

Inventory

Stock in every place, plus **recipes and batches** (IN.1). Stock shows each item per place against its reorder level; the **Stock assistant** proposes reorders as purchase orders grouped by supplier, with why. Items you make have a **recipe**: ingredients for one batch, the batch cost and the cost per unit, the selling price and margin. **Making a batch** takes the ingredients out of stock, adds the product with a batch number and expiry date, and prints labels; a shortage says what to do. Batches near their date are flagged and sold first. On the phone: stock by place with a scanner, an item and its batches, making a batch with a stepper, and transfers. Cards: `TplInventory`, `TplRecipe`, `TmInventoryMobile`.

Money and expenses

Spending, getting paid and **light accounting** (MO.1). The overview shows bank and cash, what's to collect and to pay, the sales tax due, what waits for you, and budgets by team. **Accounts** are a plain-worded chart with codes; journal entries are made for you from claims, invoices and payments, with the **Bookkeeping assistant** proposing the accounts for bank lines and a person posting them. The **sales tax return** for each two-month period is prepared with JoFotara reporting counts, downloaded to file with the Income and Sales Tax Department, then marked filed. Export for your accountant hands over entries and receipts. On the phone: money at a glance, approving claims, adding a card payment's receipt with the camera, and checking the assistant's entries. Cards: `TplMoney`, `TplLedger`, `TmMoneyMobile`.

Subscriptions and tiers

Two kinds (SU.1). The workspace's own Whity plan stays in Billing. **Plans a tenant sells** (memberships, weekly boxes, service plans) come in tiers with price, period, what's included and subscribers; failed payments retry three times over a week with a WhatsApp and a link to pay, then the plan pauses. Customers choose, skip, pause and change tiers in the customer app. Cards: `TplSubscriptions`, `TmSubscriptionsMobile`.

Applications

Requests people send (X.4), **reviewed in stages with a scoring panel** (AA.1). Each application type has a public form, stages and criteria. The **Screening assistant** checks documents first and asks applicants for what's missing. Reviewers score each criterion from 1 to 5; **others' scores stay hidden until you've saved yours**. Applicants follow their application's stage and add documents from the phone. Cards: `TplApplications`, `TplApplication`, `TmApplicationsMobile`.

Chat, with people and agents

One chat for everyone (CH.1): agents are teammates who join direct chats, groups and project chats. They're always marked: the robot face, an **Agent** tag, who they work for in that chat, and a blue edge or tint on what they write. Adding an agent (CH.2) says what it can read (from now on by default), who it works for there, and what it may do, action by action, never more than that person; everyone sees it join. Proposals appear as dashed cards with who must decide; hand-offs between agents and "is drafting" are visible lines. Beside each chat: the people, the agents, and what each agent may do here. On the phone the fourth tab is **Chat** (CH.3). Cards: `TplChat`, `TplChatAddAgent`, `TmChat`.

Agents

The 2.8 agent pages (section 24) stay; agents can now also be **set up on the phone** in four steps: start from a preset, instructions and who it works for, what it may do (Off, Ask first, Allowed), and where it works (channels, chats, boards). Cards: `TmAgentSetup`, with `TmAgentsManage` for managing them.

Approvals

One at a time stays the default; a **List** view lets ordinary **tier-1** items be approved together (AQ.1), with the count and total in the bulk bar and an Undo for each. Kinds are named in plain words: Ordinary, Check first, Needs verifying. Tier 2 and 3 always open on their own. Cards: `TplApprovalsList`, `TmApprovalsGating`, with `TplAgentApprovals` and the phone's decision cards.

Approval gating

Sign-ups, password resets and two-step resets (AG.1): every approval asks for **Face ID or a passkey**, and **clearing someone's two-step needs a second admin**. A request shows when and where it came from, the account, the identity checks done and by whom, the two approvals, and that there's no Undo. Cards: `TplGatingTwoStep`, `TmApprovalsGating`, with `TplApprovalGating`.

Flows

Workflows across everything (FL.1): a trigger (created, changed, late, below a level, a schedule), steps where **people decide** and **agents act**, conditions with two branches, waits, and done. A document's route is one kind of flow, so Route templates now live under Flows. Each flow reads as **a sentence** with its changeable words highlighted. The builder draws it top to bottom with a **+** on every connector; a step's settings start with its sentence, then who decides, what they can do, and what happens if no one answers or while they're away. **Try it** runs on a sample; new versions apply to new runs. On the phone, flows (and forms) are **a list of steps in sentences** (FL.2). Cards: `TplFlows`, `TplFlowBuilder`, `TmFlowsMobile`, `TmFormBuilderMobile`.

Organisational units, roles and delegations

The 2.5 pages (section 21) stay, with names instead of numbers. **I'm away** (OR.1) hands your approvals, agents' proposals and, if you choose, documents to sign to someone for set dates; anything above what they may approve waits; flows route to them and their decisions are recorded as on your behalf. On the phone: the organisation **level by level**, changing a role (described in plain words, powerful roles ask for Face ID), I'm away and the delegations in force. Cards: `TplAway`, `TmOrgMobile`, with `TplOrgUnits`, `TplRoles`, `TplRoleRecord`, `TplDelegations`.

Documents

The library, a document's page, its routing and the editor (sections 18 and 23) stay. On the phone (DC.1): read and sign, **comment** on highlighted text, **suggest** changes (red struck, green added, the owner accepts), tick checklists, and ask an agent to help with a paragraph; its changes arrive as suggestions. Cards: `TmDocumentsMobile`, `TmDocEditMobile`.

Forms


The builder, filling in, the public form and responses (section 22) stay. On the phone the **builder** is a list of questions with **+** between them, large tiles for question kinds, each question's settings (required, show only if, Arabic wording), and publishing with a QR code and link. Cards: `TmFormBuilderMobile`, `TmFormsMobile`.

Coverage

Area	Web	Phone
Documents	`TplLibrary`, `TplDocRecord`, `TplDocRouting`, editor cards	`TmDocumentsMobile`, `TmDocEditMobile`
Flows	`TplFlows`, `TplFlowBuilder`, `TplFlowEditor`	`TmFlowsMobile`
Agents	`TplAgents`, `TplAgentPresets`, `TplAgentRecord`, `TplAgentInstructions`, `TplAgentScope`	`TmAgentsManage`, `TmAgentSetup`
Agent chats (Chat)	`TplChat`, `TplChatAddAgent`	`TmChat`, `TmCreateAgents`
Meetings	`TplMeetings`, `TplMeeting`	`TmMeetingsMobile`
Inventory	`TplInventory`, `TplRecipe`	`TmInventoryMobile`, stock count in `TmFormsMobile`
Tasks	`TplTasks`	`TmTasks`
Boards	`TplBoard`	`TmBoards`
Units, roles, delegations	`TplOrgUnits`, `TplRoles`, `TplRoleRecord`, `TplDelegations`, `TplAway`	`TmOrgMobile`, `TmPeople`
Approvals	`TplAgentApprovals`, `TplApprovalsList`	`TmHome`, `TmDecisionVariants`, `TmApprovalsGating`
Approval gating	`TplApprovalGating`, `TplGatingTwoStep`	`TmApprovalsGating`
Forms	`TplFormsManage`, `TplFormBuilder`, `TplFormFill`, `TplFormResponses`	`TmFormsMobile`, `TmFormBuilderMobile`
Applications	`TplApplications`, `TplApplication`	`TmApplicationsMobile`
Money and expenses	`TplMoney`, `TplLedger`	`TmMoneyMobile`, receipts in `TmCreateFlows`
Subscriptions and tiers	`TplSubscriptions`, `TplBilling`, `TplPlans`	`TmSubscriptionsMobile`, `TmWorkspaceMobile`
Appointments	`TplAppointments`, `TplBookingPage`	`TmAppointmentsMobile`

IN USE


Tasks

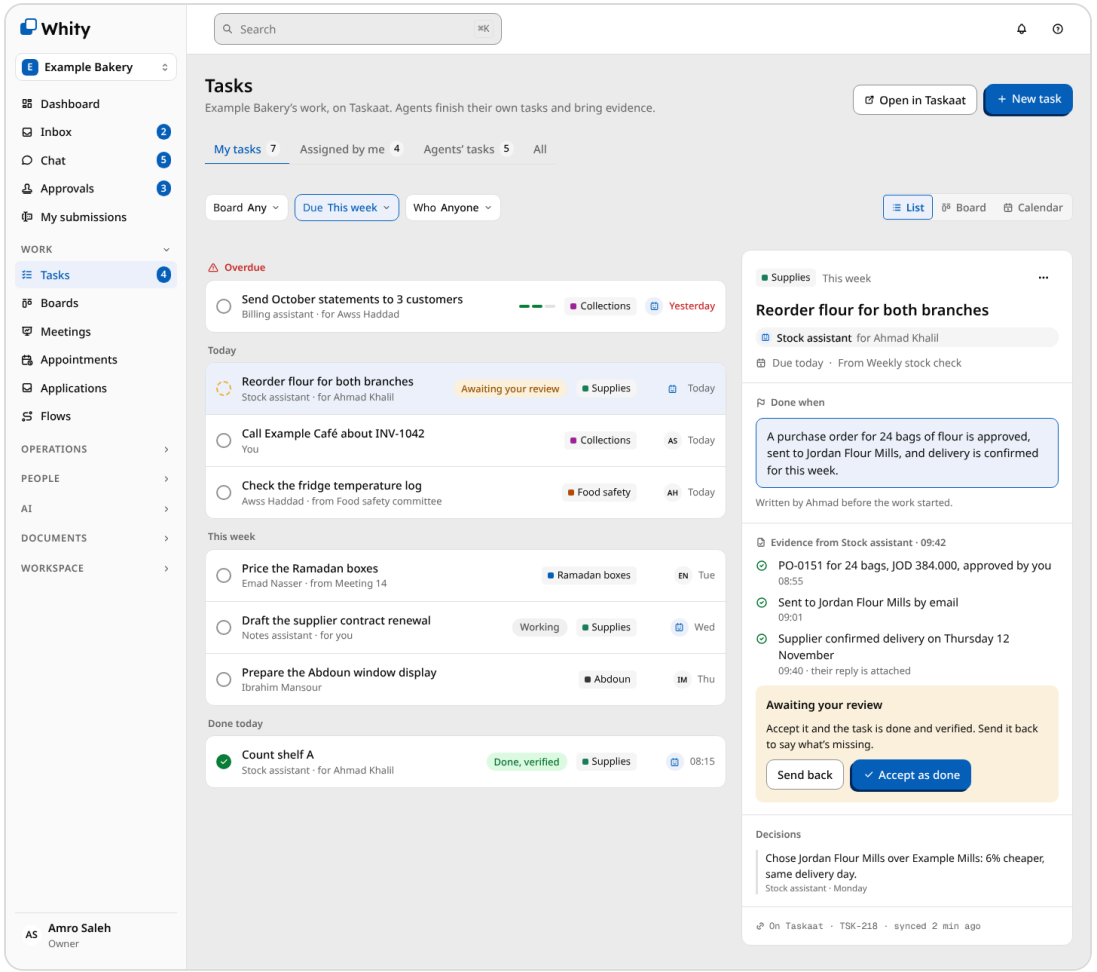

Tasks

IN USE


Chat with people and agents

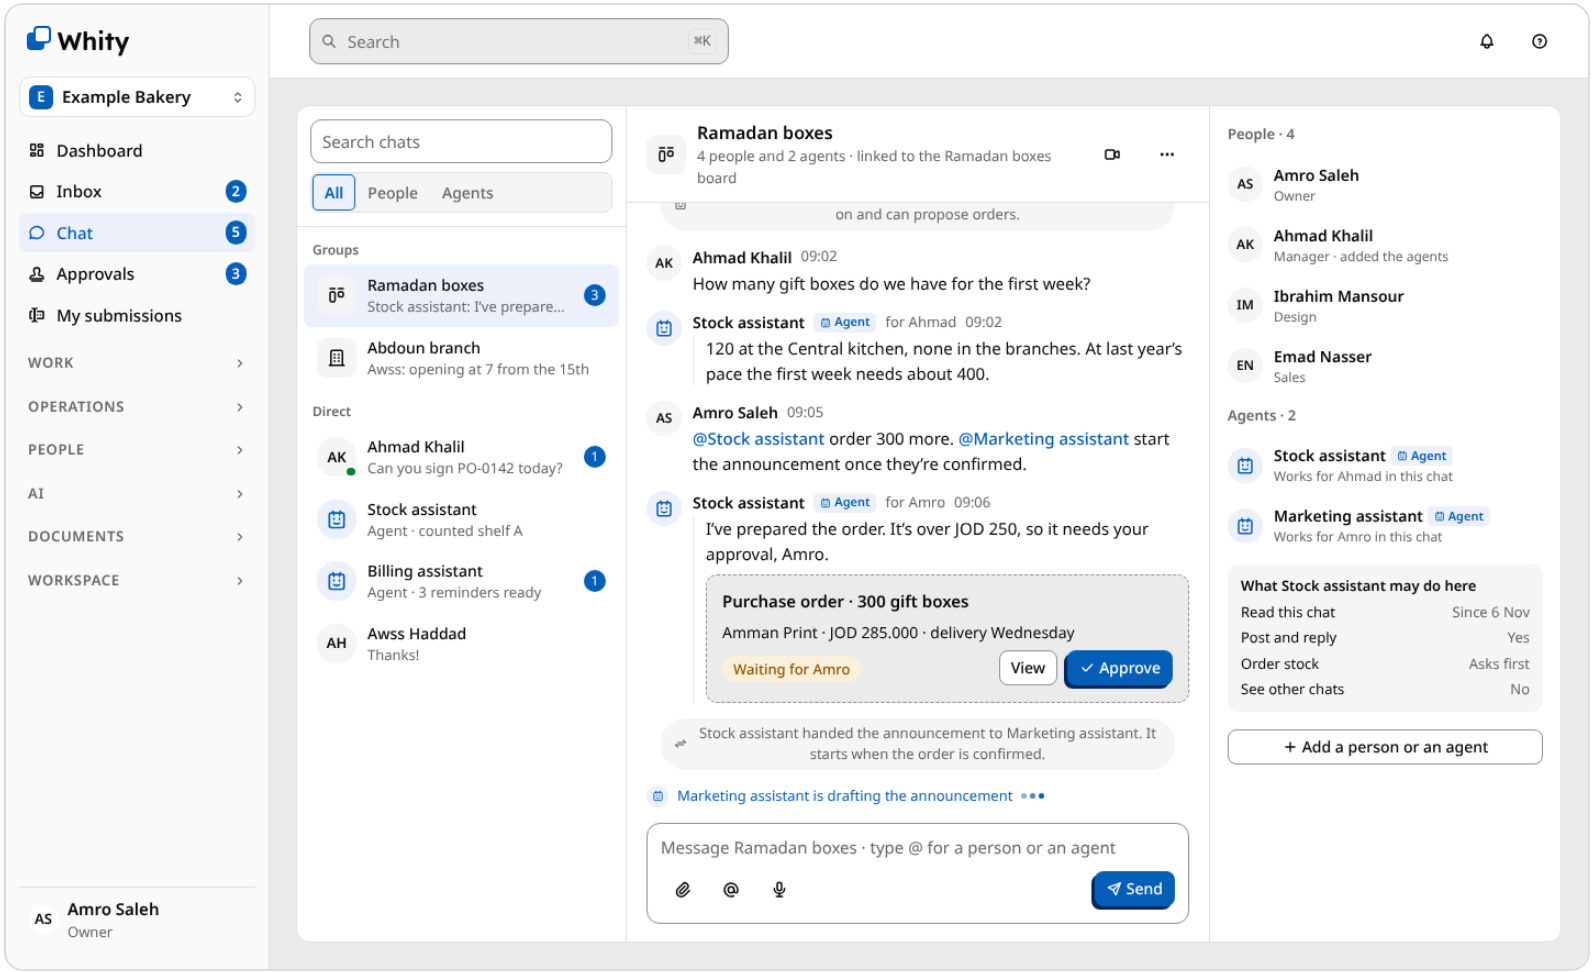

People and agents in one chat

IN USE


Money

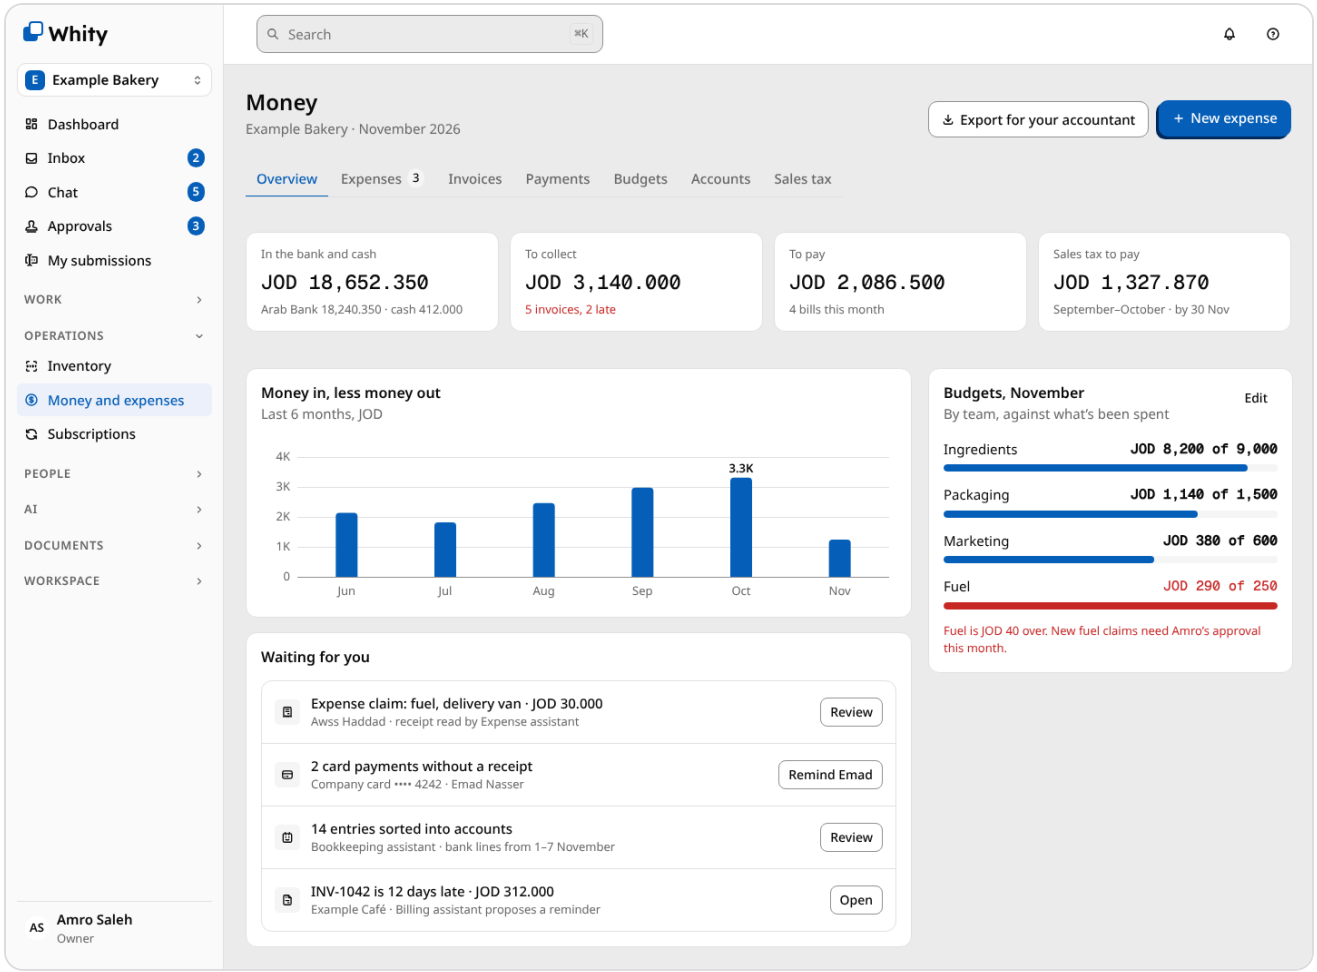

Money

IN USE


Inventory (dark)

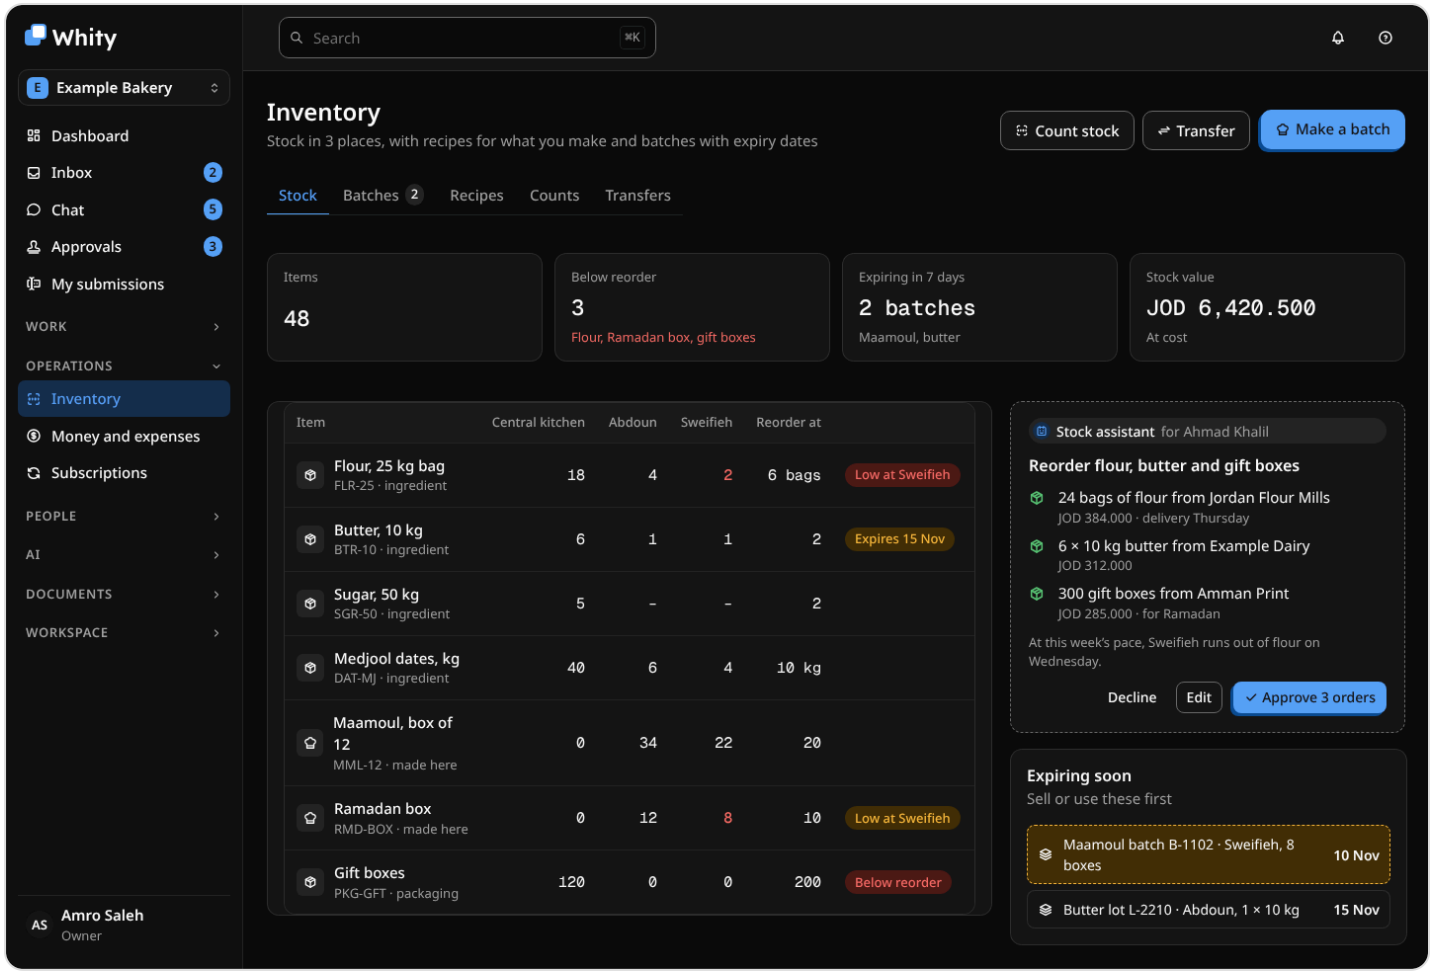

Inventory (dark)

IN USE


The calendar on a computer

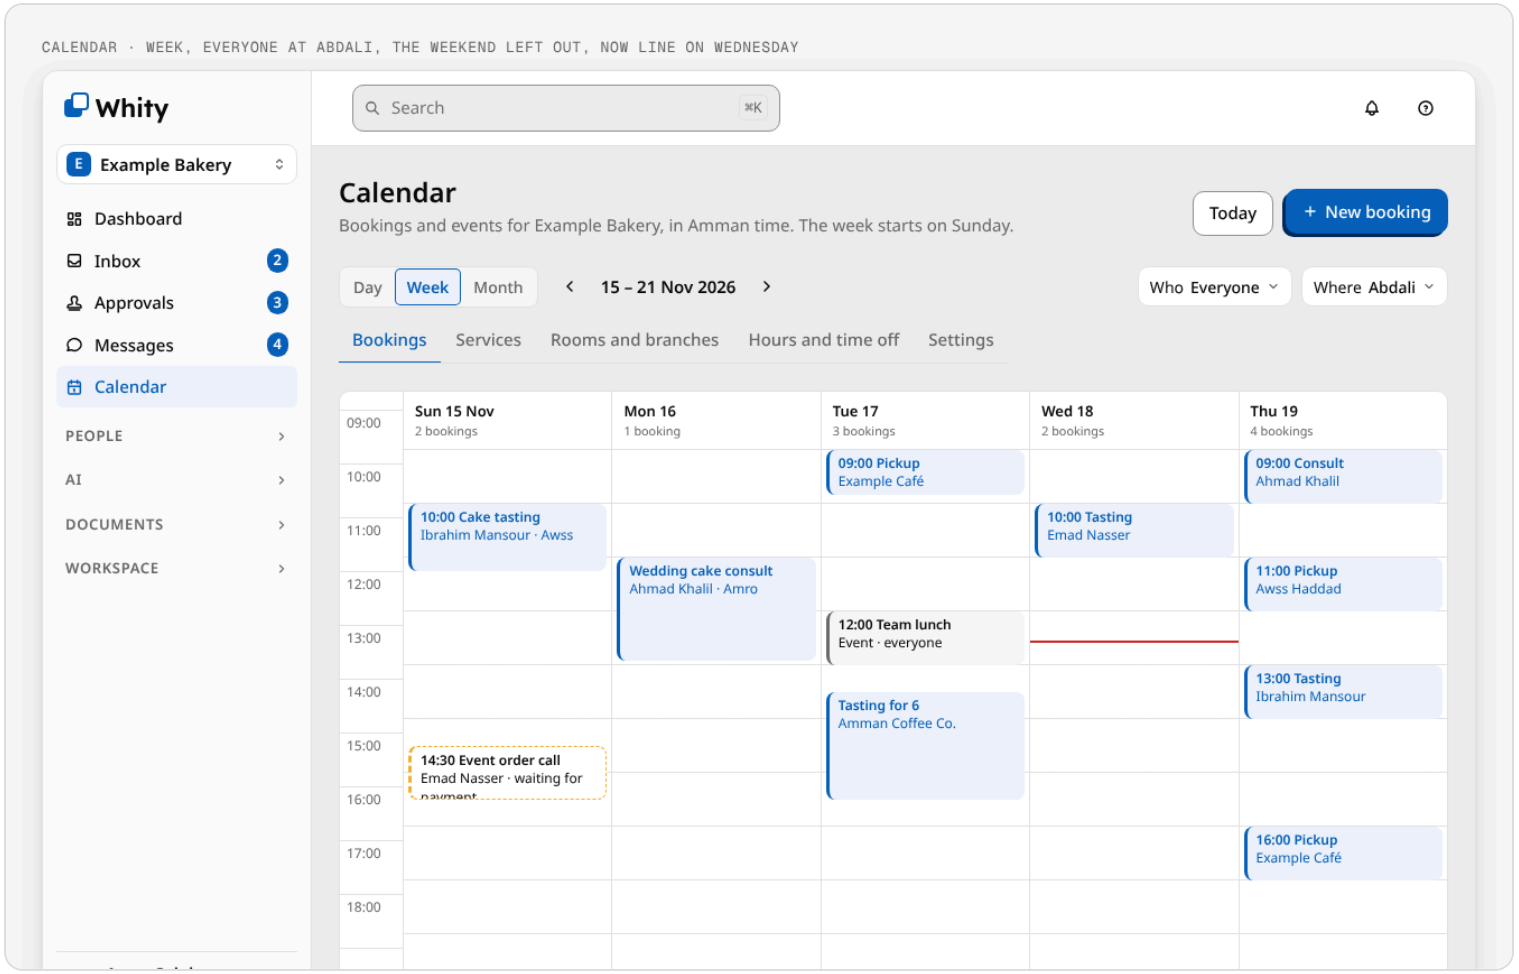

Week by time with the booking sheet

IN USE


A customer’s own booking: move or cancel

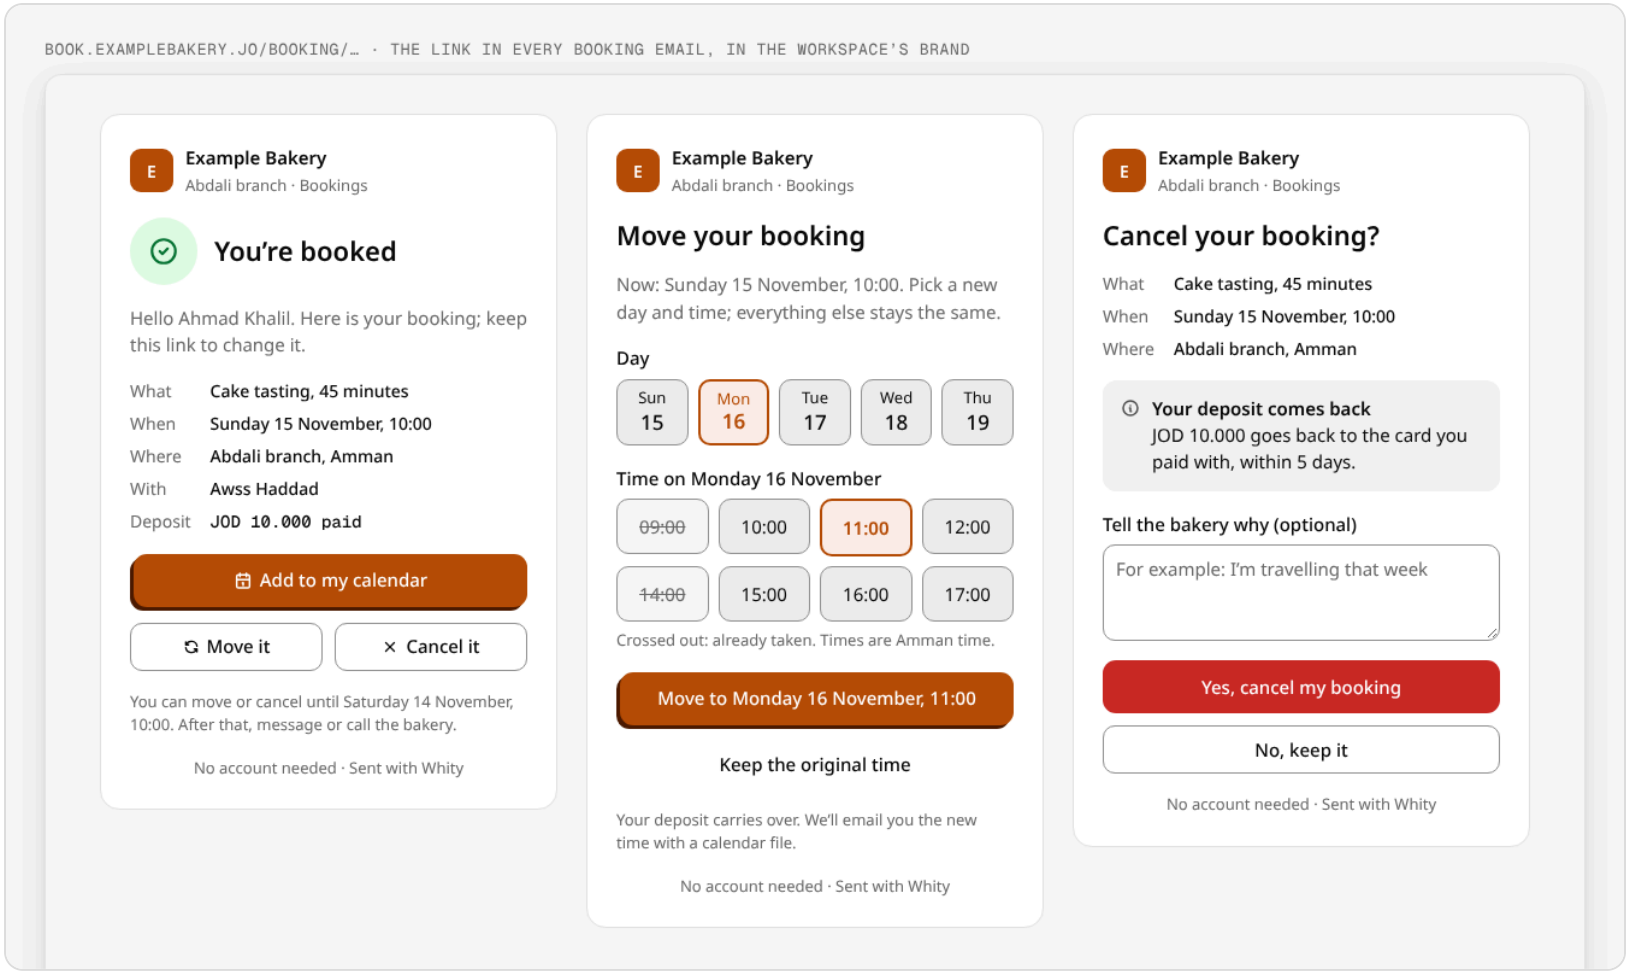

The link in every booking email, in the workspace’s brand

IN USE

Messages with customers

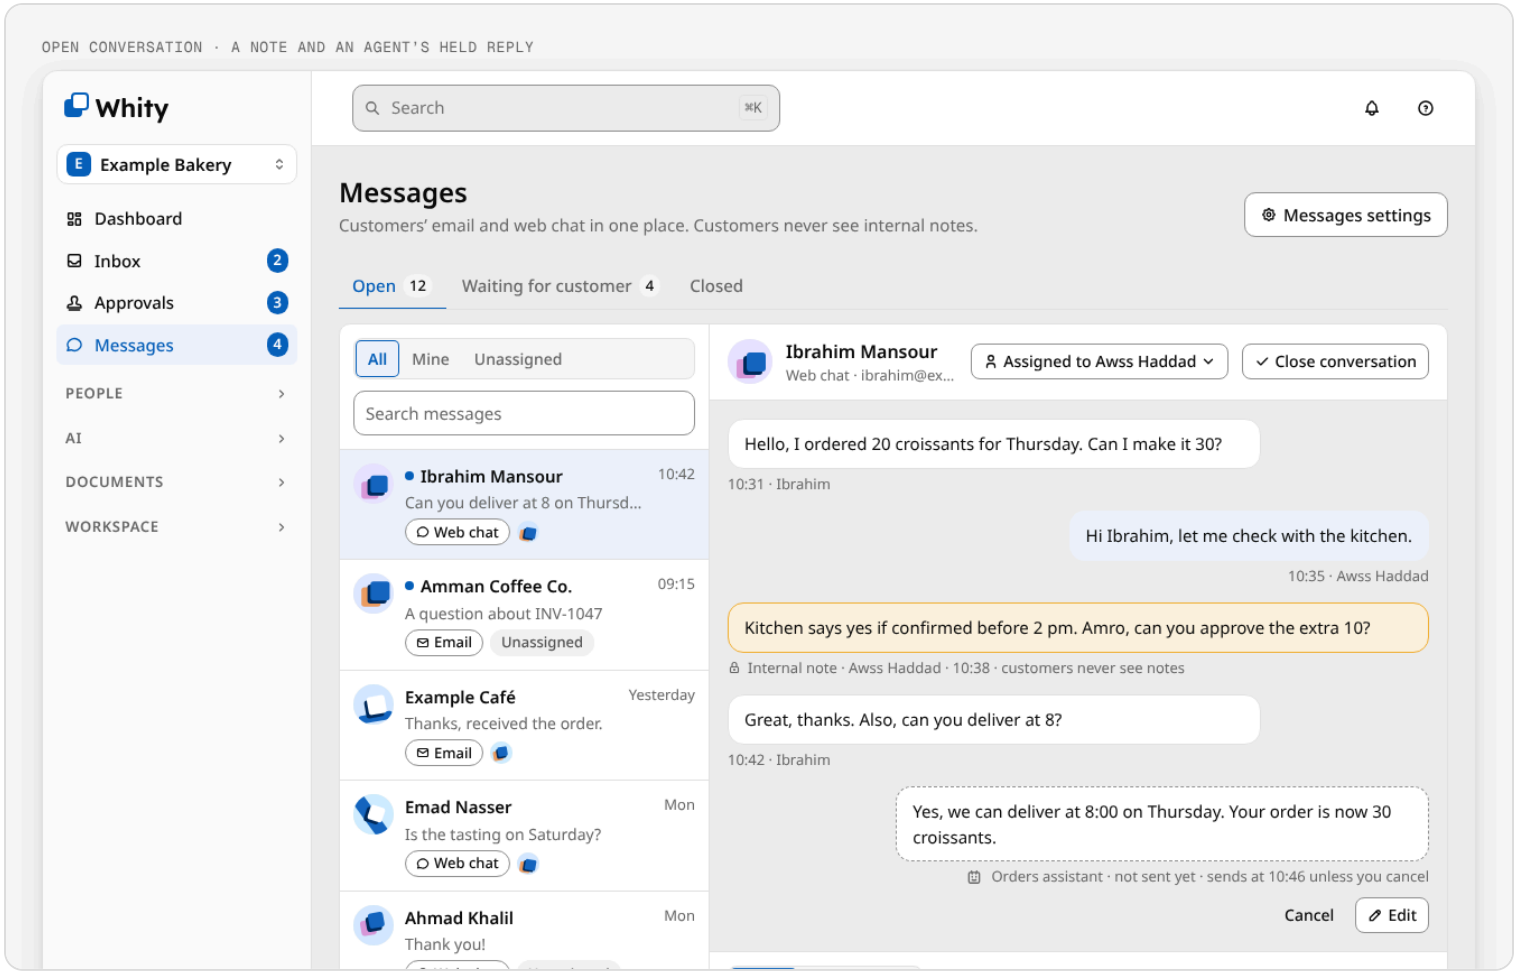

One inbox for email, WhatsApp and the chat box

SECTION 28

Roadmap

Where Whity stands against its aim — a full ERP, inventory and project management solution for small companies, with custom logic and low-code/no-code customization — and what comes next. Set on 8 November 2026 (R.1, R.2). The design is ahead of the build: about two-thirds of a small company's ERP and project tool is designed; the platform layer is built, the business modules aren't yet.

Near term is the low-hanging fruit: work that reuses what's already designed or built, small enough to finish soon, and that makes Whity usable by a first company sooner. **Long term** is everything else, in the order we expect to take it.

Near term

Design (designed 8 November 2026, version 3.2)

#	What	Why it's low-hanging
N1	**Contacts:** customers and suppliers as one record, with tags and a record page	The record-page pattern exists (section 21); invoices, purchase orders, appointments and subscriptions already need it
N2	**Custom fields on existing records** ("Studio lite"): add a field to items, contacts, tasks; it shows in lists, filters, document merge fields and flow conditions	The form builder's question kinds and settings are reused as field kinds
N3	**Import from a spreadsheet:** CSV or Excel with column matching, for contacts, items, opening stock and opening balances	The editor's label sheets already match CSV columns (section 18)
N4	**Receiving goods and supplier bills:** receive against a purchase order (with the phone's scanner), match the supplier's bill to the order and the receipt	Purchase orders, the reorder agent, the scanner and stock are designed
N5	**Waste and stock adjustments:** a reason, approval above a value, end-of-day waste	Reuses the stock count screens
N6	**Bank reconciliation:** match bank lines to invoices, bills and claims	The Bookkeeping assistant already sorts bank lines (MO.1)
N7	**Basic reports:** profit and loss, balance sheet, who owes us and whom we owe (by age), stock value	Read-only views of accounts that exist, with the chart and table components
N8	**The 80 mm thermal receipt**	A Whity Render template beside the 13 documents
N9	**Agent notifications by email and WhatsApp**	The last item left on the 2.9 app map; push is done (`TmPush`)

Cards: N1 `TplContacts`, `TmOpsMobile`; N2 `TplCustomFields`, `TmFinanceMobile`; N3 `TplImport`, `TmFinanceMobile`; N4 `TplReceiving`, `TmOpsMobile`; N5 `TplAdjustments`, `TmOpsMobile`; N6 `TplBankRec`, `TmFinanceMobile`; N7 `TplReports`, `TmFinanceMobile`; N8 `TplReceipt80`; N9 `TplAgentNotify`. The sidebar's Operations group gains Contacts and Reports.

Build (after A6 in the build plan)

#	Milestone	Why it's low-hanging
A7	**Quick wins on built pages:** the Approvals list with bulk approval for tier 1 (AQ.1); approval gating with request dates, identity checks and a second admin for two-step resets (AG.1); Delegations in names with I'm away (OR.1); the 80 mm receipt	The pages, data and permissions exist; these are changes to them
A8	**Contacts and import** (N1, N3)	One new record type; the column matcher exists
A9	**Custom fields** (N2)	Extends existing records rather than creating a new engine
A10	**Tasks and boards on Taskaat** (T.1–T.4)	Taskaat is the engine and speaks MCP; Whity builds the pages and the link, with Taskaat's team
A11	**Receiving, waste and bank** (N4–N6)	Purchase orders, stock and the Bookkeeping assistant exist
A12	**Reports and agent notifications** (N7, N9)	Read-only views; notifications reuse push's rules
W1–W5	**The websites** (section 29): whity.dev, health, id, brand, docs	Static pages are ready to port

Long term

In expected order. Studio comes first because the business modules should be built on it, so customers can extend every module without code.


#	What	Status
L1	**Studio:** custom record types, relations, list, board and calendar views, formulas, validation, a page builder from the plugin renderer's blocks	To design; the foundation for L3–L7
L2	**Flows engine** (FL.1): triggers across modules, people and agent steps, conditions, waits; code steps in a sandbox for custom logic; test runs and versions	Designed (section 27); to build
L3	**Sales:** leads and pipeline, sales orders, **point of sale** (working offline), price lists, deliveries	To design
L4	**Inventory and production:** stock, transfers, counts, recipes and batches (designed); valuation (average or first in, first out), unit conversions, production planning, serial numbers	Partly designed
L5	**Accounting:** the light accounting of MO.1 (designed); closing a period, fixed assets, several currencies, the accountant's export formats	Partly designed
L6	**HR and payroll:** employee files, shifts and attendance, running payroll, social security contributions	To design
L7	**Projects:** projects with budgets, time tracking, a timeline, invoicing from time or milestones (with what Taskaat offers)	To design with Taskaat
L8	**The 3.1 modules:** chat with people and agents, meetings, appointments and the booking page, applications, subscriptions a tenant sells, money and expenses	Designed (section 27); to build
L9	**Whity mobile** (Flutter)	Designed (section 26); to build
L10	**Reporting:** a report builder, custom dashboards, scheduled reports	To design
L11	**Integrations:** API and webhooks in the interface, banks, payment gateways, online shops, WhatsApp Business	To design
L12	**Platform:** several companies under one owner, several currencies, test and live versions of customizations, packaging customizations as plugins for the Marketplace, industry packs (bakery, clinic, trading)	To design
L13	**Live collaboration** in the document editor: cursors, presence, version history (E.3)	Designed as "after M8"

How this changes

Near-term items move into the build plan as milestones when their design is done; long-term items move to near term when their dependencies are in. Each change is recorded in the decision register.

IN USE


Contacts

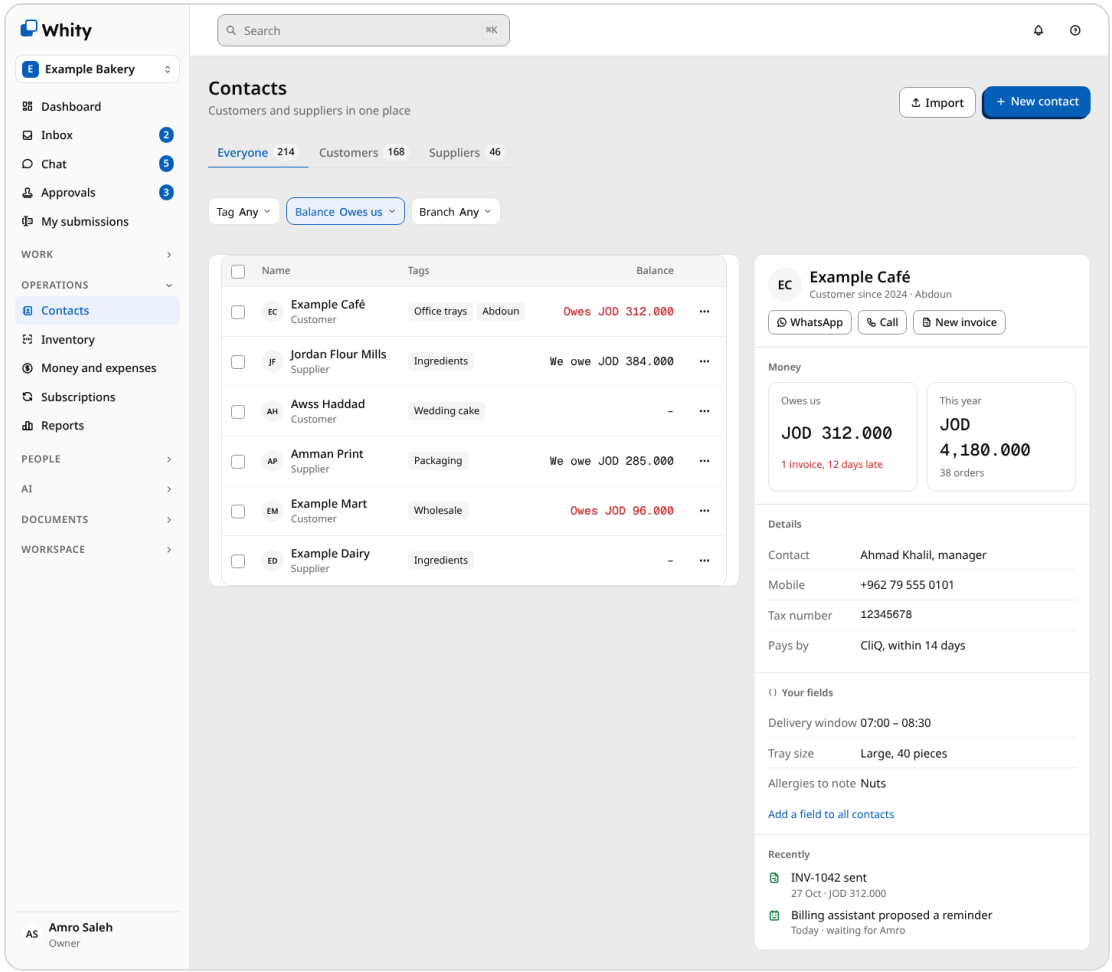

Contacts

IN USE

Bank reconciliation

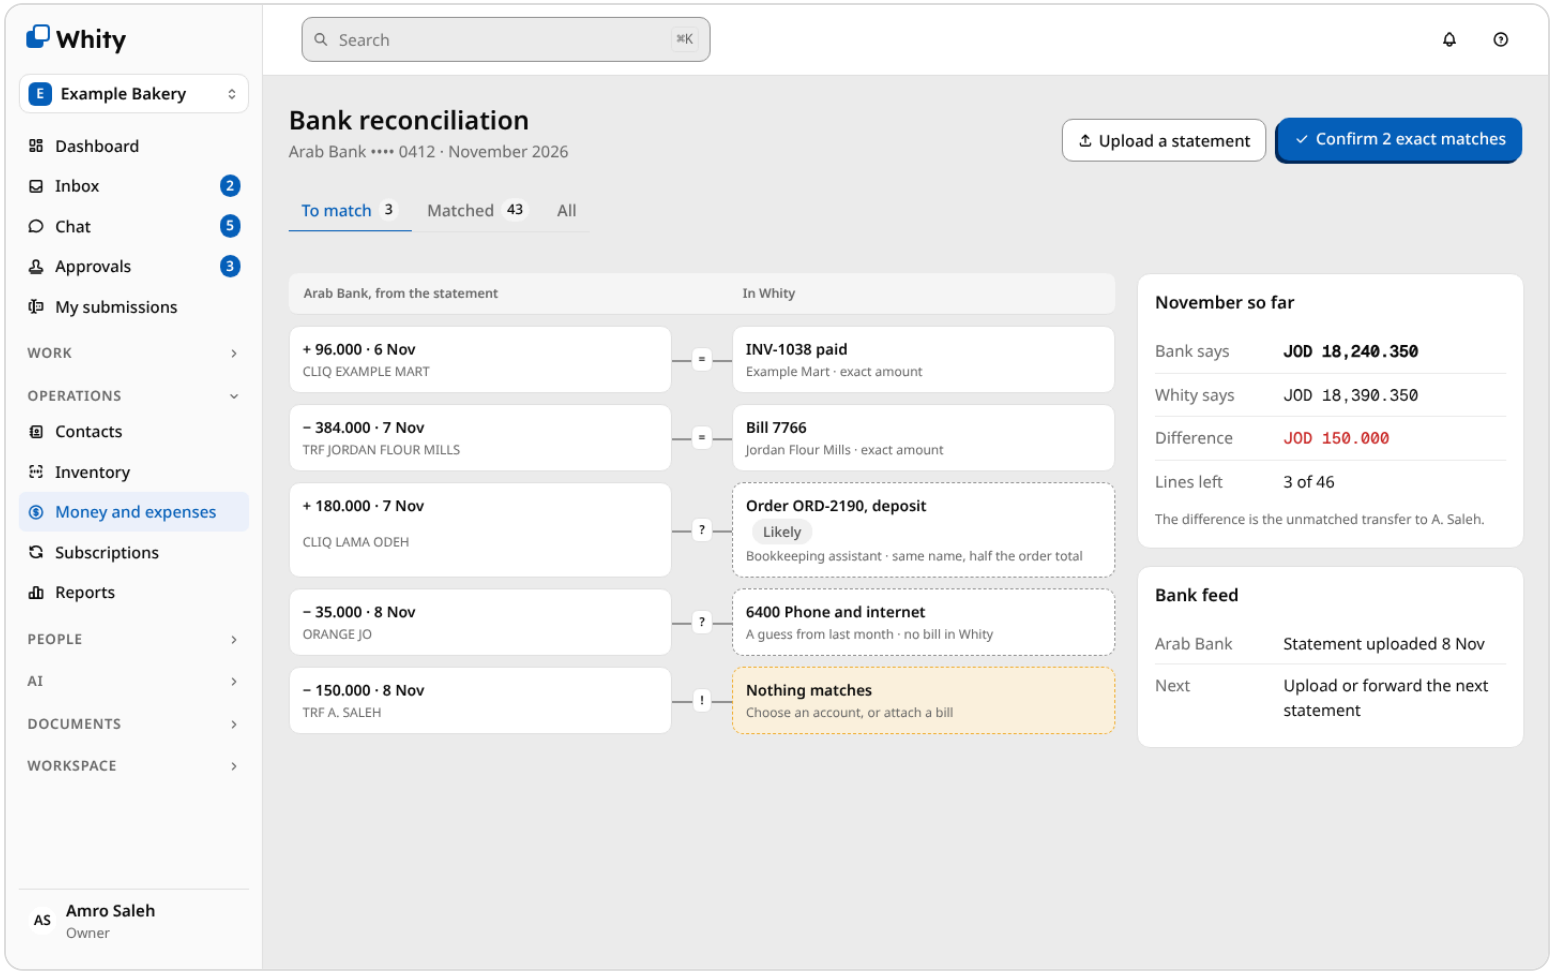

Bank reconciliation

SECTION 29

Websites

The public Whity sites, redesigned on the 3.x brand (WS.1–WS.3, 8 November 2026). Each is drawn as a design-system card (group **Websites**) and delivered as build-ready static pages in English and Arabic (the handoff package's `sites/` folder).

Who each site is for

Site	For	What changed
whity.dev	Companies first, then builders (WS.1)	Was written for developers. Now it opens on what Whity does for a small company (one place, agents prepare, you approve), and offers a second, quieter door to builders under the hero and again as a blue "For builders" section
brand.whity.dev	Partners, press, builders, the team	One page with a side index: the mark, downloads, colour, type, the plane, agents, voice, Arabic, using the name, white-label
health.whity.dev	Customers checking if something's wrong	One plain sentence on top ("2 parts of Whity aren't working"), every part with 90 days of history, what's happening with the next update time, updates by email or RSS
id.whity.dev	Everyone signing in	Sign in (email, passkey, Apple, Google), approving on the phone with a number to match, and the account page (workspaces, sign-in and security) — M.26–M.33
docs.whity.dev	Both	Search first, then the same two doors: Using Whity (companies) and Building on Whity (builders); an article layout with a side index and "on this page"

The home page, top to bottom

1. **Hero** (WS.6): "Your company's work, in one place. Agents prepare it. You approve it." with Start free and Book a demo. Beside it, the web Home (Waiting for you, with agents' proposals dashed) and, in front of it, the phone with the same proposal and its Approve button. On phones only the web Home shows. Book a demo opens Whity's own booking page (`TplBookingPage`): 30 minutes with the team, in Arabic or English.
2. **Second door:** "Building software for companies? Whity is open source →", small and dashed, under the buttons.
3. **What it does** (WS.7): four large cards for what owners care about most (invoices and money, stock and recipes, approvals, documents and signing), each with a small screen and a link to its own page; then a compact row for tasks and boards, chat, appointments and making it yours (linking to the docs for now).
4. **Agents** (WS.8, LT.2): one proposal visitors try themselves (Approve sets it down, Undo plays it back) beside the three steps, which light up as it goes; then "Agents never".
5. **Works locally** (WS.9, WS.17): "Local where it matters": Arabic and English in both directions, your tax system's e-invoicing (Jordan's JoFotara first), local payments, cards and cash (like CliQ in Jordan), WhatsApp, and your currency to the right decimals, each with a small animation, beside a receipt visitors switch between English and Arabic.
6. **Your name on it:** the white-label promise, with the brand animation (the workspace's sheet sets down on Whity's platform) and "Try a colour" buttons that recolour it.
7. **Plans** (BM.3–BM.5): Free (5 people, 500 customers a month, JOD 0), Team (25, 5,000) and Business (100, 25,000) at `[currency] [price]` (the currency comes from the backend; the built-in copy says JOD); a line on dedicated hosting, your own server and reselling (BM.2, BM.10); then the four promises (BM.11).
8. **For builders** (WS.11): a terminal that types the real install commands (from whity.dev/install) with Copy and Play again; open source (AGPL core, MIT SDK), build apps and agents can run it (MCP), each with a small animation; and one line for agencies linking to a partners page. Install takes three commands today; a single-line installer would make this section stronger.
9. **Questions** (WS.12): eight straight answers, always open, then "Book 30 minutes with the team". **Final call:** on its own sheet on the plane, with four ticks. **Footer:** every Whity site, live status from `health.whity.dev/status` (`{"status": "ok" | "degraded" | "down"}`; a plain link if it doesn't answer in 3 seconds), the four promises and Back to top.

Rules

- **Whity is a global tool (WS.17).** The sites never say Whity is built for companies in Jordan or the region. Jordan appears only as where Whity comes from (built in Amman, Amman time for calls) and as the first example of a local feature ("Jordan's JoFotara first", "like CliQ in Jordan"). Data is "stored in the EU" (WS.18), with no GDPR claim; inside one country means a dedicated installation there for a fee, or the company's own server. Example companies and amounts in screens may stay Jordanian; they are examples.
- Same tokens, fonts and icons as the app; the sites add one stylesheet (`site.css`, classes `s-*`). The only scripts are `plans.js` and the Lottie player (`whity-lottie.js` with lottie-web's light build); every page works without them.
- 17px body text, 48px buttons, high contrast: the readers are often 50+.
- The plane (hard offset, down and to the left) only under the one main button and the hero sheet; it does not mirror in Arabic, like the mark.
- Arabic pages are fully mirrored under `/ar/`; the name stays "Whity" in Latin letters; numbers stay Western digits.
- Example companies (Example Bakery, Amman Coffee Co.) and the Whity team as the people (WS.4); placeholders for prices and limits. **Every feature claim is checked against what has shipped before launch.**
- The status page runs apart from Whity so it stays up when Whity doesn't, and says plainly what isn't working.

Small details (WS.10)

- The hero sets down once on load: the web Home lands on its plane, then the phone slides in. Pressing Approve on the hero's phone updates the web Home behind it (the count drops, the row turns solid), and Undo puts it back.
- Sections ease in once as they come into view (10 px, 400 ms); nothing stays hidden for more than 4 seconds.
- The main button lifts 1 px and its plane grows from 3 to 5 px on hover; clickable cards lift onto the plane; informational cards never move.
- The nav gets a line under it once the page scrolls.
- All of it is in `whity-site.js` and `site.css`; none of it runs when less motion is asked for, and every page reads and works without it.

Mega footer (WS.14)

Every whity.dev page ends with the same footer, top to bottom:

1. **Who we are:** the reversed logo, "The platform a company's systems sit on. Open source, for companies anywhere.", live status from health.whity.dev, the other language, and a colour switch (same as my device, light, dark). The choice is kept in the browser (`whity.theme`); with nothing saved the page follows the device.
2. **Talk to the team:** thirty minutes in Arabic or English, the time in Amman now (`Intl`, Asia/Amman, updated every 15 seconds), Book a call and Start free.
3. **Everything Whity does:** eight white tiles (the four module pages, then tasks and boards, chat, appointments, make it yours, which link to the docs until their pages exist). When the row comes into view the plane draws out under it and the tiles set down one after another, 70 ms apart.
4. **Links:** Product, Company (About, Partners, Contact, Brand), Builders (Docs, Install, GitHub, Plugin SDK, llms.txt), Trust (Security, Status, Privacy, Licence, Trademark), Your account.
5. **The name:** a giant, faint "Whity" whose letters rise onto a dark plane when it comes into view. It is a picture of the word, hidden from screen readers; the logo itself is unchanged.
6. **Legal line:** © 2026 Whity and the trademark line, the four promises, Back to top.

The band is #0a3d74 with the blueprint grid (#071d38 in dark mode). Text is at least 14.5 px, links 16 px. A soft light follows the mouse on computers only. Everything is in `sitemods.mega_footer`, `site.css` and `whity-site.js`; if the scripts don't run, everything shows in its final place.

Install (WS.20)

`whity.dev/install`: "Run Whity on your own machine, in one line." with the terminal (copy, types once), a note to read the script first, the five steps the line takes, the manual steps from the README with the line's options, and where next (Whity Cloud, the SDK, GitHub issues). The home page's builders terminal shows the same one line.

The installer script (`https://whity.dev/install.sh`), for the team to write

1. Detect the system (macOS, Linux, Windows under WSL); anything else: say so and link to the manual steps.
2. Check `docker` (and that it's running) and `node`; if either is missing, print one plain line with where to get it, and stop **without changing anything**.

3. Clone `https://github.com/whity-org/whity-core.git` into `./whity-core` (or `--dir`); a `--version` checks out that tag.
4. Run `make setup` (Docker Compose: FrankenPHP and PostgreSQL 15, migrate, seed; `--empty` skips the sample data).
5. `cd web && npm install && npm run dev` in the background; wait for http://localhost:3000.
6. Create `admin@localhost` with a one-time password, print it, and open the browser.

Each step prints one line as it starts and a ✓ when done; any failure prints what went wrong and the command to retry. Never asks for `sudo`. The terminal output on the page is exactly what the script prints.

Privacy (WS.21)

`whity.dev/privacy`: "Privacy, in plain words." Six cards (what we keep, why, where, who can see it, how long, what you can do), four more answers (your customers and staff, cookies, agents, changes), and the full policy's place, marked "To be added", for the lawyer's text (numbered sections, a table of contents, 68 characters a line at most). Numbers in brackets (`[30]` days to delete, `[35]` days for backups) are to be decided.

Licence (WS.22)

`whity.dev/license`: "Free to use. Open to read." What you can do, what you must do, and the plugin exception; a "Can I...?" table (run it unchanged, run it under your brand, a closed-source plugin, change Core and offer it online, use the name); the trademark; and links to the licence text on GitHub and gnu.org. "This is a guide, not legal advice."

404 (WS.23)

`whity.dev/404`: the `not-found` animation, "This page isn't here.", and five ways on. Serve it for any unknown path, in the visitor's language folder.

Contact page (WS.19)

`whity.dev/contact` (Arabic under `/ar/`):

1. **Hero:** "Talk to us." "Book a call, send a message or email the right address. We read everything." and the time in Amman.
2. **Who are you?** Four choices as tabs (arrow keys move between them, a soft highlight slides to the chosen one), each with one line and its own buttons: - *I'm new to Whity:* Book a call, Write a message, hello@whity.dev. - *My company uses Whity:* Open Whity (Help is in its menu), Read the guides, support@whity.dev. - *I run Whity Core myself:* Open an issue on GitHub, Read the docs, Install guide. - *I'm an agency or host:* Book a partners call, See Partners, partners@whity.dev. Choosing "agency or host" also sets the form's topic to Partnering. Without scripts all four show one under another.
3. **Write to us:** topic chips (A question, A demo, Partnering, Something else), your name, company (optional), email or phone, your message, Send message. "We only use this to reply to you." Missing fields get a plain sentence under them and the first one is focused. While sending the button says "Sending…"; on success the form is replaced by a green tick that draws in and "Thanks, Ahmad. Your message is with us."; on failure the message stays and hello@whity.dev is offered.
4. **The right address:** hello@ (questions, anything else), support@ (companies already using Whity), partners@ (agencies and hosts), security@ (with How to report), each with Copy.

No reply-time promise.

Contact form contract (v1)

`POST https://app.whity.dev/api/public/contact`, JSON (or a normal form post when scripts are off: reply with a redirect back to `contact.html?sent=1`):

```
json { "topic": "question | demo | partners | other", "name": "Ahmad Khalil", "company": "", "contact": "ahmad@example.com", "message": "…", "lang": "en | ar", "website": "" }
```

`website` is a hidden trap field: if it has anything in it, drop the message quietly. Answer `2xx` when the message is saved (it lands in the Whity team's inbox in Whity); anything else shows the failure line. Allow `https://whity.dev` in CORS, rate-limit by address, and never send the message back in the response.

About page (WS.16)

`whity.dev/about` (Arabic under `/ar/`), top to bottom:

1. **Hero:** "We kept building the same system. So we built it once, and opened it.", Start free and Read the code. Beside it, three cards ("Client 1, 2, 3", each with invoices, stock, approvals, documents, sign-in) fan out under "The same system, built again for every client", then slide together into one "Built once" card that lands on the plane: "One base, open for everyone". Pure CSS, plays once on load; people who ask for less motion see the end state.
2. **Facts:** started 2026; built in Amman, Jordan (where Whity comes from, not who it's for); open source; Arabic and English.
3. **What we promise:** the four promises (BM.11).
4. **A note from the founder:** two short paragraphs, signed Amro K. Saleh, Founder, with initials instead of a photo.
5. **Final call:** Start free or Book a call, then the footer.

No street address and no registered company name until there is one.

Partners page (WS.15)

`whity.dev/partners` (Arabic under `/ar/`), top to bottom:

1. **Hero:** "Build your business on Whity.", Book a call and Ways to work with us. Beside it, a sign-in page on the plane that visitors make their own: they type their agency's name (the address becomes `id.<name>.jo`, the initial and the "Sign in to" line follow) and pick one of four colours. The card sets down again after each change. "This is what your clients see. Whity's name doesn't appear anywhere."
2. **Four ways to work with us:** sell it as your own (agencies), set it up for companies, build plugins, run it for clients (on-premises licence for regulated companies). Each with who it's for and three ticks.
3. **How it starts:** book a call, agree the terms, start with one client. The line between the steps draws on view and the steps arrive one by one.
4. **Our partners:** "None yet. We're looking for the first." with four empty slots, the first marked "Could be you".
5. **Questions:** what it costs to join (nothing; terms on the call), whether clients see Whity (no), whether Core needs a partnership (no), where data is kept.
6. **Final call:** "Let's talk about your clients", Book a call (`app.whity.dev/book/whity/partners`).

Terms are contact-based for now: the page shows no partner price or revenue share (BM.10) until they're set.

Security page (WS.13)

`whity.dev/security`: a plain promise with Report a problem and Read the code; six areas, three ticks each; "What we don't have yet" (no certifications or outside audits so far, said plainly); how to report (email security@whity.dev, keep it private until fixed, we reply and keep you posted, credit by name with permission), a "Thank you" list that starts empty, and `/.well-known/security.txt`. A "Where your data is" block (WS.18) says "Hosted in the EU" and lists the providers: EU servers for the servers and database (provider not named), Cloudflare R2 for files (EU), Cloudflare for backups (EU), Cloudflare for domains and connections (worldwide network, stores nothing).

Module pages (WS.7)

One page per main module at `whity.dev/money`, `/stock`, `/approvals` and `/documents` (Arabic under `/ar/`), all from one template:

1. **Hero:** a breadcrumb back to What it does, the module's name, a one-sentence promise, Start free and Book a demo, and a screen of that module on the plane.
2. **What you can do:** three cards, each with a short paragraph and three ticks.
3. **Agents:** two dashed proposals an agent would prepare in this module, with Decline and Approve.
4. **Works with:** the other three modules.
5. **Questions:** three plain answers, including the awkward ones (signatures and the law, the tax system being down).
6. **Final call:** "Free for up to 5 people", then the footer.

Screens are drawn in HTML and CSS, not images, so they stay sharp, translate and follow the theme. Pages for tasks, chat, appointments and customising come later, from the same template.

Plans come from the backend (WS.5)

The plans on whity.dev (prices, limits, features, which plan is highlighted, the dedicated-hosting "from" price) are read from Whity's backend, so changing a plan in Whity changes the website without a redeploy.

Fallback, in order: live data → the last good copy saved in the visitor's browser (up to 14 days) → the plans built into the page. The page is complete without JavaScript; `assets/plans.js` only refreshes it. The built-in copy comes from the same endpoint when the site is built (`mksites.py` tries it first) and from `assets/plans.default.json` when the backend can't be reached. The section reports what it used in `data-plans-source` (`live`, `saved`, `built-in`).

Endpoint (to build in Whity Core): `GET https://app.whity.dev/api/public/plans`

- Public, no sign-in, read-only; built from the plan entitlement bundles (ADR 0010) plus a small marketing layer (tagline, features to show, highlight, order, visible on the website).
- Headers: `Content-Type: application/json`, `Access-Control-Allow-Origin: https://whity.dev`, `Cache-Control: public, max-age=300`.
- Answers within 3 seconds or the page keeps its built-in plans.


```
json { "version": 1, "currency": "JOD", "decimals": 3, "updatedAt": "2026-11-09", "plans": [ { "id": "team", "highlight": true, "name": { "en": "Team", "ar": "الفريق" }, "tagline": { "en": "For growing teams", "ar": "للفرق المتنامية" }, "price": { "monthly": "29.000" }, "limits": { "staff": 25, "customersPerMonth": 5000 }, "features": [ { "en": "Your own web address and sign-in", "ar": "عنوانك وصفحة دخولك الخاصة" } ], "cta": { "label": { "en": "Start free", "ar": "ابدأ مجاناً" }, "href": "https://app.whity.dev/register?plan=team" } } ], "dedicatedHosting": { "fromMonthly": "150.000" } }
```

Rules the page checks (anything else is ignored and the fallback is used): `version` is 1; 1–4 plans; prices are decimal strings in normal units (`"29.000"`, never minor units) or `null` for "not set" (shown as `JOD [price]`); limits are whole numbers; up to 6 features, each with an English text (Arabic optional, English is the fallback); links are `https://`. The page writes the limit lines itself ("Up to 25 people", "حتى 25 شخصاً") and shows numbers in Western digits. All text is inserted as text, never as HTML.


Cards: `SiteHome`, `SiteHomeAr`, `SiteModMoney`, `SiteModMoneyAr`, `SiteModStock`, `SiteModApprovals`, `SiteModDocuments`, `SiteBrand`, `SiteStatus`, `SiteId`, `SiteDocs`.

IN USE

whity.dev: the home page

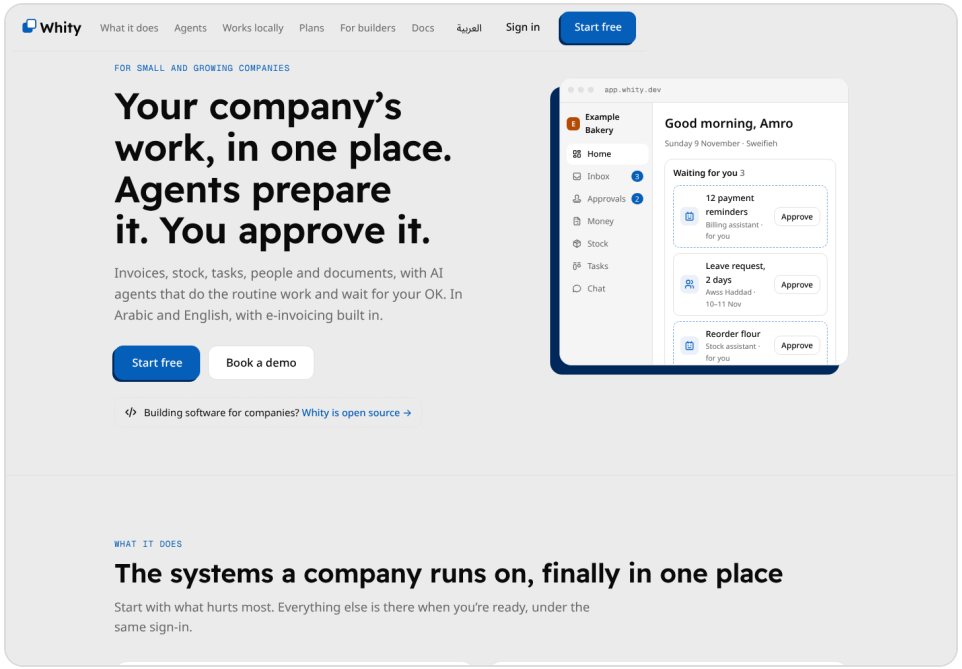


Home, English

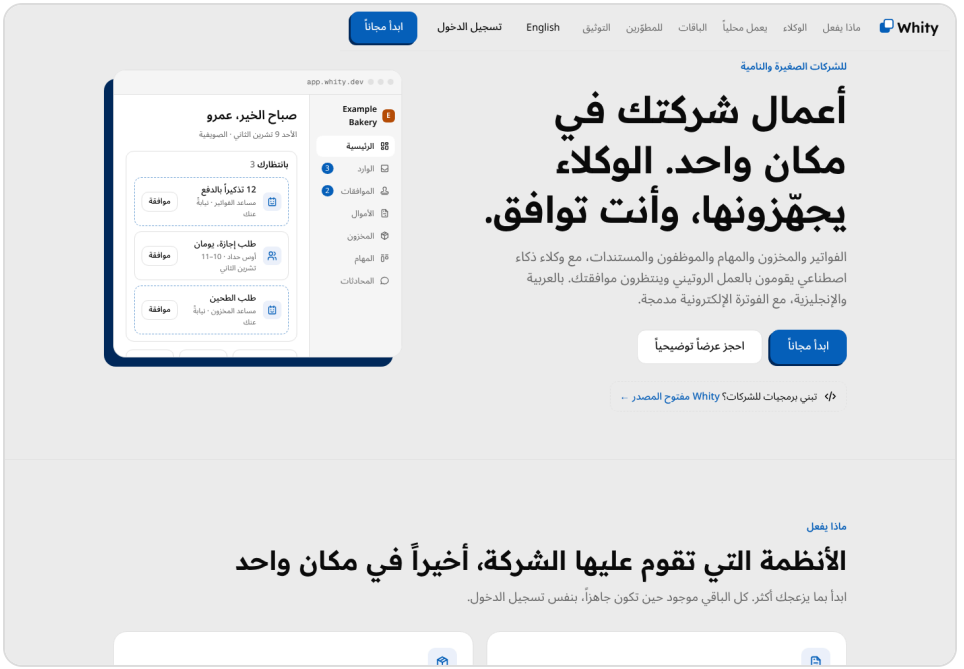


Home, Arabic

IN USE

A module page and the plans

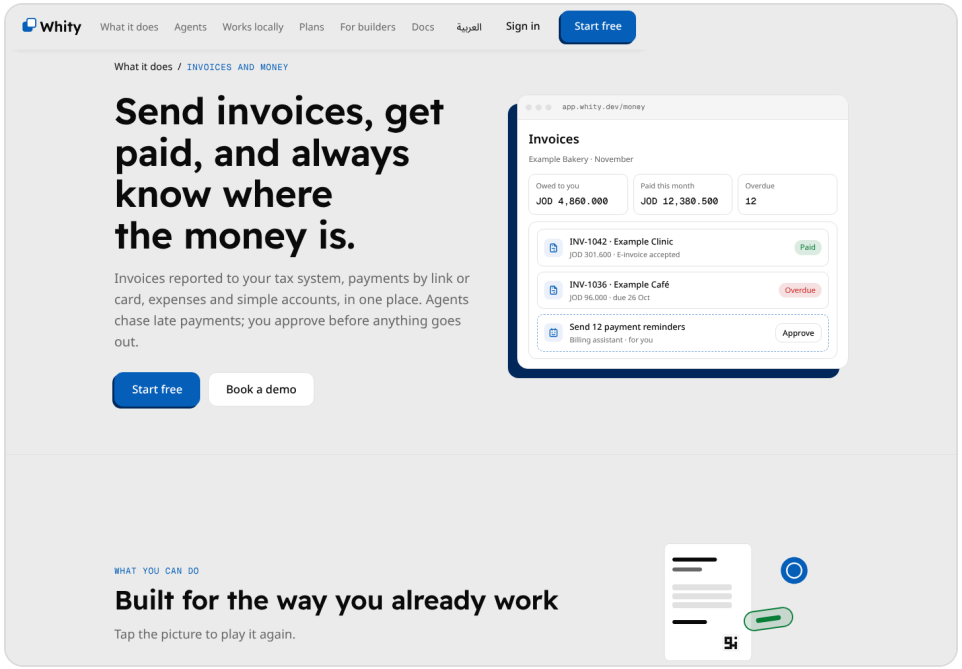


Money module page

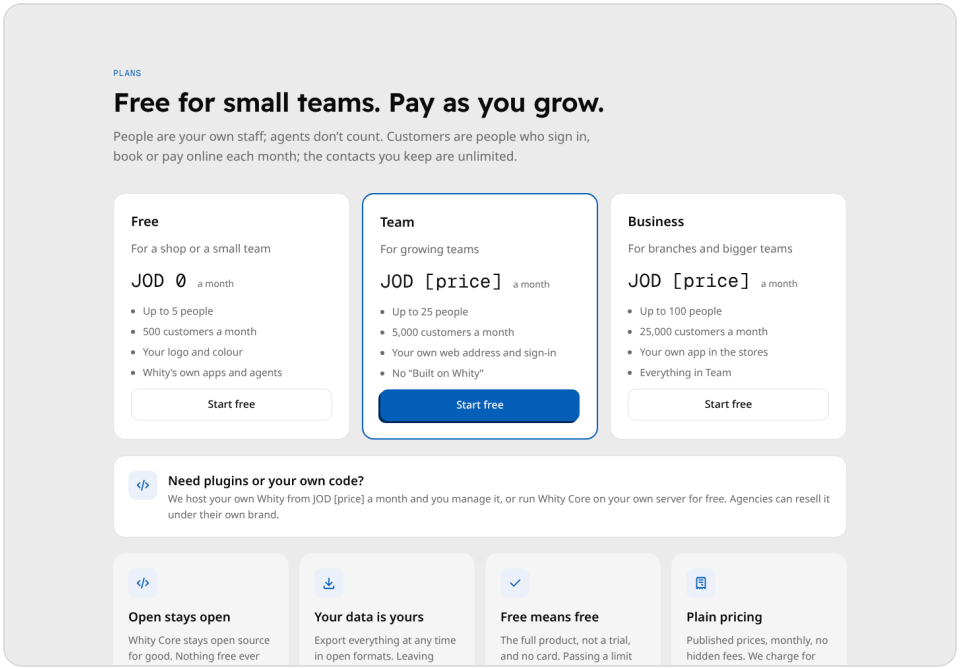

Plans, read from the backend

IN USE


The mega footer

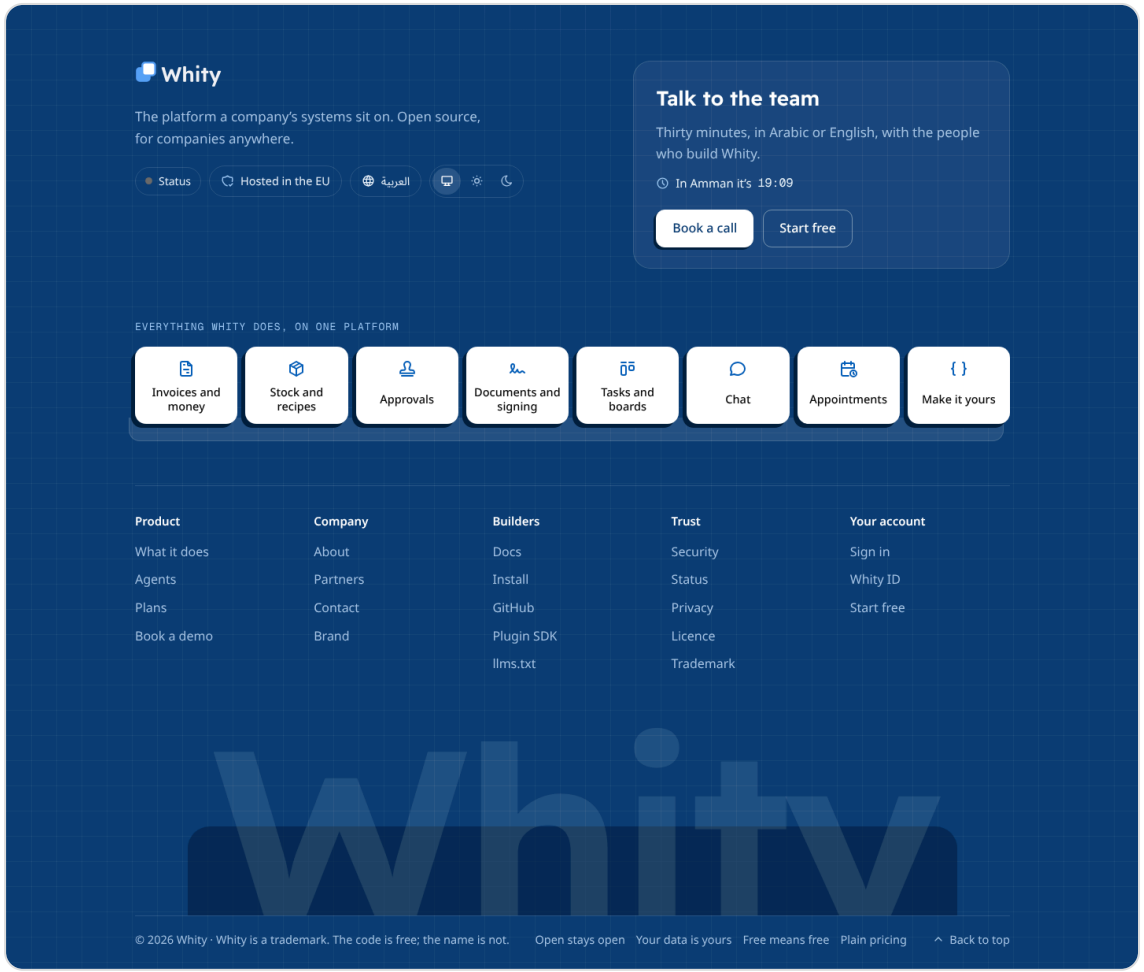


Every page ends here: status, colours, Amman time, the eight things Whity does, links, the name

IN USE


Partners, About, Contact

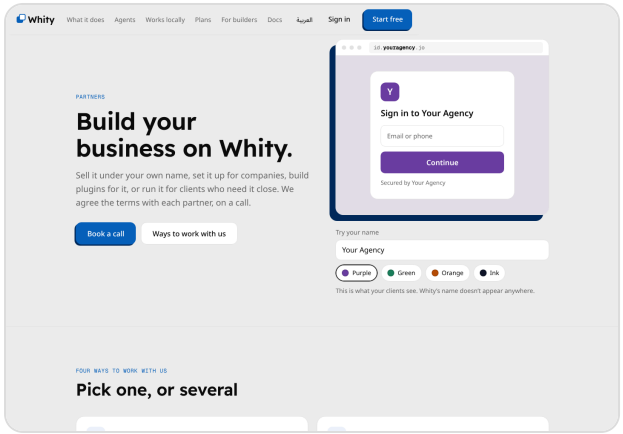

Partners: try your own brand

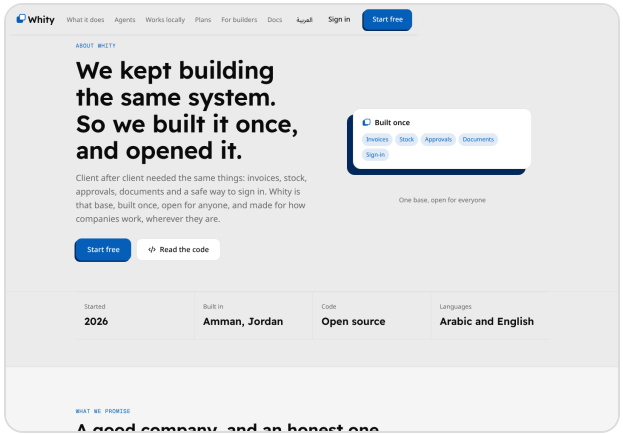


About

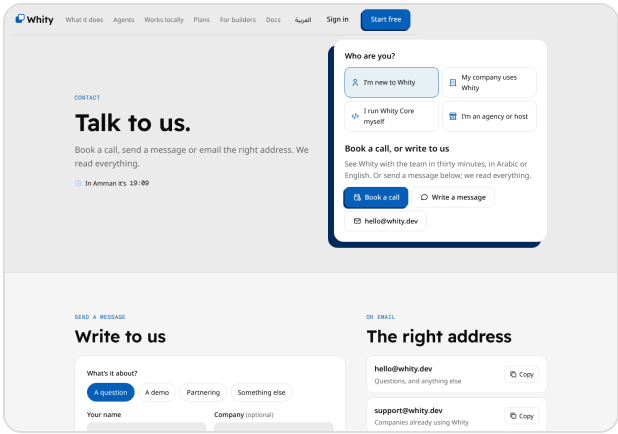


Contact: who are you?

IN USE


Install, Security, Licence

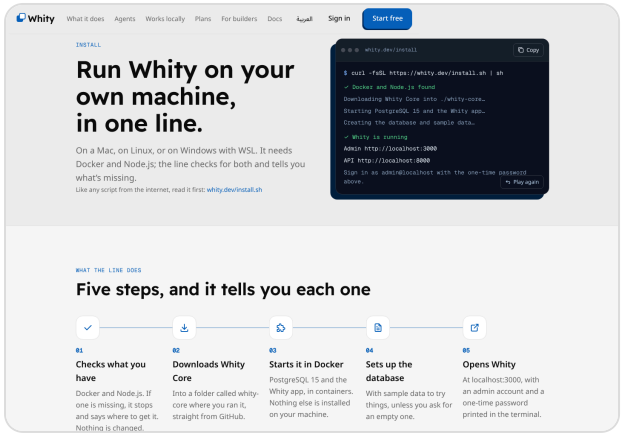

Install in one line

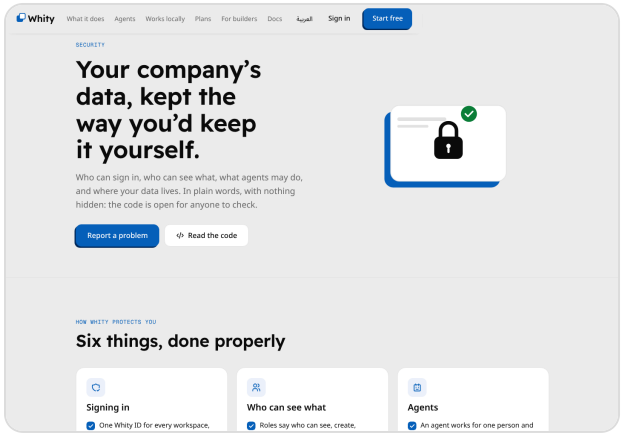


Security

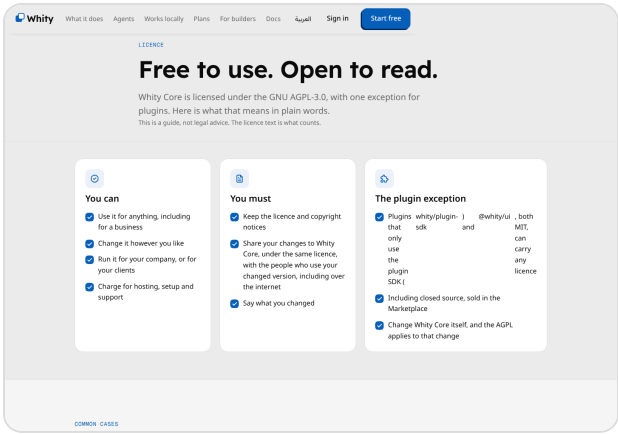


Licence in plain words

IN USE

Emails: account and money

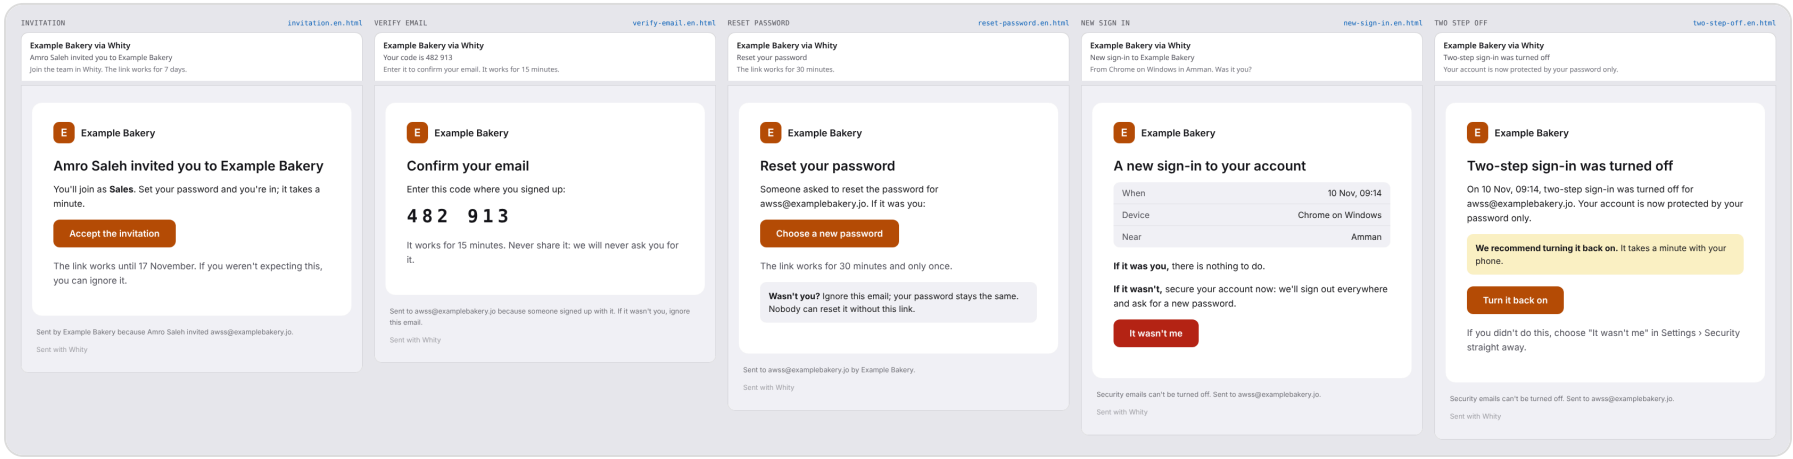


Account emails

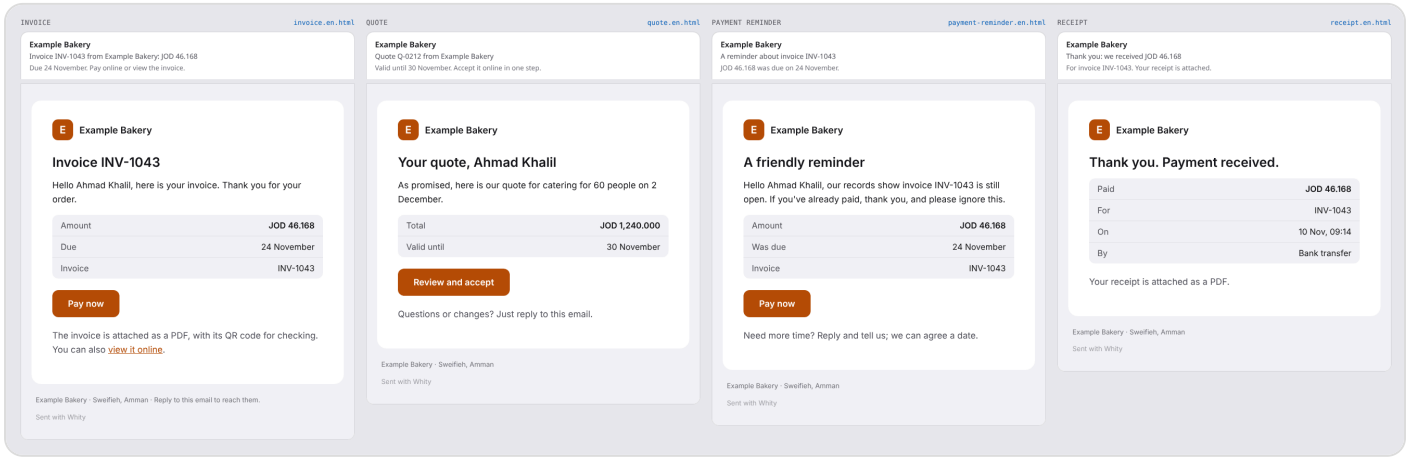


Invoice, quote, reminder and receipt, from Example Bakery

IN USE

Emails: bookings, forms and signing

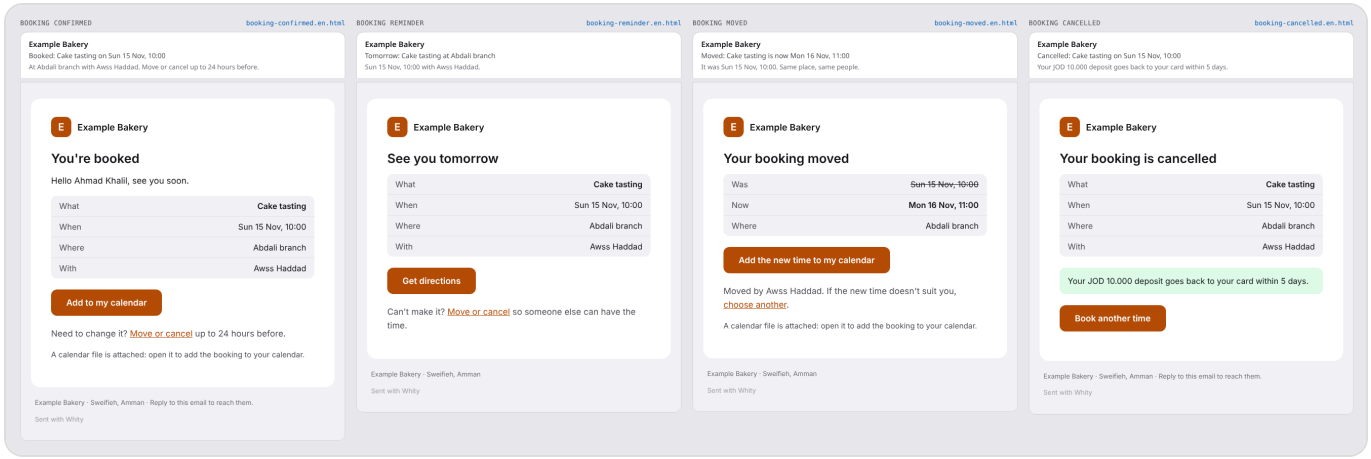


Confirmed, reminder, moved, cancelled

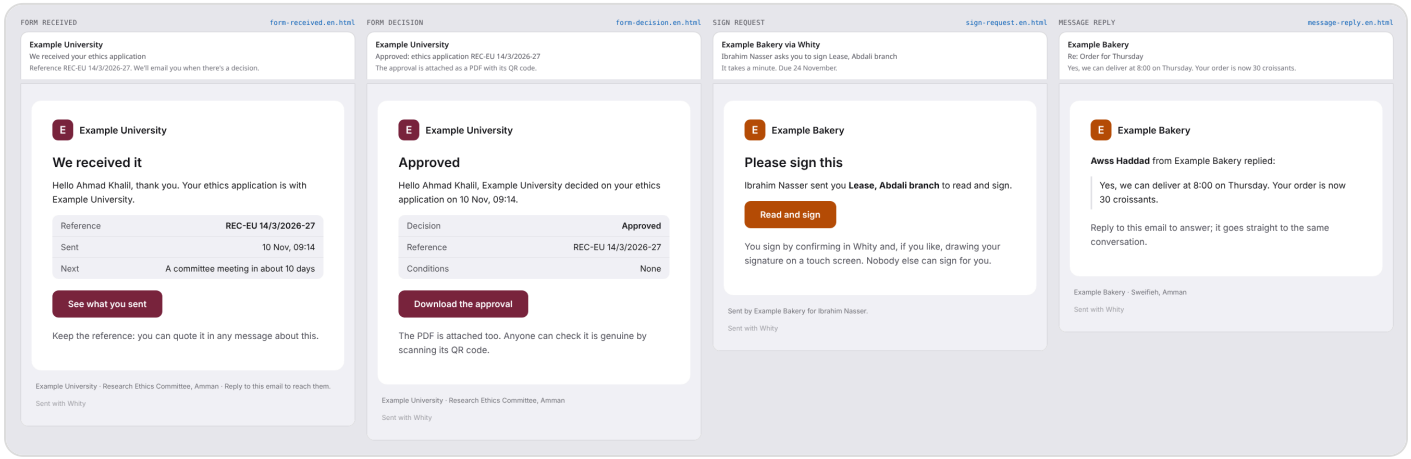


Received, decided, sign this, a reply

IN USE

Link previews, and the installer in a terminal

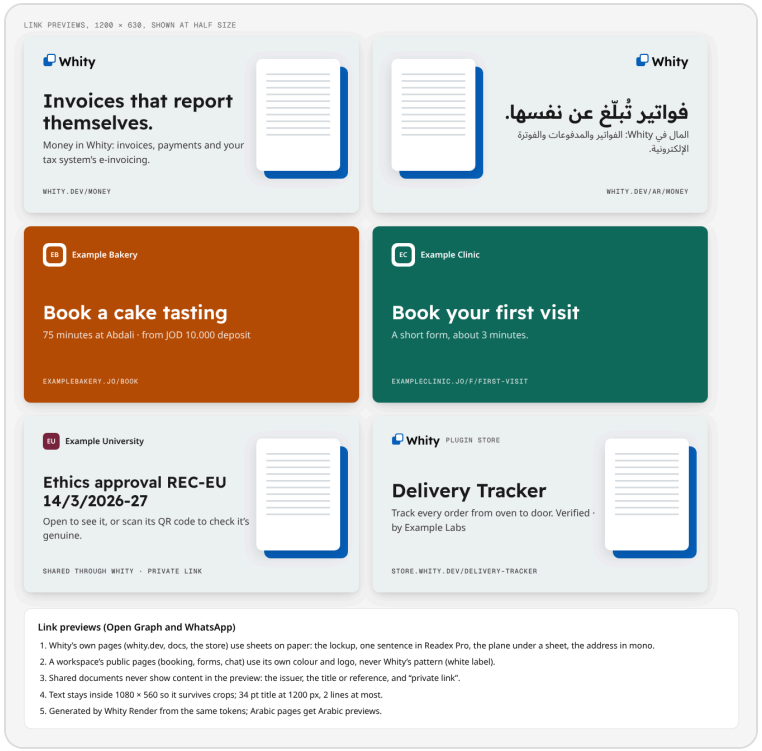

Open Graph images

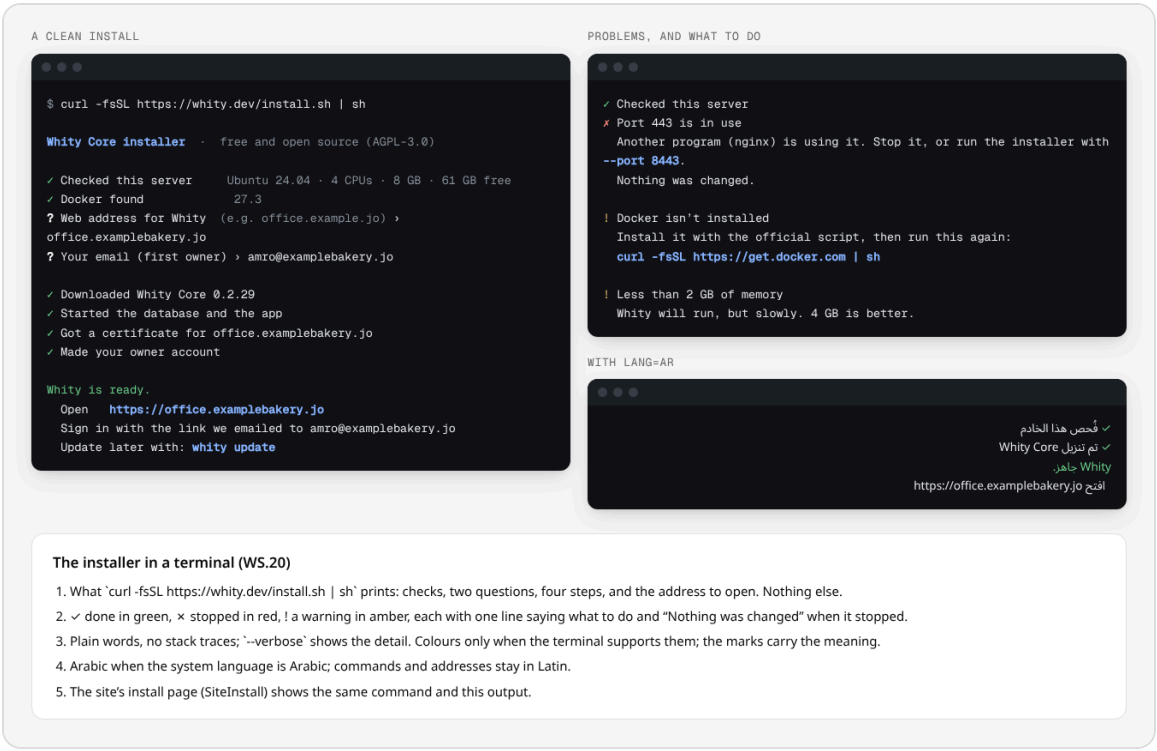

What install.sh prints

SECTION 00

Whity brand decision register

The brand is being rebuilt one stage at a time. A stage is locked before the next one starts. The decision board is the "Whity Brand Decisions" artifact. Production files were drawn from these numbers in stage 8, and the final guideline in stage 9. All nine stages are locked; a change now reopens the stage it belongs to and is recorded here first.

Procedure

1. Logo: locked 28 Oct 2026
2. Colour: locked 28 Oct 2026
3. Type, brand and UI: locked 28 Oct 2026
4. Shape, space, depth: locked 28 Oct 2026
5. Icons, motion, voice: locked 28 Oct 2026
6. Document components: locked 28 Oct 2026
7. UI components: locked 28 Oct 2026
8. Files and templates: locked 28 Oct 2026
9. Final guideline: locked 28 Oct 2026

Later versions: 2.1 P2 components · 2.2 Document editor · 2.3 Plugin store (locked 31 Oct 2026; S.9–S.12 added 2 Nov) · 2.4 Home (locked 2 Nov 2026) · 2.5 Page patterns and People (locked 2 Nov 2026) · 2.6 Forms (locked 2 Nov 2026) · 2.7 Ease of use and Documents and routing (locked 2 Nov 2026) · 2.8 AI and agents (locked 2 Nov 2026) · 2.9 Workspace, billing and settings (locked 2 Nov 2026)

Stage 1 · Logo (locked 28 Oct 2026)

The mark

The mark is built from one module, m, which is the width of the blue edge.

#	Decision	Locked value
1.1	Proportion	Both planes are 8 m square. The sheet is offset 3 m up and to the right (offset ÷ side = 0.375).
1.2	Corner radius	Outer radius 2 m, inner (window) radius 1 m, concentric. The ring is exactly 1 m at every angle.
1.3	Edge (the module)	1 m, which is 2px at 24px and matches the Tabler icon stroke.
1.4	Corner shape	Circular arcs, the same as CSS border-radius.
—	Canvas	12 m square, 0.5 m padding, live area 11 m.

Overall ratio: side 8, offset 3, radius 2, edge 1.

The wordmark

#	Decision	Locked value
1.5a	Weight	Readex Pro 600, outlined from the variable font.
1.5b	Letter spacing	−1% (−10 units per letter).
1.5c	Dot on the i	A rounded square. Its side equals the stem width and its corner radius is ¼ of the side.
1.5d	Letter corners	Outside corners are rounded to ¼ of the stem (0.36 m at cap height 8 m). Inside corners stay sharp.

The lockup

#	Decision	Locked value
1.6a	Word size	Cap height 8 m (equal to the plane side), x-height 6 m. The baseline is the platform's bottom edge and the cap line is its top.
1.6b	Gap	3 m from the sheet's right edge to the leftmost point of the W.
1.6c	Stacked lockup	The mark is centred over the word, 3 m apart, at the same cap height.

Small sizes and clear space

#	Decision	Locked value
1.7a	Small sizes	Pixel-fitted cuts below 24px. The 16px cut is side 11, offset 4, edge 2, radius 3 (in px). The 20px cut is side 14, offset 5, edge 2, radius 3.5. The master is used from 24px up, where m = 2px.
1.7b	Clear space	3 m around the live area.
1.7c	Minimum size	The horizontal lockup is at least 20px tall on screen (word cap height 13.3px) and 6 mm in print. The mark alone can go down to 16px.

Colourways and app icon

#	Decision	Locked value
1.8a	On dark	The platform and edge are #59a0f9, the window is white and the word is #f2f3f5.
1.8b	App icon	A Whity Blue tile with the mark in white and the window knocked out. The same tile is used for the PWA icon, the social avatar and large favicons.
1.8c	Mark in the tile	The tile is 18 m and the mark's live area is 61% of it (3.5 m margin).
1.8	Set	Exactly five colourways: colour, reversed, on brand, one colour ink, one colour white. The one-colour versions knock the window out.

Rules

- Every corner is ¼ of what it ends: the planes, the dot and the letter stems.
- Every gap is the step of 3 m: the offset, the lockup gap and the clear space.
- Every height in the lockup is a mark measure.

Stage 2 · Colour (locked 28 Oct 2026)

Brand and ground

#	Decision	Locked value
2.1	Whity Blue	#0961bb, oklch(0.5 0.16 255). White text on it is 6.1:1.
2.2	Blue on dark	#59a0f9, oklch(0.70 0.15 255). It is 7.4:1 on the dark page. Buttons on dark take a dark label.
2.3	Greys	Pure grey (chroma 0), so they stay neutral under any tenant colour.
2.4	Page ground	#eeeeee, oklch(0.95), under white cards.

Status colours

#	Decision	Locked value
2.5a	Structure	Each status has three tokens: a fill (with its own label colour), a text colour and a tint. Error and destructive are one token.
—	Success	Fill #0a7e3a with a white label. Text #087736. Tint #e0fae4. On dark: #5ac576, tint #14361d.
2.5c	Warning	Fill #f2b036 with a dark label (#1a1206, 9.7:1). Text #9a5505. Tint #fef4df. On dark: #f7b83d, tint #432f07.
—	Error	Fill #cc2827 with a white label. Text #c2181d. Tint #fceeec. On dark: #f66d67, tint #4f1a18.
2.5b	Info	Neutral: fill and text #555555, tint #f0f0f0. On dark: #aeaeae, tint #262626. Blue is kept for action and the brand.
—	Text contrast	Every status text colour passes 4.5:1 on both white cards and the #eeeeee page.

Contrast fixes

#	Decision	Locked value
2.6	Secondary text	#696969, oklch(0.52). It is 4.7:1 on the page and 5.5:1 on cards.
2.6	Input border	#929292, oklch(0.66). It is 3.1:1 on cards. Card borders and dividers stay light (#e5e5e5) because they are decorative.

Charts

#	Decision	Locked value
2.7	Categorical series, light	Main colour #0961bb, amber #f7a224, sky #91dbf2, plum #9d2398, green #35aa76, graphite #3a3a3a.
2.7	Categorical series, dark	#59a0f9, #f7a224, #91dbf2, #d25bcb, #53c48e, #858585. Graphite changed from #b7b7b7 on 28 Oct 2026 (version 2.1): beside green it was ΔE 5.3 under deuteranopia, below the 8 floor; #858585 gives 12.9 and stays above 3:1 on the dark card.
2.7	Contrast between series	The smallest OKLab difference is 0.08 under deuteranopia and protanopia.
2.7	Rules	Series 1 is always the tenant's main colour. Ordered (sequential) data uses lightness steps of the main colour.

Tenant colour rules

#	Decision	Locked value
2.8a	Contrast	Pick a white or near-black label, whichever passes 4.5:1. Lower the lightness only if neither passes. The admin sees what changed.
2.8b	Derivation	One colour goes in. The rest is derived from its hue: on dark at L 0.70 (chroma up to 0.15), the plane at L 0.30 (chroma up to 0.10), the tint at L 0.96 (chroma up to 0.03). Each can be overridden.
2.8c	Demo tenant	Burnt orange #b74c05, oklch(0.55 0.154 45), replaces teal in all partner and demo templates. Its derived set is #e97c47 on dark, #4f1c00 plane and #feeee7 tint. The user disliked the teal.

Stage 3 · Type, brand and UI (locked 28 Oct 2026)

Faces

#	Decision	Locked value
3.1	Brand headlines	Readex Pro 600 for the site, slides, document titles and social posts. Body text stays in Noto Sans. The product's own screens never use Readex Pro. Arabic document titles use its Arabic design (E.35).
3.2	Product, English	Noto Sans.
3.3	Product, Arabic	Noto Sans Arabic.
3.4	Codes, IDs, keys and code	Geist Mono.

Sizes

#	Decision	Locked value
3.5a	Product scale	Caption 12, text 14 (default, = shadcn text-sm), large 16, card title 18, section 20, page title 24 px. 11px is the absolute floor and is used only for counters and badges.
3.5b	Brand headline scale	Steps of 1.25 from a 16px body: 16 · 20 · 25 · 31 · 39 · 49 px.

Weights and line heights

#	Decision	Locked value
3.6	Body and component text	400, line height 1.5 (Arabic 1.7).
3.6	Labels, buttons, tabs, table headers	500, line height 1.25 (Arabic 1.5).
3.6	Product titles	600, line height 1.25 (Arabic 1.5).
3.6	Key numbers	600, tabular figures, line height 1.2.
3.6	Brand headlines	Readex Pro 600, line height 1.1 for large and 1.25 for small.
3.6	Mono	Geist Mono 400 or 500, line height 1.5.
3.6	Other rules	No 700 in the product. Letter spacing is 0 except brand headlines (−1% to −2%) and uppercase labels (+6%).

Arabic rules

#	Decision	Locked value
3.7a	Size	Arabic is set at the same size as Latin (100%). The user chose this over the recommended 110%.
3.7b	Digits	Western digits 0–9 in every language.

Stage 4 · Shape, space, depth (locked 28 Oct 2026)

Round 1 (locked 28 Oct 2026)

#	Decision	Locked value
4.1	Density	Buttons and inputs are 36px tall (small buttons 28px for toolbars and tables). Table rows are 44px. Gaps between groups are 16px. Spacing stays on a 4px grid.
4.2	Corners	The ¼ rule: a control's radius is ¼ of its height (9px at 36, 7px at 28). Cards are 12px and dialogs 16px.
4.3	The plane	Used in three places: the main button, approved agent work and a hovered clickable card. It is a hard 3px offset down-left that lifts to 5px on hover and never mirrors in RTL. Waiting proposals stay dashed and flat.
4.4	Floating layers	Menus, popovers, toasts and dialogs use a soft two-layer shadow. The plane is never used for floating layers.

Round 2 (locked 28 Oct 2026)

#	Decision	Locked value
4.5	App shell	Sidebar 240px, collapsing to 56px. Reading pages (forms, settings) are capped at 1280px and centred. Tables and boards may use the full width.
4.5	Gutters and grid	Page gutters are 24px on desktop and 16px on phones. Cards have 16–20px of inside padding. 12 columns with 24px gaps.
4.5	Breakpoints	Tailwind's: 640, 768, 1024, 1280, 1536. The sidebar collapses below 1024 and becomes a drawer below 768.
4.5	Reading width	Forms at most 720px; text at most 68 characters per line.
4.6a	Cards	1px #e5e5e5 border, no shadow.
4.6b	Focus	A 2px Whity Blue ring with a 2px offset.
4.6	Tables	Horizontal lines only (#ececec). No zebra stripes and no vertical lines. Numbers are right-aligned in tabular figures. The header row is #f7f7f7.
4.6	Dividers	1px #ececec inside cards; 1px #e5e5e5 between page regions.

Stage 5 · Icons, motion, voice (locked 28 Oct 2026)

Icons and motion

#	Decision	Locked value
5.1	Icon set	Tabler outline. The agent icon becomes Tabler's robot face; today it is a plug.
5.2	Icon weight	Rendered stroke of 1.5px at 16px (stroke-width 2.25 on 16px icons) and 2 at 20 and 24px. 16px is the default beside 14px text; 20px in touch navigation; 24px in headers and empty states.
5.3	Motion timing	Fast 120 ms (hover, press), base 180 ms (state changes), slow 250 ms (things entering), on one ease-out curve, cubic-bezier(0.2, 0, 0, 1). Reduced motion shows the end state only.
5.4	Approve animation	Set down: the dashed edge turns solid blue and the plane slides in underneath, 200 ms. Undo plays it backwards.

Voice

#	Decision	Locked value
5.5a	English	Plain and direct. Address the reader as "you", use active verbs, and make buttons say what happens. No exclamation marks. "We" only on the website and in docs.
5.5b	Arabic interface	Simple Modern Standard Arabic in short sentences, reviewed by a native speaker.
5.6a	Agent messages	Describe the action: agent named by role, then who it acts for, then what it did or proposes. No "I", no feelings.
5.6b	Agent names	By role (Billing assistant, HR assistant). No human first names and no "Whity AI".
5.7	Errors	Say what happened and what to do. No apology, no blame, one next step. Technical detail and a copyable reference go behind "Details".

Words

Use	Avoid
agent, assistant (named by role)	AI employee, copilot, bot, magic
approve, ask first, allowed, scope	autonomous, hands-free, set and forget
platform, workspace, app	suite, solution, ecosystem, synergy
Buttons that name the action, such as "Issue invoice"	Submit, OK, Confirm, Proceed
Built on Whity	Powered by AI, AI-first

Other rules: - Sentence case everywhere. - Western digits, JOD with 3 decimals, dates as 27 Oct 2026 (27/10/2026 where space is short), 24-hour times.

Stage 6 · Document components (locked 28 Oct 2026)

These are the building blocks for everything Whity Render prints. They were shown on an A4 tax invoice for the demo tenant, Example Bakery (burnt orange).

The page

#	Decision	Locked value
6.1	Margins	16 mm on all sides of an A4 page, leaving 178 mm of content width. US Letter and A5 follow the same rules.
6.2	Letterhead	Tenant logo, address and tax number at the start side; title, number and date at the end side.
6.3	Tenant colour	Used on the document title only. Everything else is ink, so documents print and fax cleanly. A theme may extend it to headings (E.45, 31 Oct 2026).
6.4	Languages	Either language can lead, chosen per customer: Arabic with English labels (layout mirrors) or English with Arabic labels. Latin values inside Arabic are isolated with bdi.

Inside the document

#	Decision	Locked value
6.5	Type	Body Noto Sans 9.5 pt, labels 8.5 pt, title Readex Pro 600 at 22 pt, codes in Geist Mono.
6.6	Line-item table	A strong rule under the header and hairlines between rows. No zebra stripes, no grid.
6.6	Totals	End-aligned block 46% wide. Only the grand total is bold, with a 1.5 pt rule above. The amount is written in words under it in both languages (dinars and fils).
6.6	Numbers	Tabular figures, end-aligned, JOD to 3 decimals.
6.7	Footer	The JoFotara stamp, reference and "Page x of y" at the start side; the QR code ("Scan to verify") at the end side.
6.7	Continuation pages	A small running header (logo, number, "continued"), the table header repeated, "Carried forward" at the foot, and totals on the last page only.
—	Legal fields	Every legal field comes from tenant settings. Confirm the required invoice fields with an accountant and the JoFotara specification before shipping.
6.8	Document set	All four groups are in scope for stage 8. Sales: quote, invoice, receipt, credit note (the Tax invoice and the fiscal credit note, through JoFotara, are what Front Office adds; owner, 2 Nov 2026). Accounts: statement, payment reminder, delivery note. People: payslip, employment letter, leave approval. General: report, letter, purchase order. 80 mm thermal receipts come later.

Stage 7 · UI components (locked 28 Oct 2026)

Inventory

- 56 components in 8 groups: Foundations, Actions, Inputs, Navigation, Data display, Feedback and layers, Agents, Platform.
- 41 are P1: what the Front Office demo, approvals and account flows need.
- Each component is marked as already in the design system, already in packages/ui (restyle), or new.
- The full list is on round 1 of stage 7 on the decision board. It is the stage 8 build order.

Shared looks

#	Decision	Locked value
7.1	Secondary buttons	Outline: white with the 3:1 #929292 border. The main button is the only filled one and the only one with the plane. Ghost and destructive buttons are also available.
7.2	Inputs	Outlined, 1px #929292 on white, 36px tall, corner radius 9px.
7.3	Selected state	Tint: the derived tint (L 0.96) as the fill, with text in the main colour. Tabs are underlined in the main colour. No solid fill for the selected state.
7.4	Status badges	Tinted pills: the status tint as the background, with the status text colour.

Agent components and the data table

#	Decision	Locked value
7.5a	Proposal	Summary first: one line saying what will happen and how much, two examples, then "Show all" for the details. It always shows the permissions used and the undo window. Approve, Edit and Decline.
7.5b	Approvals inbox	One at a time: a queue of proposal cards ("1 of 4 waiting"). The user chose this over the recommended list with bulk approve.
7.5c	Undo	A 10-second toast with Undo, then Undo stays on the activity item for the tool's undo window (for example 30 minutes for email).
7.6	Table selection	A checkbox column. When rows are selected, a bar rises at the foot showing the count, the money total and the actions.
—	Actor chip	Shown on everything an agent did or proposes: the role name, the robot face and the person it acts "for". People get initials; the system gets the mark.
—	Proposal states	Waiting: dashed and flat. Approved: solid, on the plane. Declined: grey with the title struck through. Expired: grey with "ask again". Undone: dashed again with "undone by …".
—	Scope grant	Off, Ask first or Allowed for each permission. An agent never exceeds the person who granted it, and changes are logged.
—	Agent run status	Running ("Reading 48 invoices"), Waiting for approval, Done, Failed (with what to do next).
—	Data table	44px rows, sticky header, sort on click. A row opens a side drawer; the row menu sits at the end. Empty, loading (skeleton rows) and error states. A totals row for money columns.

Stage 8 · Files and templates (locked 28 Oct 2026)

Built 28 Oct 2026

- Design system v2.0 draft published: logo files, tokens and components rebuilt from stages 1–7.
- `Doc` component (Whity Render): A4, A5 and US Letter pages to the stage 6 rules; either language leads; continuation pages (14 rows on page 1, 20 after, totals on the last page only, "Brought forward" and "Carried forward"); amount in words for JOD in English and Arabic; `--doc-accent`, the tenant's print colour, the same in light and dark mode.
- Sales documents: quote, tax invoice (English leads, Arabic leads, and a two-page version), credit note and A5 receipt. They tell one story: QUO-0318 → INV-1042 (JOD 301.600) → CN-0012 (JOD 98.600) → RCT-0207 (JOD 203.000).
- Accounts documents: statement of account (running balance, ageing), payment reminder (short letter, overdue invoices only, sent by the Billing assistant with approval) and delivery note (no prices, signed on receipt).
- People documents: payslip (earnings and deductions in separate columns, net pay in words, leave balance beside the totals), employment letter (Arabic leads, salary in figures and words, QR to verify) and leave approval (balance before and after, approval trail from the audit log).
- General documents: a two-page sales report (summary, key numbers, chart, tables, notes), a business letter and a purchase order.
- New parts: `DocPages` (letters and reports), `DocTable`, `DocKpis`, `DocBars`, and the `aside` slot beside the totals.
- The P1 components from the stage 7 inventory, built or upgraded: tenant logo slot, tooltip (on every icon button), text fields with counter and read-only, combobox, radio group and mixed checkbox, date and date range, money input, one-time code, search field, tenant switcher, language and theme switch, data table (selection, bulk bar with money total, sort, row menu, totals row, loading, empty and error), avatar, description list, timeline, toast with Undo, confirm with typed name, drawer, menu and popover, approvals queue, undo bar and document preview. The action proposal now shows two changes then "Show all", and the undo window.
- 10 icons added (87): sort arrows, chevron up, minus, zoom in and out, light, dark and system. A menu icon followed in stage 9 (88).

Choices made while building (follow the locked rules; not separately decided)

- The JoFotara stamp is in ink, because 6.3 keeps the tenant colour on the title only.

- The stamp and QR appear on page 1 only; continuation pages carry the reference and page number.
- The quote has no stamp (not a tax document); its QR opens the quote online to accept it. The receipt has no stamp; its QR checks the receipt.
- Continuation pages open with a "Brought forward" row.
- Space between blocks is 5 mm on A4 and 3.5 mm on A5.
- Charts on paper are grey with the one bar that matters in ink, values on the bars and no legend, because 6.3 keeps the tenant colour on the title only. On screen, charts use the chart palette.
- Documents an agent made or sent say so in the footer, with the person it acted for (payment reminder, report, leave approval).
- HR documents (payslip, employment letter, leave approval) carry a QR to verify instead of a wet signature where the approval happened in Whity. The employment letter keeps a signature and stamp row because institutions expect one.
- Working days in examples run Sunday to Thursday.
- Calendars start on Saturday and grey Friday and Saturday as the weekend (the Jordan convention); both can be changed per tenant.
- Inputs accept Arabic-Indic digits and the Arabic decimal mark and store Western digits (3.7b).
- Tooltips appear after 500 ms on hover and at once on keyboard focus; they name things and never hold information needed to finish a task.
- Toasts sit at the bottom end corner. Errors and toasts that need action stay until dismissed.
- Agents never get a human face or photo: their avatar is the robot face on the tint. The system's avatar is the mark.
- Typing the name to confirm is kept for the biggest destructive actions (deleting a workspace, revoking every agent); anything that can be undone uses Undo instead of a confirm.
- The drawer is 480 px wide and covers the screen under 768 px.
- 700 weight removed from the tenant logo styles (stage 3: no 700 in the product).

Still open in the inventory

- None for P1: the agent activity filter and the collapsed and mobile app shell were built in stage 9. P2 and P3 items stay planned (see section 17).

To check before shipping

- The Arabic amount in words, with an Arabic-speaking accountant.
- The required invoice and credit note fields, against the JoFotara specification.

Stage 9 · Final guideline (locked 28 Oct 2026)

Published

- Design system v2.0 final: this register, the README and sections 01–17 (16 Documents and 17 Components new), every section rewritten from this register; 78 component, screen and document cards plus the cover; tokens, handoff files, logo files, social images and the motion clip.
- Brand guidelines PDF 2.0: 65 landscape A4 pages, built from the same sections, with the logo, colour, type, shape and document figures and real renders of the screens and documents.
- The cover: the mark's two planes at cover scale on the 24 grid (platform with the blueprint plus-grid, the sheet blank), a plane-deep block and an ink slab; the name in Readex Pro 600; "A blank sheet, on the platform beneath it."
- Social images redrawn with the v2 mark: the link preview (a sheet on the grey ground, Readex Pro headline, lockup bottom-start) and the avatar (the app icon tile, mark inside the inner 61%).
- The set-down motion clip re-recorded from the v2 components (proposal with its undo window).

Fixes found while checking v1 content against the register

- Dark-mode control border (`input`) raised to oklch(0.52 0 0), 3.3:1 on the card, so every control border passes 3:1.
- Logo size tokens follow stage 1: horizontal lockup at least 20 px tall, the mark switches cut at 24 px, clear space 25% of the mark height (Flutter constants too).
- The Tailwind theme (`handoff/web/theme.css`) carries the stage 2–4 tokens: tint, status text and tint colours, divider, table header, chart 6, plane shadows, `shadow-float`, control radii, the display face, the plane lift and the blueprint grid.

- No 700 weight left in the component styles.
- Action proposal: the expired state (grey, "Ask again") and the undone state (dashed again, "Undone by …") added beside waiting, approved and declined.
- App shell: the 56 px rail with tooltips from 768 to 1023 px, and a drawer with a menu button under 768 px.
- Agent activity: filter by agent.
- Plan names and prices in cards replaced with placeholders, as stage 5 words require.
- The agent icon is the robot face everywhere (old wording removed from the Icon card and README).
- From the independent check against this register: the label on the main colour is pure white (#ffffff, 6.1:1, decision 2.1), not #fafafa; selected text on the dark tint is the main colour on dark (#59a0f9, 5.1:1; the partner's #e97c47, 4.9:1), decision 7.3; the 20px brand headline tracks −1%; the 700 font files and Geist Mono 600 are no longer declared; empty-state icons are 24px (5.2); menu items have 8px corners (¼ of 32); `Money` shows JOD with 3 decimals; the branding screen derives the whole tenant set from one colour (`Whity.tenantTheme`, decision 2.8); the stale v1 wording in the Button, Mark, Lockup, Icon, Actor chip, Badge, Tabs, Menu, Branding, Money and Page header READMEs was corrected.

Values set while building (follow the locked rules)

- Large controls are 40px, for a single call to action; corners 10px (¼ rule).
- The stacked lockup's minimum height is 48px (the horizontal stays at 20px, 1.7c).
- Menu and popover items are 32px tall with 8px corners.
- "Bold" in documents (the grand total, 6.6) means weight 600, since 3.6 allows no 700.

Rule for later changes

- Change this register first, then the files, then republish the guideline and bump its version (2.1, 2.2 …).

Version 2.1 · P2 components (28 Oct 2026)

Stage 7's P2 items, built to the locked stage 7 rules. Asked and decided on 28 Oct 2026:

#	Decision	Locked value
2.1a	Dark chart graphite	#858585 (see 2.7).
2.1b	Charts in Arabic	Time and values run left to right in both languages, like the numbers on them. Titles, legends and the table view follow the page direction.
2.1c	Command palette	⌘K (Ctrl K) searches records, pages and actions; the last row always asks an agent, dashed like every agent sheet, and the agent comes back with a proposal to approve.
2.1d	Plan gate	A feature outside the plan shows greyed behind a card naming the plan. Owners get Upgrade and Compare plans; everyone else gets "Ask an owner". Never hidden. Plan names and prices stay placeholders.

Built

- Actions: button group, split button (one plane under the main pair), toggle group (pressed = the tint, 7.3).
- Inputs: phone input (+962 default, regional list, grouped as read, landlines 8 digits and mobiles 9 in Jordan, stored as E.164), file upload (dashed drop area, progress, done, error with Try again).
- Navigation: command palette, stepper (3–6 steps; "Step n of total" under 600px).
- Agents: agent run status (running with progress and Stop, waiting dashed with Review, done, failed with the next step and Try again; a compact pill).
- Platform: plan gate.
- Data: bar, line and donut charts on the 2.7 palette, series 1 the tenant's main colour; bars ≤24px with a 4px rounded end, 2px lines, 8px end dots with a 2px ring, one value labelled, a tooltip on every mark, "Show as table" on every chart, one axis only, a donut folds past six slices into "Other".
- Still planned: tag input and signature (P3).

Document editor (version 2.2, locked 29 Oct 2026)

A Notion-, Gutenberg- and Google Docs–inspired editor for whity-core's Document designer (A33, `/admin/documents`). The design system designs it and defines its components (cards in every state, specs, the TypeScript contract for the document model and props, a TipTap/ProseMirror handoff); the Whity team builds the working editor. Decided one part at a time, starting 29 Oct 2026:

#	Decision	Locked value
E.1	Deliverable	Design-system definition: components, states, rules and contract. Implementation by the Whity team.
E.2	Surface	Blocks (Notion/Gutenberg) on a continuous sheet, with an A4 page view (Google Docs) for what Whity Render prints.
E.3	First version	Merge fields, comments and suggestions, rich blocks. Live collaboration (cursors, presence, version history) comes later.
E.4	Agent edits	Agents write as suggestions: dashed, attributed ("Billing assistant for Amro"), nothing lands until a person accepts.
E.5	Formatting tools	A fixed Google Docs–style toolbar, plus the selection bubble and the / menu.
E.6	Comments and suggestions	Cards in a margin rail beside the text they belong to; a drawer list under 1024px.
E.7	Default view	By document type: templates and anything Whity Render prints open in the page view; notes and wiki pages open continuous. Either can switch.
E.8	Block chrome	Hovering any block shows + and a drag handle in the margin; selecting a table, image, callout or embed shows its own toolbar above it.
E.9	Publishing	Templates have a draft and a published version: edits stay a draft until Publish (the one main action), and Whity Render and agents use the published version. Notes and wiki pages save live, with no Publish.
E.10	Mode without edit permission	Suggesting: they propose changes and comment, and someone who can edit accepts, the same as agents.
E.11	Dark mode	Papers (the A4 page view) stay white, like what prints; notes and wiki (the continuous sheet) follow the theme.
E.12	Preview with a record	Fields show the record's values; comment highlights and suggestions are hidden so the pages look as they will print; the rail says so; read-only until Show fields.
E.13	Block catalogue (v1)	Text, Heading 1–3, Quote, Code · Bulleted, Numbered, Checklist (3 levels) · Callout · Toggle, Columns (2), Divider, Page break · Table, Image (half, wide, full; caption), File · Record and Chart (live), Signature and stamp.
E.14	Callouts	Two kinds: Note (grey) and Important (warning tint), so the success and error colours keep meaning state.
E.15	Tables	Document tables: rows, columns, a header row, end-aligned numbers. Data stays in records and comes in as a Record or Chart block; no databases inside documents.
E.16	Live values	Record and Chart blocks are live in the editor; each PDF freezes the values at the moment Whity Render made it.
E.17	Plugin blocks: rendering	Plugins can add their own blocks. A Verified plugin is a signed declaration, drawn with the Whity SDK components by Whity's block renderer; publishers' own JavaScript never runs in the app. Other screens run in a sandboxed frame, sized by the editor. Security: `VERIFIED-PLUGINS-SECURITY.md`.

#	Decision	Locked value
E.18	Plugin blocks: printing	A plugin block needs a print view for Whity Render to be used in templates or anything that prints; without one it's available in notes and wiki pages only.
E.19	Plugin blocks: plugin off	The block shows a placeholder ("Needs the Delivery Tracker plugin", with Enable for admins), its data stays in the document, and a template that contains it can't be published.
E.20	Plugin blocks: inserting	A group per plugin in the / menu and + inserter, with its name and logo, after Whity's own blocks; searchable like the rest.
E.21	Saved blocks: sync	People can select several blocks and save them as one block. When saving they choose Synced (editing it once updates every document that uses it) or Copy (inserts a copy people change freely). A synced block can be detached into a copy.
E.22	Saved blocks: sharing	The creator picks Only me or Everyone in the workspace; owners and admins manage the workspace library.
E.23	Saved blocks: per-document parts	In a synced block, the creator can mark text or fields as filled per document (a signer's name, a date); the rest stays synced. Merge fields work inside.
E.24	Saved blocks: packaging	Workspace-only in v1; exporting a saved block as a plugin block comes with the plugin SDK work.
E.25	Highlight	One highlight colour (the sky series at 40%), so colour never carries meaning in a document that may print in black and white.
E.26	Merge field chips	The field's plain name on the tint ("Customer name"); the path (`customer.name`) on hover; one character for the caret.
E.27	Missing values	Preview flags a missing value on the error tint. Whity Render leaves an optional field blank and won't issue a document with a required field missing; fiscal fields are required.
E.28	Markdown shortcuts	On for everyone; ⌘Z straight after turns the shortcut back into what was typed.
E.29	Accepting suggestions	Anyone who can edit the document accepts or rejects suggestions, including an agent's; each decision is logged with their name.
E.30	@mentioning an agent	The agent replies in the thread; anything it changes in the document arrives as a suggestion.
E.31	Agent context	When asked inside a document, an agent reads the document and the records its fields and blocks point to, within its own and the person's permissions.

#	Decision	Locked value
E.32	Unprompted agents	Agents suggest changes only when asked, or by a routine an owner sets up (for example, checking templates against new tax rules each month); always as suggestions.
E.33	Body size on screen	16px in the continuous sheet (a step up from the app's 14px); the page view uses stage 6's 9.5pt. Headings Noto Sans 600 at 24, 20 and 18px on screen and 14, 12 and 10.5pt on paper; the title alone is Readex Pro.
E.34	Full width	A per-document Full width switch for wiki pages with wide tables; the 760px sheet (616px of text) is the default.
E.35	Arabic document titles	Readex Pro 600 in its Arabic design, so 3.1 (document titles in Readex Pro) holds in both languages; the brand ships the Arabic subset (`readex-pro-arabic-600.woff2`). The Arabic invoice and every Arabic title follow. Product screens still never use Readex Pro. Asked and decided 29 Oct 2026.
E.36	⌘K in the editor	With text selected, ⌘K adds a link; with no selection it opens the command palette, as everywhere else (2.1c). Asked and decided 29 Oct 2026.
E.37	Publish checks	Publishing a template is blocked by: open suggestions, a block whose plugin is off (E.19), a block without a print view (E.18), or a field the record type doesn't have. The check lists each with a way to fix it.
E.38	Synced blocks in templates	Editing a synced saved block updates drafts, notes and wiki pages at once; a published template picks up the change at its next publish, so what prints never changes without a person publishing it.
E.39	Comment highlight	Comments mark their text with the warning tint and a warning underline, on screen only; it never prints and isn't the highlight colour (E.25).
E.40	Barcode block	A Whity block: Code 128, EAN-13 or Code 39, with the value typed or a merge field and the text under it optional. Ink only, sized in mm in the page view. Group "Whity" in the / menu. Added when the editor replaced the Document designer's canvas mode. Asked and decided 29 Oct 2026.
E.41	QR code block	A Whity block: a value or a merge field as a QR, with an optional caption. Distinct from the document's verification QR in the footer (6.7), which stays automatic. Asked and decided 29 Oct 2026.
E.42	Maths block	A block (and an inline `math` node) for formulas in TeX, rendered with KaTeX on screen and in print. Group "Basic". Asked and decided 29 Oct 2026.
E.43	Label sheets	A document kind `label`: a sheet (A4, Letter) divided into a fixed grid of labels, each one the same blocks with fields; Print fills one label per record or per row of an uploaded CSV. It opens in the page view and never in the continuous view. Replaces the canvas mode's labels and certificates; a certificate is a one-label sheet. Asked and decided 29 Oct 2026.
E.44	Document themes	A document's look comes from a theme: Whity's standard theme, a plugin's, or the workspace's own, which a document can override for the print colour and the letterhead only. No personal themes. A theme is a closed set of values (print colour, letterhead logo and lines, and the options in E.45-E.47), never CSS; everything else follows stage 6 and E.33. Inheritance: Whity standard, then a plugin theme, then the workspace theme, then the document. The

#	Decision	Locked value
		print colour defaults to the workspace main colour (2.8). A published template keeps the theme it was published with until it's published again (as E.38). See `DOCUMENT-THEMES.md`. Asked and decided 31 Oct 2026.
E.45	Accent on headings	A theme option, off by default: Heading 1-3 in the print colour as well as the title. This relaxes 6.3 ("title only") for themes that choose it; the owner's decision, against the recommendation to keep 6.3. Asked and decided 31 Oct 2026.
E.46	Title face	A theme option: the document title in Readex Pro 600 (default, 3.1 and E.35) or in Noto Sans 600 (Noto Sans Arabic 600 in Arabic). Product screens still never use Readex Pro. Asked and decided 31 Oct 2026.
E.47	Large print	A theme option: an 11pt body in print with headings scaled by the same steps as 6.5 and E.33; Arabic stays at 100% of the Latin size (3.7a). Asked and decided 31 Oct 2026.

Parts: 1 shell (locked 29 Oct, cards EditorShell) · 2 canvas (locked 29 Oct, cards EditorShell, EditorPageView) · 3 blocks (locked 29 Oct, cards EditorBlocks, EditorBlockChrome) · 3b plugin and saved blocks (locked 29 Oct, card EditorCustomBlocks) · 4 inline (locked 29 Oct, card EditorInline) · 5 inserting (locked 29 Oct, card EditorInsert) · 6 collaboration (locked 29 Oct, card EditorCollab) · 7 agents (locked 29 Oct, card EditorAgents) · 8 typography (locked 29 Oct, card EditorType). All parts locked 29 Oct 2026; compiled into version 2.2. E.40–E.43 added on 29 Oct 2026 with the engineering survey (M0), when the editor was chosen to replace both modes of the existing Document designer; they have no cards yet.

Plugin store (version 2.3, locked 31 Oct 2026)

The pages where a workspace finds, installs and manages plugins (A41). Guideline section 19; cards in "Templates · Plugin store".

#	Decision	Locked value
S.1	Where	In the app first (A41, `/admin/plugins/store`). A workspace installs declarative plugins into that workspace. A code plugin is install-wide, for the whole deployment, and only an operator installs it. A public marketplace site reuses the same pages later.
S.2	Billing	Paid plugins are billed through Whity: one invoice from Whity, which takes the marketplace cut and pays publishers. Prices show as `[price]` until decided.
S.3	Who installs	Declarative plugins: anyone in the workspace whose role has `plugins:install` (S.9). Code plugins: operators only, from the system tenant. Agents can't install directly; with "Ask first" it becomes a proposal like any other action (7.5).
S.4	Trust	Verified and By Whity badges, the permissions a plugin asks for, "used by N workspaces" and its last update. Everything else is labelled Not verified, with a plain warning that its code runs on the server once it's on. A code plugin whose exact version the Whity store reviewed is labelled Verified too, with "Reviewed on app.whity.dev on [date]; its code runs on your server" (8 Nov 2026, VERIFIED-PLUGINS-SECURITY.md 4.1). No ratings or reviews until there are enough installs for them to mean something.
S.5	Agent tools on install	Every tool a plugin adds starts on Ask first; read-only tools may start Allowed. An admin changes modes afterwards in MCP tools, like any other tool.
S.6	Updates	A Verified declarative plugin's update installs automatically; one that asks for new permissions or new outside domains waits for an admin's approval, and the old version keeps running meanwhile. A code plugin only ever updates by hand. Every update is in the audit log.
S.7	Uninstall	The plugin's data is kept 30 days; reinstalling in that time restores everything, then it is deleted. Its blocks show the plugin-off placeholder (E.20) meanwhile.
S.8	Trials	A paid plugin may offer a free trial; the publisher sets the length. Billing starts when it ends, with a reminder before it does.
S.9	Install and upload	Two permissions: `plugins:install` installs from the store (declarative plugins in a workspace; code plugins only in the system tenant, S.3); `plugins:upload` (operators) uploads a .zip of unreviewed code. `plugins:read` sees the pages. Decided 2 Nov 2026 against the built app; narrowed 3 Nov.
S.10	Sidebar	One sidebar item, Plugins. Its page has two tabs, Store and Installed, which keep their own routes (`/admin/plugins/store`, `/admin/plugins`).
S.11	Operator tools	Upload plugin and Reload plugins sit in a ⋯ menu on the Installed tab, for `plugins:upload`. Store sources and their access tokens move to Settings › Advanced. A failed plugin's error and stack trace are in its details drawer, collapsed.
S.12	State after install	Verified declarative and By Whity plugins are active once installed (the Access step is the consent). Anything Not verified installs turned off, with Turn on on the Done step.

Values set while drawing, open to change: - Third-party plugins are named for their job, "[Job] for Whity" or a plain name. Names starting with "Whity" are kept for first-party products. - Trust marks: By Whity in the primary colour, Verified in the success colour, Sandboxed in muted grey with a lock. "Adds" chips on every tile: Screens, Document blocks, Agent tools (primary tint), Fields, Connects out. - Install is one dialog with a Stepper: Access, Plan (paid only), Set up (only if the plugin declares settings), Done. Outside domains always show in a warning row. - Installed states: Active, Trial, Update waiting, Failed, Turned off; uninstalled plugins sit under "Recently removed" for the 30 days.

Home (version 2.4, locked 2 Nov 2026)

The page people land on after signing in, replacing the `/dashboard` placeholder and the Dashboard link to server statistics. Decided 2 Nov 2026, from the Whity team's inventory of the built app:

#	Decision	Locked value
H.1	One home	Everyone lands on `/dashboard`, the sidebar's Dashboard. It is built per person: it shows only the cards for what that person can see and do. System-tenant operators also get the platform cards of the admin dashboard.
H.2	What leads	**Waiting for you**: one list merging Inbox documents and agent Approvals, oldest first, with the decision buttons inline.
H.3	Server statistics	`/admin/stats` becomes **System**, under Platform, for system-tenant operators only. Its numbers also feed the operators' cards on the home.
H.4	Cards	Installed apps can each add one card to the home. People can hide cards but not rearrange them (v1).

Values set while drawing, open to change: - The title greets the person by first name with the time of day; the description gives the date, the workspace and their branch. - Waiting for you shows at most six rows, then "and N more". Decisions are inline outline buttons (Approve beside a ghost Decline or Reject; Open when the item needs reading), so the home has no filled main button. When nothing waits, it collapses to one line. - Owners and admins see "Finish setting up" until it's done: logo and colour, team, an agent, the tax number (invoices need it) and a plan. - App cards: the app's logo and name, one number, a few lines, at most one chart; ⋯ has Hide from home and Open; hidden cards are listed at the foot with Show. A card shows only the person's scope.

Finishing the app (versions 2.5–2.9, planned 2 Nov 2026)

Every screen in the Whity team's web app inventory (develop at `01db4bcd`, 1 Nov 2026) gets a design by 2.9.

#	Decision	Locked value
V.1	Order	2.5 page patterns and People · 2.6 Forms · 2.7 Documents and routing · 2.8 AI and agents · 2.9 Workspace, billing and settings. The inventory's problems (raw ids, missing confirmations, untranslated strings, kit violations) are fixed in the version that draws each screen.
V.2	Depth	Each screen is drawn in its main state. Loading, empty, error, read-only and access denied are drawn once as patterns (2.5), and each screen's README names its own versions of them.
V.3	Arabic	One Arabic card per version, the busiest screen mirrored; every README lists the Arabic labels.
V.4	Delivery	Register, cards and sections are published every version; the guidelines PDF and the handoff zip are rebuilt once, at 2.9.

2.5 Page patterns and People (locked 2 Nov 2026)

Patterns every later version reuses, then the People screens. Decided 2 Nov 2026:

#	Decision	Locked value
P.1	Row click	Things with history and settings (people, roles, workspaces) open a full record page with its own address. Small things (a group, a delegation, a tag, a unit) open a side drawer.
P.2	Record page	A header with the name, status and key facts, then tabs: Overview, Access, History.
P.3	Editing	Fields are edited where they are. A sticky bar with Discard and Save changes appears as soon as something changes, and leaving asks first.
P.4	Confirming	By how undoable it is. Undoable: it happens at once with Undo. Hard to undo: a dialog that names the consequence. Security-sensitive or irreversible: the dialog plus typing the name.

Values set while drawing, open to change: - The sidebar follows the built app's groups in sentence case; only the current group is open, the others fold to their label (`AppShell` nav groups take `collapsed`). - People are always names with avatars, never ids; units, roles and dates are words. History is written in sentences, never event codes. - A changed field gets the primary ring and a "Was …" note; the save bar names the changes. - Filter buttons tint and name their value when set. Status lists use a segmented switch. - Inbox states are words the

app composes and translates: Your decision, To review, For your information, You approved, You rejected, Returned to you. - A role's Access tab is a grid of areas by See, Create, Change, Delete, Approve; built-in roles are read-only with Duplicate to change.

2.6 Forms (locked 2 Nov 2026)

Form Builder, the forms catalogue, filling in, the public form and My submissions (A34). Decided 2 Nov 2026:

#	Decision	Locked value
F.1	Builder	The form as it will look, with questions edited in place on a canvas; the selected question's settings (type, required, help, logic, who sees answers) in a side panel.
F.2	Filling	Short forms on one page. A form with sections shows them as steps with a Stepper, saving a draft as people go.
F.3	Public form	The workspace's brand leads (logo and colour); a small "Built on Whity" in the footer.
F.4	Responses	Each form has Questions, Responses and Settings tabs. Responses shows a summary per question, then a table; a response opens as a record with its routing.

Values set while drawing, open to change: - Sections carry a bar in the main colour; a selected question gets the primary ring and a small toolbar (move, duplicate, delete); conditional questions show an "Only if …" pill. - The settings panel includes "Save the answer to", mapping an answer to a field on a record. - Prefilled answers show as a summary from the person's profile, not as fields to retype. Drafts save on the server. - The Forms page shows cards, drafts first under "Continue where you left off". My submissions shows where each submission is. - Public form states: sent (with a reference), closed (with a way to reach the workspace), not available. Buttons name the action ("Send application").

Ease of use (version 2.7, locked 2 Nov 2026)

Company infrastructure and management screens are used mostly by people over 50. These override earlier values where they differ.

#	Decision	Locked value
A.1	Size	Product text 15px (was 14px, 3.5a); nothing below 13px (was 11px); controls 40px (small 32, large 44; was 36, 28, 40); table rows 48px (was 44); control corners stay ¼ of height (10px). Printed documents and the editor sheet are unchanged.
A.2	Actions	Common actions are visible, labelled buttons. Icon-only buttons always have a text label on hover and focus. ⋯ holds only rare or destructive actions.
A.3	Plain words	Management screens speak in plain words. Permission codes, ids and stack traces appear only when the person turns on **Show technical details** (a personal setting, also on the page where codes matter).
A.4	Applies to	Everything designed so far is updated (home, store, 2.5, 2.6, components) and every screen from 2.7 on follows it.

2.7 Documents and routing (locked 2 Nov 2026)

The library and document record, templates, notes and wiki, route templates and the flow editor, and circulation (A30–A32). Decided 2 Nov 2026:

#	Decision	Locked value
D.1	Areas	Library, Templates, Route templates and Notes and wiki stay separate sidebar items, each its own page.
D.2	Flow editor	A top-down flow: stages stacked with arrows; branches (approved, rejected) side by side under their stage; the selected stage's settings in an inspector beside it.
D.3	Circulation	A tab on the document record. Record tabs: Document, Routing, History, Verification. `/admin/document-routing/[id]` redirects to the Routing tab.
D.4	Library	A rail of saved-search folders (Created by me, Awaiting me, Starred, collections and the rest) beside a list or grid, as built.

Values set while drawing, open to change: - Route stages: done green with a check, current in the main colour with a ring, next grey; each shows the people reached, the rule and the time. - Your decision: an optional note seen by everyone on the route, then Approve (main), Reject, Return to the sender, Forward to someone else, and one sentence on what happens next. - Routes are described in one sentence in the route list. Flow editor branches are labelled on their arrows; the inspector shows how many people a stage reaches today. - A document's SHA-256 checksum appears only with Show technical details (A.3).

2.8 AI and agents (locked 2 Nov 2026)

Whity's own agents, outside AI apps connected to Whity, and what AI can do (A20–A23).
Decided 2 Nov 2026:

#	Decision	Locked value
AI.1	Naming	**Agents** are Whity's own agents. **Connected AI apps** (was AI principals) are outside apps (Claude, Cursor, ChatGPT and others) signed in to Whity. The sidebar's AI group: Agents, Connected AI apps, What AI can do.
AI.2	New agent	Start from a preset: a gallery of ready agents (Billing assistant, Stock assistant and others); pick one, adjust it, done. Blank is the last card.
AI.3	Agent page	A record page (P.2) with tabs: Overview (what it does and for whom), Instructions, What it may do (Off, Ask first, Allowed), Activity.
AI.4	What AI can do	The MCP tools page becomes **What AI can do**: actions in plain words, grouped by area, with how agents may use each. Tool names, toolsets and token counts appear only with Show technical details (A.3).

Values set while drawing, open to change: - The agents list shows "On its own" as counts of Allowed and Ask first actions. Tabs: My agents, Everyone's agents (admins). - Presets show what each is for, three things it does, and what it needs (an app, or "Works with Whity alone"). - Instructions are a plain text box written as to a new colleague; "What it may read" lists pages and templates; tone and language are choices. - Connect an AI app: three steps (app, what it may do, set up) with the app's own steps, Copy address, and a dashed waiting line; no filled button on the last step. - What AI can do columns: Action, Area, Agents (can do it, proposes, suggests only, never), If it goes wrong.

2.9 Workspace, billing and settings (locked 2 Nov 2026)

The Settings area, a person's account, billing, the audit log, and the operators' Platform pages (A40–A53, U04). Decided 2 Nov 2026:

#	Decision	Locked value
W.1	Settings	One Settings entry in the sidebar; each settings page has a grouped sub-nav beside it (Workspace, Sign-in and security, Email, Data, Advanced) and keeps its own address, as built.
W.2	Operators	Install-wide pages (Tenants, Plans and pricing, Promotions, System, Errors, Notification delivery, and the install's email, storage, feature flags and languages) live in the sidebar's **Platform** group, shown only to the system tenant. Workspace admins never see them.
W.3	Account	A person's own settings in tabs: Profile, Sign-in and security, Sessions and devices, Preferences (language, theme, **text size** Standard or Larger, Show technical details).
W.4	Audit log	Sentences grouped by day ("Amro Saleh changed Ahmad Khalil's unit to Abdoun"), with filters for person, agent, area and date; raw details behind Show technical details.

Values set while drawing, open to change: - The settings sub-nav adds a Devices group (Licensed devices), which had no link in the built app. - Tags and tag groups share one page. Translations shows coverage tiles and "Only missing Arabic" by default. - Text size Larger is 17px, every size one step up. - Prices and discounts are typed with MoneyInput in normal units with the currency's decimals; Promotions default to JOD. - System refreshes every minute and says so. Errors lead with plain words; technical details on request. - Platform settings: install-wide switches as sentences; Email, File storage, Languages and Error tracking as tabs.

Whity mobile (version 3.0, coverage complete 8 November 2026)

The phone app, designed mobile first and for one-handed use. Decided one part at a time from 8 Nov 2026:

#	Decision	Locked value
M.1	Scope	A do-on-the-go companion: everything people do away from a desk (approvals, inbox, agents, forms, documents to read and sign, stock counts, notifications). Setup, builders and admin stay on the web.
M.2	Navigation	A bottom tab bar in the thumb zone: Home, Inbox, a centre **Create** button, Agents, More. Apps and settings live in More.
M.3	Platform	One Whity look on iPhone and Android (Flutter), with native behaviour: system back gesture, share sheet, haptics, date pickers and keyboard.
M.4	Main action	A sticky bar at the bottom, above the tab bar, holds the screen's one main button, full width; secondary actions sit beside it or in a sheet. The top of the screen is for reading.
M.5	Size	Body text 17px, nothing below 14px; every tappable target at least 48 × 48. The app follows the phone's own text-size setting.
M.6	Gestures	Customisable per person. By default, swipes only do safe things (mark read, archive, snooze), always with Undo, and approve and decline are buttons. Power users can opt in to swipe to approve and decline in their preferences.
M.7	Search	On list screens the search bar sits at the bottom, above the tab bar; filters open as a bottom sheet. The title stays at the top.
M.8	Security	Face or fingerprint to open the app after a while and to confirm tier-3 actions (instead of typing a name); a 6-digit app PIN as the fallback.
M.9	Swipe limits	With swipe to approve turned on, a swipe approves only tier-1 and tier-2 items, with Undo. Security-sensitive or irreversible items (tier 3) always open and ask for Face or fingerprint.
M.10	Home	Waiting for you shows one decision card at a time by default (next card after each decision); a list is a personal option. Tapping opens the full decision with Approve in the bottom bar.
M.11	Create	The centre button opens a sheet: Ask an agent on top, then six large tiles chosen by role (Fill a form, Scan a receipt, Stock count, New note and others), which each person can change.
M.12	Agents tab	Chat plus activity: talk to your agents (type, or hold to speak) and see what they did and proposed today in one feed.
M.13	Themed by the installation	The app connects to a Whity installation, pulls its design tokens on connection, and styles itself accordingly, so custom installations get their own mobile app for free.
M.14	Connecting	Email first: the person types their work email and the app finds their installation and workspace. Or they scan a QR code from the web app, or type the installation's address.
M.15	Theme scope	The installation's full published tokens (colours, type, corners, logo, name, light and dark), with Whity defaults filling any gap. Guard rails: the 17px and 48px minimums (M.5) always hold, and a colour pair that fails contrast

#	Decision	Locked value
		falls back to its Whity default.
M.16	App identity	Free: the Whity app, fully branded inside once connected; its store icon and name stay Whity. Paid add-on: an installation's own app in the stores, with its icon and name, built from the same code.
M.17	Switching	A person can add several installations and workspaces and switch between them; switching re-themes the whole app, and notifications say which workspace they come from.
M.18	Onboarding	First-time mobile screens set up the person's preferences and show them around the app.
M.19	Motion with meaning	Lottie animations enhance onboarding and key moments, and every animation follows resistance and animation principles so it tells the app's story and explains the interaction, never motion just to look good.
M.20	Destructive swipes	Delete and other destructive swipes feel hard and resistant.
M.21	Tier 3 swipes	Swiping a tier-3 card makes it feel stuck: it barely moves, then a popup says tier 3 needs verification and asks for it (Face or fingerprint, M.8).
M.22	Onboarding contents	People may be new to Whity entirely, so onboarding also handles creating their Whity ID (and what comes with it), as well as the story, preferences and the guided tour.
M.23	Lottie, two kinds	Brand animations make the Whity brand make sense (the story). Real UI in motion explains what each preference will mean for the person when they choose it.
M.24	Destructive swipe feel	Heavy, with a point of no return: the row follows the thumb at about a third of its speed, the red grows, a firm haptic tick at 70%; let go before it and it springs back. Undo after.
M.25	Reduce motion	When the phone asks for less motion: Lottie stops on its last frame, movement becomes fades, resistance stays as haptics and colour, and the tier-3 "stuck" becomes a short buzz and the popup.
M.26	Whity ID	One account for every installation: sign in once with Whity ID and reach all your workspaces on any installation. Installations may also keep their own sign-in (Google, Microsoft, their SSO).
M.27	Creating a Whity ID	A combination: email and password as the basic way; signing up with Google or Apple also creates a Whity ID; the phone's passkey is linked to the Whity ID as a trusted device, and from then on the person approves their sign-ins elsewhere from their phone (like Google's prompts). Authenticator apps can be set up too.
M.28	Onboarding order	Story → Whity ID → workspace → preferences → guided tour.
M.29	No workspace yet	Two cases. A **tenant creator** creates a tenant (workspace) on an installation: app.whity.dev or a custom deployment built with Whity. A **customer of a tenant** needs the least resistance possible to sign up and use that tenant's product, on Whity or on a custom installation.

#	Decision	Locked value
M.30	Tenant creator	Creates the essentials on the phone, then goes: choose the installation (app.whity.dev or a custom address), name, logo from a photo, main colour with a live preview, invite people, and plan and trial if the installation sells plans. The rest happens on the web, with a link emailed.
M.31	Tenant's customer	Arrives by the tenant's link, website or a QR (on a receipt, say); the app opens already in the tenant's brand, and Continue with Apple or Google creates their Whity ID and joins them in one step. No story or tour unless they ask.
M.32	Approving sign-ins	The phone asks "Is this you signing in?" with the place and device; the person taps the number shown on the other screen, then Face or fingerprint.
M.33	Protecting the account	A "Protect your account" step in onboarding: save this phone as a passkey (the default), or set up an authenticator app; required only when the workspace demands two-step sign-in.
M.34	Your picture	Onboarding helps people make their picture: a pattern generated from a random seed, or an uploaded profile photo.
M.35	The patterns	Built from Whity's own shapes (the sheet with its offset, the dashed sheet, the platform), arranged by a seed from the person's Whity ID, so the same person always looks the same.
M.36	Picking	The pattern made from their name, a Shuffle button, and a row of six alternatives to tap.
M.37	Pattern colours	From the palette of the installation where the Whity ID was made, with contrast guard rails; the picture keeps those colours in every installation.
M.38	Photo	Take a photo or choose one, with a round crop; the step comes right after confirming the email; the Google picture is offered first when they signed up with Google; skippable, keeping the pattern.
M.39	Full app pages	Whity mobile gets its full set of pages: Inbox, More, preferences, sign-in and security, and management pages, with the states between them.
M.40	Management on the phone	On-the-go essentials: approve, let people in, invite, pause or remove people, pause agents, see activity and billing, sign documents, fill forms, count stock. Deep setup (roles, route templates, form builder, branding, plugins) opens on the web, with a one-time link emailed and approved on the phone.
M.41	More tab	The person's card on top (picture, name, role, workspace), the workspace switcher, then grouped 56px rows: My work, Manage (admins only), You (preferences, sign-in and security), Help and about.
M.42	Sign-in and security	A status checklist on top ("Well protected, 3 of 4": strong password, this phone as a passkey, recovery codes, authenticator app) with the missing step as a button; then ways to sign in, devices, recent sign-ins, app lock, recovery.
M.43	Inbox tab	Three tabs at the top (Waiting for me, Mentions, Updates); search and filters at the bottom (M.7); swipes as the person set them (M.6).

#	Decision	Locked value
M.44	Push notifications	Notifications only open the app: no Approve or Decline on a notification. Opening asks for Face ID and lands on that decision.
M.45	Arabic	Fully mirrored: tab order, back arrows, lists, sheets and swipe directions. Numbers, amounts and codes stay Western digits, left to right.
M.46	Which hand	A preference, right hand by default, that moves the main button in two-button bars and steppers to the thumb's side and flips the swipe-to-approve direction.
M.47	Tablets	Same app; from 744 points wide, lists and their detail show side by side and a side rail replaces the tab bar.

Values set while drawing the picture step (open to change): - The step is 3 of 5 in creating a Whity ID, before Protect your account; changed later from More › Profile › Picture with the same screens. - Four pattern layouts (sheet on the platform, stacked sheets, dashed sheet with a dot, sheet on a diagonal band), a slight rotation, at most three shapes so each reads at 24px. Fixed lightness: pale background near the brand hue, the brand colour, its dark (the mark's offset colour), one accent hue. - The preview is 168px; the six alternatives are 48px with 52px targets; Shuffle and Use a photo sit side by side in the lower half. - The crop is a 300px circle on a dark screen; a zoom slider and a Turn button make it work with one thumb (pinch still works); "How it'll look" shows 48, 32 and 24px. - Apple shares no picture, so Apple and email sign-ups start from their pattern. Customers who join a tenant with Google (M.31) get their Google picture without this step. - Patterns are for people only: agents keep the robot, the system keeps the mark. Removing a photo goes back to the pattern. - Components: `Avatar pattern=… hue=…`, `W.avatarPattern(seed, hue)` and `W.brandHue(hex)`; two icons added (shuffle, rotate), 123 in all.

Values set while drawing the full app pages (open to change): - Inbox: Waiting for me is oldest first; Updates group by day and show Undo with the time left; filters are what, from, how long waiting, and order. - More shows the Manage group only to people with admin rights. Help and about includes a help assistant (an agent), replay the tour, the story, reporting a problem with a screenshot and log. - Preferences: Display, Using Whity, Feel (haptics, sounds, reduce motion), Data (Wi-Fi only downloads). Swipe left and right are each chosen from a list; swipe right to approve is off by default. Sign-in approvals can't be turned off; quiet hours default 22:00 to 07:00; the lock screen hides amounts by default. - Security: app lock asks again after 5 minutes by default; three failed Face IDs fall back to the 6-digit PIN; tier-3 decisions always ask for Face ID. Authenticator setup on the same phone uses a direct link or a copyable key instead of a QR.

Showing recovery codes asks for Face ID; ten codes. - People: tabs Everyone, Want to join, Invited; search at the bottom with a + beside it to invite; pausing, resetting two-step and removing a person are tier 3 (Face ID). A request to join gets the Member role unless changed. - Agents (managing): Pause all agents is the emergency stop; pausing one agent needs no Face ID, since it's safe and reversible; permissions change on the web. - Documents: To sign first; signing is always Face ID; Return sends it back with a comment. - Forms: one step per screen, saved as you go; stock count with a 72px stepper, + on the thumb side. - Offline: tier-1 and tier-2 decisions queue and send later; signing and tier 3 wait for a connection. - Links to the web work once, for 15 minutes, and the sign-in is approved on the phone. - Fourteen icons added for these pages (key, archive, barcode, signature, at, fingerprint, shield, text-size, gesture, card, pause, play, attach, ban): 137 in all.

Values set while completing mobile coverage (open to change): - In Arabic the main button follows the hand setting, not the reading direction: with the right hand (default) Approve stays on the right. - Notifications name their workspace, hide amounts on the lock screen by default, stack per agent, and open on a press-and-hold with Open in Whity; in-app banners last 4 seconds and never cover the bottom bars. - Unlocking: Face ID straight away, app PIN fallback, five wrong PINs sign the phone out. A new phone signs in by number matching on the old one or with a passkey; a lost phone uses a recovery code or the admin resets two-step. - Tier-3 verification lasts 2 minutes. Decline asks for an optional reason and, by default, tells the agent. Editing an agent's draft shows how much changed. - Receipt scanning marks each read field Sure or Check. Voice: hold to speak, let go to send, slide left to cancel. Unclear requests make the agent ask one question with tappable answers first. - Search everything is reached by pulling down on Home or setting a list's scope to Everything; results group by kind; nothing found offers an agent. - The customer app uses the tenant plugin's tabs; payments offer CliQ (default), card and cash on delivery. - Largest text sizes stack rows and show the tab bar as icons, with labels on press and hold. Screen readers read a decision card as one sentence. - Tablets: list pane 400 points; sheets become centred dialogs or popovers; actions sit at the bottom right of the detail. - Sessions end after 30 days by default; an update can be required by the installation; no-access pages offer "Ask for access"; errors show a reference code. - Section 26 lists the mobile screens as MB01–MB62.

Work and operations (version 3.1, coverage complete 8 November 2026)

Decided from 8 November 2026. Sixteen areas: documents, flows, agents, agent chats, meetings, inventory, tasks, boards, organisational units, roles and delegations, approvals, approval gating, forms, applications, money and expenses, subscriptions and tiers, appointments.

#	Decision	Choice
X.1	Surfaces	These sixteen areas are designed for web and mobile in full, including setup and builders on the phone. For them, this replaces M.40's "deep setup on the web".
X.2	Boards	Kanban boards for work.
X.3	Meetings	Both: everyday meetings, and formal meeting bodies (committees with members, terms, quorum, minutes and resolutions).
X.4	Applications	Requests people submit (a permit, membership, a job, a grant), with review stages and a decision.
T.1	Agents and tasks	Agents complete their tasks on their own when their scope allows; "Ask first" actions still become proposals.
T.2	Boards and tasks	A board is a view of tasks: each board is a project, columns are task statuses, and the same task shows in lists, calendars and boards.
T.3	Taskaat	Tasks integrate with Taskaat (taskaat.dev), which is the engine: tasks, boards, checks, evidence and decisions live in Taskaat; Whity's Tasks and Boards pages read and write them with Whity's people, permissions, approvals and look. Whity works with Taskaat on the integration.
T.4	Done when	Agents' tasks must have a "done when" check written before work starts, and submit evidence for a person to accept; people may add a check when it helps. A task closed without passing evidence stays "Done, unverified".
MT.1	Minutes	An agent drafts minutes, resolutions and action items from typed notes and an optional recording (everyone told); the secretary approves, the chair signs.
AP.1	Appointments	Customers and staff both book: customers on the tenant's booking page or in the customer app; staff manage calendars of people and rooms, services and availability.
IN.1	Inventory	Stock in every place (counts, transfers, reorder levels, the Stock assistant proposing reorders), plus recipes (what goes into what you make, and its cost) and batches with expiry dates.
MO.1	Money and expenses	Light accounting: expense claims, company cards and petty cash, invoices and payments, budgets, plus a chart of accounts, journal entries and the sales tax return. Companies with an accountant's system export to it.
SU.1	Subscriptions and tiers	Both: the workspace's own Whity plan (Billing), and plans a tenant sells its customers, in tiers, with subscribers, renewals and failed payments.
AA.1	Applications review	Each application type has a form, stages and scoring criteria; reviewers score against the criteria; an agent checks documents first and asks for what's missing.
CH.1	Chat	Agents' chats and people's chats share one chat: agents are part of the team, join direct chats and groups, and are clearly marked (robot face, an Agent tag, who they work for, what they may do in that chat).

#	Decision	Choice
CH.2	Chat members	One-to-one by default; any chat can add people and several agents, who hand work to each other in the open. Adding an agent says what it can read (from now on by default), who it works for there, and what it may do.
AQ.1	Approvals in bulk	Reviewing one at a time stays the default; a list view lets ordinary tier-1 items be approved together; tier 2 and 3 always open one by one.
AG.1	Approval gating	Every gating approval asks for Face ID or a passkey; clearing someone's two-step also needs a second admin, who can't be the requester.
FL.1	Flows	Workflows across everything: a trigger, steps where people decide and agents act, conditions and waits. A document's route is one kind of flow.
FL.2	Building on the phone	Flows and forms are built on the phone as a list of steps in sentences, no canvas; a step can be added between any two.
OR.1	Organisation on the phone	Browse units level by level, change someone's role, and hand your decisions to someone while you're away ("I'm away"), with dates.
DC.1	Documents on the phone	Read and sign, comment and suggest, edit text and checklists; tables, fields and templates show and take comments, with editing on the web; an agent helps with text.

Values set while drawing round 1 (open to change): - Sidebar: a **Work** group (Tasks, Boards, Meetings, Appointments, Applications) after the top items, and **Operations** (Inventory, Money and expenses); Agent chats joins AI. - Tasks: tabs My tasks, Assigned by me, Agents' tasks, All; groups Overdue, Today, This week, Later, Done today; List, Board or Calendar. The task panel: Done when (blue box), evidence item by item, the gate (Send back, Accept as done), decisions, and the Taskaat task and sync time. "Open in Taskaat" opens the same task. - Boards: columns To do, Doing, Awaiting review, Done by default; **Awaiting review is the gate** and can't be skipped by dragging (skipping marks the task unverified). Dragged cards lift onto the plane, tilted 2°. - Meetings: formal meetings have a blue edge; bodies list chair, secretary, members, schedule and quorum. Resolutions are numbered per meeting (14/1) with votes. Action items become Taskaat tasks when the minutes are approved; agents' items get a drafted done-when check. Recordings are kept 30 days by default. - Appointments: day and week views with people and rooms as columns; booked blue, checked in green, requests dashed amber; reminders by WhatsApp 24 hours and 2 hours before; cancel or move up to 24 hours before by default. - Nine icons added (kanban, meeting, appointment, flag, video, record, gavel, evidence, check-in): 146 in all.

Values set while drawing round 2 (open to change): - Sidebar: Operations holds Inventory, Money and expenses, and Subscriptions. - Inventory: tabs Stock, Batches, Recipes, Counts, Transfers; a low figure is red; expiring within 7 days is flagged; first expiring, first out. Making a batch takes the ingredients out, adds the product with a batch number and expiry (made date + shelf life), and prints labels; a shortage says what to do. - Money: tabs Overview, Expenses, Invoices, Payments, Budgets, Accounts, Sales tax. Account names are plain words with the codes beside them. The Bookkeeping assistant sorts bank lines into accounts; matched lines can be posted together, guesses need a choice. The sales tax return is for two-month periods with JoFotara reporting counts; Whity prepares it, the company files it. Over budget changes who approves (here, the owner). - Subscriptions: retries 3 times over 7 days, a WhatsApp each time with a link to pay, then pause (not cancel); CliQ and card. "Chosen most" comes from real numbers. Cancelling asks once whether to pause instead. - Applications: others' scores stay hidden until a reviewer saves their own; the average shows once two have scored. Stages in a pipeline with counts; bulk moves with a message template per stage. - Six icons added (package, transfer, recipe, batch, bank, wallet): 152 in all.

Values set while drawing round 3 (open to change): - **CH.3, the phone's fourth tab becomes Chat** (it was Agents, M.2 and M.12): people and agents together, with Agents today as its second view. Arabic: المحادثات. Reverse this if the Agents tab should stay. - The sidebar gets **Chat** among the top items (with an unread count); the AI group keeps Agents, Connected AI apps and What AI can do. - In chat, agents' messages have a blue edge (web) or a blue-tinted bubble (phone); proposals are dashed cards showing who must decide, and only that person sees Approve; hand-offs and "is drafting" are system lines. Agents read a chat only from when they joined (unless set otherwise, which everyone sees) and never other chats. - Approvals list: kinds are named Ordinary (tier 1), Check first (tier 2) and Needs verifying (tier 3, with a lock); bulk approval keeps a separate Undo for each item. - Gating shows request dates and the identity checks done (who called whom, when). - Agents can be created on the phone in four steps: preset, instructions, what it may do, where it works.

Values set while drawing round 4 (open to change): - Sidebar: **Flows** joins the Work group; Route templates move into Flows (a document still shows its route on its Routing tab). - Each flow reads as a sentence with its changeable words highlighted. Kinds of step: trigger (blue), condition (amber, Yes and No side by side), a person decides (a person, a role, a unit's manager), an agent acts (dashed), wait, done. "Describe a flow" lets an agent draft one. Publishing a new version applies to new runs; runs in progress finish on their version. If no one answers: remind after a day, then pass it on after two (per step). - I'm away: dates, a delegate,

what goes to them (approvals in flows, agents' proposals, documents to sign); anything above what the delegate may approve waits; a message for people who write; coming back early ends it. - Role changes on the phone describe each role in plain words; more powerful roles ask for Face ID; the permissions grid stays on the web. - Suggesting on the phone shows a green "Suggesting" chip; deletions red and struck, additions green and underlined; the document's owner accepts or rejects; an agent's text help arrives as suggestions. - Four icons added (trigger, branch, away, org): 156 in all. - All sixteen areas now have web and phone designs (coverage table in section 27).

Roadmap (8 November 2026)

#	Decision	Choice
R.1	Near term	The low-hanging fruit joins the plan. Design next: contacts, custom fields on existing records, spreadsheet import, receiving goods and supplier bills, waste and stock adjustments, bank reconciliation, basic reports, the 80 mm receipt, agent notifications by email and WhatsApp. Build after A6: A7 quick wins on built pages, A8 contacts and import, A9 custom fields, A10 tasks and boards on Taskaat.
R.2	Long term	Everything else goes to the long-term plan, in order: Studio (custom records, views, formulas, page builder), the flows engine with code steps, sales and point of sale, full inventory and production, full accounting, HR and payroll, projects with time tracking, building the 3.1 modules, Whity mobile, reporting, integrations, platform (several companies and currencies, test and live, packaging customizations), live collaboration. Section 28.

Near-term pages (version 3.2, 8 November 2026)

The roadmap's near-term design items N1–N9 (R.1) are drawn. Values set while drawing (open to change): - Sidebar: Operations holds Contacts, Inventory, Money and expenses, Subscriptions and Reports. - Contacts: one record for customers and suppliers (a contact can be both); balances in mono, late red; a contact's page shows the workspace's own fields. - Custom fields: twelve kinds (short and long text, choose one or several, amount, date, time range, a person, a contact, yes or no, file, formula); usable at once in lists, filters, document merge fields and flow conditions. - Import: Excel or CSV; Whity suggests matches and fixes what it can (adds +962), says what will be created, updated and skipped before anything changes, and the whole import can be undone for 24 hours. - Receiving and bills: three-way match (ordered, received, billed) line by line; the Bookkeeping assistant reads the bill and proposes the fix for a mismatch. - Waste: reasons from a short list; approval above JOD 25 a line by the branch manager; end-of-day reminder at closing time. - Bank reconciliation: statements uploaded or forwarded; exact matches confirmed together; the assistant's likely matches dashed; the month closes at a zero difference. - Reports: profit and loss against the previous period, who owes us and whom we owe by 0, 1–30, 31–60 and 60+ days, balance sheet, stock value, sales tax; PDF and a monthly email. - The 80 mm receipt: 72 mm printable, Geist Mono, sales tax 16%, JOD to 3 decimals, the JoFotara QR, Arabic mirrored with Western digits. - Agent notifications by email and WhatsApp only open Whity, like push (M.44); at most one per agent per hour except sign-in approvals.

Websites (8 November 2026)

#	Decision	Choice
WS.1	whity.dev	Two doors, companies first: the page speaks to small companies (what Whity does, agents, made for here, your brand, plans in JOD), with a second door to builders (open source, SDK, MCP)
WS.2	Deliverable	Each site as design-system cards plus build-ready static pages: whity.dev, brand.whity.dev, health.whity.dev, id.whity.dev (sign in, approve on the phone, account), docs.whity.dev (home and an article). Section 29
WS.3	Languages	English and Arabic, fully mirrored under `/ar/`; the name stays "Whity" in Latin letters
WS.4	People in the designs	The Whity team stands in for every person in cards, pages and docs: Amro Saleh, Awss Haddad, Ahmad Khalil, Ibrahim Mansour, Emad Nasser (Arabic: عمرو صالح، أوس حداد، أحمد خليل، إبراهيم منصور، عماد ناصر). Where a screen needs more than five people, a team first name takes another common surname. Companies stay fictional (Example Bakery and friends)
WS.5	Plans on whity.dev	Prices, limits and features are read from Whity's backend (`GET /api/public/plans`, built from the entitlement bundles of ADR 0010), with fallback to the copy last saved in the visitor's browser, then to the plans built into the page. Contract in section 29
WS.6	whity.dev hero	Headline kept ("Your company's work, in one place. Agents prepare it. You approve it."); the picture is the web Home with the phone in front, both showing what's waiting for approval; Book a demo opens Whity's own booking page
WS.7	What it does, and module pages	The home section leads with four large cards (invoices and money, stock and recipes, approvals, documents and signing), each with a small screen and a link to its page; the other four sit in a compact row. Each of the four gets its own page from one template (hero with a screen, what you can do, agents, works with, questions, final call), in English and Arabic
WS.8	whity.dev Agents	One proposal visitors try themselves: Approve sets it down on the plane, Undo plays it back, and the three steps light up as it goes; then an "Agents never" list (do more than you allow, have more rights than their person, hide what they did, pass for a person). "Your name on it" lets visitors try a colour on the brand animation; each module page has its own animation
WS.9	whity.dev Made for here	Five points (Arabic and English, JoFotara, CliQ, WhatsApp, dinars to three decimals), each with a small animation, beside a receipt visitors switch between English and Arabic: the layout mirrors, the numbers don't change
WS.10	Small details on the sites	The hero sets down once on load (the web Home lands on its plane, then the phone slides in); approving on the hero's phone updates the web Home behind it, with Undo; sections ease in once (10 px, 400 ms); the main button lifts and its plane grows on hover; clickable cards lift onto the plane; the nav gets a line once the page scrolls. None of it runs when less motion is asked for, and every page works without it
WS.11	whity.dev For builders	A terminal types the real install commands from whity.dev/install once when seen, with Copy and Play again; three cards (open source, build apps, agents can run it) with small animations; one line for agencies ("sell Whity under your own brand") linking to a partners page to design later. The terminal stays left to right in Arabic

#	Decision	Choice
WS.12	whity.dev Questions, final call, footer	Eight straight answers, always open (free, growing past 5, agents, where data is kept, leaving, Arabic, developers, who approves), then "Book 30 minutes with the team"; the final call sits on its own sheet on the plane with four ticks (free for 5, no card, Arabic and English, leave with your data); the footer shows live status from health.whity.dev (a plain link if it doesn't answer), the four promises and Back to top
WS.13	whity.dev Security page	One page at `whity.dev/security` (Arabic under `/ar/`): a plain promise and a lock that sets down on view; six areas done properly (signing in, who can see what, agents, risky steps need two people, your data, open to inspection), three ticks each; "What we don't have yet" says plainly there are no certifications or outside audits so far; reporting is by email to security@whity.dev and `/.well-known/security.txt`, four steps, and credit by name (no money for now) in a "Thank you" list that starts empty; hosting is not named yet
WS.14	Mega footer on every whity.dev page	A deep-blue blueprint band: the logo, one line on what Whity is, live status, language and a colour switch (same as my device, light, dark; remembered on that browser); "Talk to the team" with Amman's time and Book a call; all eight things Whity does as white tiles that set down one by one onto a long plane when they come into view; five link columns (Product, Company, Builders, Trust, Your account); a giant faint "Whity" that rises letter by letter onto a dark plane; the legal line, the four promises and Back to top. A soft light follows the mouse. Nothing moves when less motion is asked for, and it all works without scripts
WS.15	whity.dev Partners page	One page at `whity.dev/partners` for four kinds of partner: agencies selling Whity as their own, companies setting it up for clients, plugin developers, and hosts running it for regulated clients. Visitors type their agency's name and pick a colour to see the sign-in page their clients would get (`id.youragency.jo`, no Whity name anywhere). Terms are contact-based for now: no prices, discounts or shares on the page; a call (`app.whity.dev/book/whity/partners`) agrees them partner by partner. "None yet. We're looking for the first." with empty slots. Four straight answers and a final Book a call. This supersedes showing the BM.10 partner price and revenue share publicly until they're set
WS.16	whity.dev About page	One page at `whity.dev/about`: the story is repeated client work ("We kept building the same system. So we built it once, and opened it."), shown as three client copies of the same system that slide together into one base on the plane when the page opens. Facts: started 2026, made in Amman, Jordan (no street address), open source, Arabic and English. The four promises. A short note from the founder, signed Amro K. Saleh, Founder (Whity has one founder; initials, no photo). No registered company name yet, so none is shown. The site keeps saying "the team"
WS.17	Global, not Jordan-only	Whity is a global tool. Marketing never says it is built for companies in Jordan or the region. Hero eyebrow "For small and growing companies"; "Made for here" becomes "Works locally: Local where it matters" (your tax system's e-invoicing with Jordan's JoFotara first, local payments like CliQ in Jordan, your currency to the right decimals); prices are "published, monthly" with no currency named in copy (the plans feed sets the currency); data is kept "in a region your country's data protection law accepts, with an in-country option"; footer: "Open source, for companies anywhere". Jordan stays only as the origin (built in Amman, Amman time for calls) and as examples. Updates the wording of WS.1, WS.9, WS.13, WS.15, WS.16 and how BM.9 is described publicly; BM.9 itself (which regions are offered) is to be re-checked for a global offer

#	Decision	Choice
WS.18	Hosted in the EU	Whity's own hosting is in the EU: servers and database on EU servers (the provider is not named), files on Cloudflare R2 (EU), backups on Cloudflare (EU); domains and connections go through Cloudflare's worldwide network, which stores nothing of the customer's. The sites say "Hosted in the EU" (a footer badge linking to the Security page) and "stored in the EU"; no GDPR claim until a lawyer checks it. The Security page lists the providers (what, who, where), as is standard. Data inside one country: we host a dedicated installation there for a fee, or the company runs Whity on its own servers and pays for the Whity services it uses. Replaces the Jordan-region wording of BM.9 and lifts WS.13's "hosting is not named yet"
WS.19	whity.dev Contact page	One page at `whity.dev/contact`. "Talk to us." with Amman's time, and a "Who are you?" card that sends people the right way: new to Whity (book a call, write a message, hello@), my company uses Whity (Help inside Whity, the guides, support@), I run Whity Core myself (GitHub issues, docs, install), agency or host (partners call, Partners page, partners@). A message form (topic chips, name, optional company, email or phone, message) posts to `app.whity.dev/api/public/contact`; if sending fails the message stays and hello@ is offered. Four addresses with copy buttons: hello@, support@, partners@, security@. No promise on reply time ("We read everything")
LT.4	Lottie in the app	The web app and the phone use Lottie at five kinds of moment: empty states, done moments, the first run, waiting, and errors (14 new files, 31 in all). Approving **one** item plays `approve-set-down` (1.2 s) and Undo plays it back; **bulk** approval stays the 200 ms set-down in code (5.4 now covers bulk only). Lively but short: everyday moments 1–1.5 s, first-time and rare ones up to 3 s; empty states once a session per list, first-run scenes once ever; loops only while really waiting. One scene at most on a screen, never blocking, and the words always say what happened. New **Animations** setting (Full, Calm, Off; reduce motion means Off). Cards `TplMoments`, `TmMoments`
WS.20	Install in one line	`curl -fsSL https://whity.dev/install.sh | sh` (the team writes the script, spec in section 29): checks Docker and Node.js and stops with plain words if one is missing, downloads Whity Core into `./whity-core`, starts PostgreSQL 15 and the app in Docker, sets up the database with sample data (`--empty` for none), prints an admin sign-in with a one-time password, opens localhost:3000; options `--dir`, `--empty`, `--version`. `whity.dev/install` shows the line, the five steps, the manual README steps (no local PHP: `make setup`; the old `composer install` step was wrong) and where next. The home page's builders terminal now shows the one line
WS.21	Privacy page	`whity.dev/privacy`: privacy in plain words (what we keep, why, where: the EU, who can see it, how long, what you can do), the other questions (your customers and staff, cookies: only sign-in and language, agents, changes), and a marked place for the full policy once a lawyer has checked it. Retention numbers in brackets until decided
WS.22	Licence page	`whity.dev/license`: AGPL-3.0 with the Whity Plugin Exception in plain words (you can, you must, the plugin exception), a "Can I…?" table of common cases, the name ("The code is free; the name is not"), and links to LICENSE on GitHub and gnu.org rather than a copy. Marked as a guide, not legal advice
WS.23	whity.dev 404	The not-found animation, "This page isn't here.", and five ways on: Home, What it does, Plans, Docs, Contact
EM.1	Emails	Fifteen emails in English and Arabic, build-ready in `handoff/emails/` with placeholders: account (invitation, verify email, reset password, new sign-in, two-step turned off), money to a workspace's customers (invoice, quote, payment reminder, receipt), agents (needs your approval, which only opens the app; daily summary at 18:00),

#	Decision	Choice
		workspace and billing (workspace ready; from Whity itself: plan limit, payment failed, Whity receipt). White-label: the workspace's logo, name and colour, "Sent with Whity" removed with white-label. Body 17 px, one main button, dark mode supported. Security emails can't be turned off

The build plan gains A11 (receiving, waste and bank), A12 (reports and agent notifications) and W1–W5 (the websites, in the order whity.dev, health, id, brand, docs).

Business model and positioning (8 November 2026)

Approved by the owner on 9 November 2026, for now; trusted reviewers have the one-page summary (English and Arabic) and their feedback may change the numbers.

#	Decision	Choice
BM.1	Positioning	Company-first: "Your company's work in one place. Agents prepare it, you approve it." Builders and agencies come second: "Run it, or sell it as your own." Matches WS.1
BM.2	Three ways to run Whity	**Whity Cloud** (app.whity.dev, shared): the free way in, with Whity's own apps only, no third-party plugins or custom code. **Dedicated hosting**: we host a company's own installation and the company manages its Whity; needed for plugins and custom code, because plugins need a dedicated installation. **Own server**: Whity Core, free and open source
BM.3	Free limits	Whity's paid services (Whity ID, Whity Render, the mobile app, agents) are free up to **5 staff accounts** and **500 customers a month**. Agents and customers don't count as staff. A customer is someone outside the company who signs in with Whity ID, books, uses the customer app or portal, or pays online; contacts stored in records are always unlimited. The same limits apply on every installation, ours or theirs
BM.4	Paid steps	Plans with clear limits: Free (5 people, 500 customers), Team (25 people, 5,000 customers), Business (100 people, 25,000 customers), then a quote. Extra people or customers come in packs. These numbers are the starting point to test with first customers; plan names and prices stay `[plan name]` and `[price]`. Agent work stays base plus usage
BM.5	White-label, what's paid	A workspace's logo and colour are free on every plan. Paid: its own web address, sign-in page and email sender, removing "Built on Whity", and its own app in the stores (M.16)
BM.6	White-label, how far	Every Whity service is white-labelled on every level, including domain masking: sign-in (id.examplebakery.jo), documents and their QR check links, emails, notifications and the customer app run under the company's own domains, and Whity's name never shows to its customers
BM.7	Hosting fee	A dedicated installation is a flat monthly fee by size (small, medium, large: `[price]`), plus Whity services above the free limits
BM.8	Who hosts the services	Whity is the only host of Whity ID and Whity Render by default, for every installation, under the same limits. The exception is a paid on-premises licence (minimum contract, usage reported back) for regulated companies (banks, clinics, government) and large partners. Self-hosted installations keep working for a while if Whity ID can't be reached (open sessions continue; a local owner sign-in for emergencies). Core keeps supporting standard sign-in (OIDC), so Whity ID wins on convenience, not lock-in
BM.9	Data region	Hosted services run in a region Jordan's data protection law (No. 24 of 2023) accepts for transfers, to be confirmed by a Jordanian lawyer; a Jordan-only setup is offered at a higher price for regulated companies
BM.10	Partners	Agencies resell Whity to their clients under their own brand and choose how: a **partner price** (`[n]`% off; they invoice their clients; full white-label including domains) or a **revenue share** (clients pay Whity; the agency gets `[n]`% every month)
BM.11	Promises	Published on whity.dev and in the docs: **Open stays open** (Core stays open source for good; nothing free moves behind a paywall); **Your data is yours** (export everything any time in open formats; leaving costs nothing; Core works with any standard sign-in provider); **Free means free** (the full product, not a trial, no card; passing a limit warns first

#	Decision	Choice
		and never locks out or deletes); **Plain pricing** (published prices in JOD, monthly for small companies, no hidden fees; charges for hosting, services, white-label and support)

Open: prices, the partner discount and share, pack sizes, the agent work included in each plan, the hosting sizes. Core is AGPL, so others may host Core commercially; the closed services, the partner programme and the trademark (section 11) are what only Whity sells.

Lottie (9 November 2026)

#	Decision	Choice
LT.1	Where	The website and the app together: whity.dev (Agents, Your name on it, the module pages), the phone app's onboarding story, and empty and loading states. Inside the product, approving stays the 200 ms set-down in code (5.4)
LT.2	How people interact	Try it yourself: people press Approve and Undo and watch it happen; other animations play once when seen and replay on a click or tap; nothing loops forever except real loading; less motion shows the last frame
LT.3	How they're made	Real Lottie files written in code from the brand's shapes, with no text inside and every colour named after a token, so players recolour them for dark mode and each workspace's colour; editable in LottieFiles or After Effects, and a motion designer can polish them later

The web app on a phone (version 3.4, 13 November 2026)

Answers WHIT-1006. Applies to the web app under 640px wide, in the browser and installed (PWA). It reuses the phone app's parts (section 26) so the two look the same. Cards: `PwNav`, `PwLists`, `PwLibrary`, `PwEditor`, `PwCalendar`, `PwSettings`, `PwBuilders`, `PwShortSidebar`; each in English and Arabic, light and dark.

#	Decision	Choice
PW.1	Navigation	**Owner decision:** the bottom tab bar on phones, in the browser as well as installed: Home, Inbox, the centre Create button, Chat, More (M.2, CH.3). Counts on Inbox and Chat. 640–767px keeps the top bar and drawer (`AppShellMobile`); 768–1023px the rail
PW.2	More and Create	More lists everything the sidebar has, in the same groups and order, the account first, Settings and Help last. Create opens the phone app's sheet (M.11)
PW.3	Keyboard	While the keyboard is open the tab bar hides and the screen's main button rides on the keyboard. In the browser our bar sits above the browser's own bar, padded for the safe area
PW.4	Lists	Every data table becomes stacked rows: the title with status and a row menu, then up to three label and value lines. Search with Filter and the main button sit at the bottom (M.4, M.7); Sort is a button by the title with the current order written under it; sort and filters open as sheets. **Select** shows boxes; the bulk bar takes the tab bar's place (main action, Export, More); Clear all / Choose all in the header, and a line offers every match when the screen is all chosen. Active filters are chips with ×; nothing found offers Clear filters
PW.5	Document library	A Folder button above the list says where you are and opens the folders as a sheet (unit filter, then the tree). Collections are chips under it, Starred first. List or grid by the title; sort beside the folder button; search at the bottom, results split into "In the title" and "In the text"
PW.6	Editor	A full-screen task with no tab bar. Two short lines on top: Back, the title and Publish; then the mode button and the save state. The mode opens a sheet (Editing, Suggesting, Viewing); Suggesting tints amber. The toolbar docks at the bottom and rides on the keyboard: text style, bold, italic, list, insert, comment, More, hide keyboard. More tools is a sheet (Preview, Page view, PDF, Find, Version history, then insert tiles). Publish opens the check as a sheet and waits for required items. Viewing shows Comment, PDF and Share at the bottom
PW.7	Calendar	Day is the phone agenda; Week is a list of day cards; Month is a grid of counts with the chosen day's bookings under it. The range on its own line between ‹ and ›, Today by the title, who and where as chips, three bookings then "n more" when busy, the weekend shaded. Services, Rooms and branches, Hours and time off and Settings switch from the title, as a sheet
PW.8	Settings	The settings menu is its own page: the five groups as titled lists. Coming back marks the page you came from **Last opened**. Pages have a back link, the path in small text, then the title. Groups a role can't open are hidden, with a line saying so. The save bar docks above the tab bar with Discard; search settings at the bottom
PW.9	Builders	**Read-only on a phone** for the route template editor and the role permissions grid: routes as numbered steps in sentences, permissions as one list per area with Allowed / Not allowed in words. A note says why; **Open on a computer** emails or copies the link. Flows stay editable as sentences (`TmFlowsMobile`)

#	Decision	Choice
PW.10	Sidebar on short screens	The workspace switcher at the top, and Settings and the account row at the bottom, stay put; only the links between them scroll, with a fade at either end and a line under the workspace once scrolled. The current page is scrolled into view. The account row opens its menu upward (WHIT-827): Account settings, Language, Light or Dark, Help, Sign out. Below 480px tall, groups fold to the current one (2.5)
PW.11	Installing it, and notifications	More offers “Install … on this phone” once, in the browser only (Android: the browser’s prompt; iPhone: three steps). Icon, name (12 characters) and splash come from the workspace’s branding; Whity’s console uses the Whity mark; “Built on Whity” on the splash only where the plan shows it (section 11). Notifications are asked for once from a card that says what they’re for and that there’s never marketing; the system prompt follows the tap, never on page load. They come in the workspace’s name and open the item. Card `PwInstall`

New icons for these: `folder`, `folder-open`, `grid`, `star`, `keyboard`, `checkbox`, `square` (Tabler, in `handoff/icons/`).

Screens with no card (version 3.4, 13 November 2026)

Answers engineering's list of 13 November ("Screens with no card"). Every card has English and Arabic, light and dark, people-over-50 sizing and one filled main button. Built on the Settings sub-nav of D1 everywhere it appears.

#	Screen	Choice	Card
SC.1	Messages inbox (WHIT-939)	Status tabs (Open, Waiting for customer, Closed) above a list and the conversation side by side from 768px; All, Mine, Unassigned and search over the list. Internal notes full width on amber with a lock and "customers never see notes". An agent's reply waits dashed with "not sent yet", the time it goes, Cancel and Edit. The composer switches Reply / Internal note and turns amber for a note. Assign and Close in the conversation header. Failed sends say why in red with Try again; no reply permission makes the composer a note	`TplMessagesInbox`, `PwMessages`
SC.2	Customer chat box	A plain card on the workspace's page: logo, name, when it replies. Name and email optional on the first message, the bot check in words above Send. Off, ended, too many messages and a failed bot check each say what to do next	`TplChatBox`
SC.3	Settings › Messages	Three cards: Web chat (on, greeting, link), Email (reply address), Incoming email (address and secret). The secret shows once under "Copy it now"; a new secret asks first and says the old one stops at once	`TplSettingsMessages`
SC.4	Approvals › Decided (WHIT-828)	Grouped by day: outcome as icon and word (approved, approved with changes, declined, undone, expired dashed), what the agent asked and any change or reason, who decided and when. Filters for outcome, agent, who decided and when; Export	`TplApprovalsDecided`
SC.5	Edit before approving	One field per argument with the agent's values; invalid input says what to do and "Approve with changes" waits until valid. Irreversible proposals say "Cannot be undone" and never pre-select Approve	`TplApprovalsDecided`
SC.6	Impact plan (WHIT-829)	Each change is a row with its kind in words: Safe, Changes data (with the number of records), Deletes data (solid red). English and Arabic text where people will see words. Tests under the changes; failures turn Approve off and offer "Ask Whity Builder to fix it". Destructive plans need a tick naming what is lost; "Try it on a copy" opens the test copy	`TplImpactPlan`
SC.7	Issuing an agent credential (WHIT-830)	Four steps: name it by its job, who it acts for (always the issuer), the starting grant (held reads Allowed, the rest Ask first, no-undo never Allowed; permissions the issuer lacks can't be given), the key shown once. Done waits for "I've put the key somewhere safe"	`TplAgentCredential`
SC.8	whity-agent desktop app (WHIT-821)	Tray menu; first run (sign in, tools found, choose and agree); tool rows say "as you" or "as an agent" with Disconnect and Put the file back for 7 days; review shows the command or the file before and after, Allow once never default for commands; quick ask and chat; settings; updates ask; problems say what to do	`TplWhityAgent`
SC.9	Saved blocks library (E.21–E.24)	Documents › Saved blocks: name, Synced or Copy, who can use it, where it's used, when it changed. Where it's used is a side panel (published templates "change at next publish", issued documents never). Delete keeps copies in every use and says so	`TplSavedBlocks`

#	Screen	Choice	Card
SC.10	Welcome and Create your workspace (M.29)	Three answers on one signed-out card: Create (name, main language, main colour), Waiting (names the workspace, offers no second one), You need an invitation (the exact address, with Copy)	`TplWelcomeWorkspace`
SC.11	Settings › Sign-up and team invites (WHIT-915)	Off, Approval required, Open with one line each; customer-safe roles only, with sign-ups paused when the saved role gains admin permissions; domains as chips; the link. New: Team invites lets a customer company invite its own people up to a number, starting as "Customer team member". The waiting queue on the same page with Approve, Reject and Approve all	`TplSettingsSignup`
SC.12	Join a workspace (WHIT-915)	In the workspace's own brand: name, email, bot check, Join; the confirm page chooses a password or joins with Whity ID. Eight outcome cards with one icon and one next step each. Unknown workspaces look like closed ones	`TplJoinWorkspace`
SC.13	Settings › Public forms (WHIT-906)	Keys list (name and form, short id, allowed sites, last used, status); issue with the allowed sites as chips; the key shown once; revoke asks and names the form that stops. Operators also see the bot check with a write-only secret and the "no bot check" switch off by default	`TplSettingsPublicForms`
SC.14	Passing a plan limit (BM.11)	A warning, never a block. An amber banner across the app for people who can change the plan; Billing shows a meter per limit ("7 of 5", when it starts again), over in amber with stripes and a word. Near (80%) is a quiet note on Billing only. Members see nothing	`TplPlanLimit`
SC.15	Document themes and the picker (WHIT-785, E.44–E.47)	Documents › Document themes: Whity standard, plugin themes and the workspace's own, with a short form (print colour with the contrast check in words, letterhead logo and lines, headings in colour, title face, large print), a live page preview and "Used by n published templates". In a document, the picker lists themes and then "Only for this document" (print colour, letterhead)	`TplDocThemes`
SC.16	Issuing a document from a template (M4c)	From the record: only templates for that kind, then the published template with the record's values in blue and missing fields dashed red; the bar holds the template's own fields and Issue, which explains the number. Edit before issuing makes a letter people can change	`TplIssueDocument`
SC.17	Two-column sign-in (#1734)	From 1024px: brand side at the start, form at the end. Whity's console uses sheets on paper with the plane under the sheet that holds Verify a document. A white-labelled workspace uses its colour, logo and one sentence, no Whity pattern. Under 1024px only the form, with Verify under it	`TplSignInTwoColumn`
SC.18	Whity ID, more screens	Create your Whity ID, the 6-digit email code, offer a passkey once, reset password, choose a workspace (only with more than one), devices, delete with a warning about workspaces you own	`TplWhityIdMore`

The earlier cards engineering asked about

- `TplAgents`, `TplAgentRecord`, `TplAgentPresets`, `TplAgentInstructions` cover the agents admin page (My agents and Everyone's agents), the agent's page and the preset gallery. Still to build to the old ask (WHIT-821): the persona editor's English and Arabic side by side with tone and

toolsets, the "a write can't start Allowed" line, "preset updated: review changes", archive and restore, and stopping use revoking credentials. Use `TplAgentInstructions` and `ScopeGrant` for them.

- `TplAppointments` covers the staff day view by person and room, with requests and services. Week, month and the sub-pages follow PW.7 at every width; the booking sheet (Move, Cancel naming the consequence), a time just taken (409), hours and time off still follow the old ask (WHIT-946, brand-ask-calendar).
- `Preferences` and `TplAccountPrefs` are the account page, not the user menu. The user menu is now drawn: `PwShortSidebar` (PW.10).
- `TplPlatformSettings` is the operator's install-wide switches, not the Settings sub-nav. The sub-nav is the left column of every `TplSettings*` card, now with all of D1's groups and pages (`TplSettingsMessages`, `TplSettingsSignup`, `TplSettingsPublicForms`).

Engineering's questions (version 3.4, 14 November 2026)

#	Question	Answer
Q34.1	"Hosted in the EU" while app.whity.dev isn't hosted in the EU	**Owner: it is hosted in the EU.** WS.18 stands as written: EU servers and database (provider not named), files on Cloudflare R2 (EU), backups on Cloudflare (EU). Put the claims back on the sites: the footer badge linking to Security, "stored in the EU" where it was. No GDPR claim. If the hosting ever changes, the claims come off the same day
E.23a	Stable keys for a saved block's per-document parts	Every per-document part gets a key minted once (`pd_` + nanoid) when the creator marks it, and keeps it through edits, moves, reordering, version bumps and translation. Text carries it on the `perDocument` mark; a merge field in `FieldRef.perDocument`; the block lists its parts in `perDocumentParts` with a label in English and Arabic, `required` and a placeholder. Documents store values in `overrides[key]`, never by position. Copying a part inside the block mints a new key; pasting elsewhere drops the mark. Values for parts a newer version removed stay stored and unprinted (`orphanedParts`), so going back restores them. Old rows migrate once: position `i` → `perDocumentParts[i].key`. Contract: `handoff/editor/whity-document.ts`
Q34.2	Privacy page	Still waiting for the lawyer's text and the retention periods. Keep `SitePrivacy`'s design; don't publish the page with `[date]`, `[30]`, `[35]` showing. Until then the footer links to the current page
Q34.3	The store revamp isn't in the repository	**Owner: section 19 is the store.** `19-plugin-store.md` with `TplPluginStore`, `TplPluginDetail`, `TplPluginInstall`, `TplPluginsInstalled` (and the store module moving to Whity ID) is everything; nothing else is coming. Align the store pages to it and close WHIT-831's wait

Form printouts (version 3.4, 14 November 2026)

A form's answers printed as a record, which doubles as the approval certificate when the form has an approval route. Asked for AAU's ethics committee; designed as a generic surface every Whity client builds on. Cards: `DocFormPrintout`, `DocFormPrintoutMore`, `DocFormLooks`, `DocFormBlocks`, `TplFormPrintStyle`. Engine work: `handoff/print/FORM-PRINTOUTS.md`.

#	Decision	Choice
FP.1	What it is	**Owner:** generic and customisable for every client, not an AAU one-off. Any form prints a clean record automatically from its sections and questions; "Customise in the editor" turns it into a template with the new blocks to rearrange
FP.2	Customisation and plans	**Owner:** paid plans and free trials customise every part (header, office details, decision placement, section headings A–F, question layout, long answers, choices, Yes / No / N/A, empty and N/A, signatures, approvals, footer) on a "Form printouts" tab of the workspace's document theme, with a live preview; a template can change a section. Free workspaces print the standard layout below with their logo and colour. **When a trial ends, new printouts go back to the standard layout; printouts already made never change**
FP.3	Standard layout	Letterhead and form title; the decision line on page 1 carrying the office details; questions stacked; choices with every option (☒ / ☐, chosen only above 8); Yes / No / N/A as a word with a mark; N/A sections collapse to one line and unanswered questions print "Not answered"; signatures "Confirmed in Whity" with the drawn signature; approvals as a list; footer with the reference, "Page x of y" and the client's marks
FP.4	Section headings	Six styles: A number and rule, B the Whity mark, C mono eyebrow, D progress rail, E sheet tab, F sheet on its plane. **Owner:** free workspaces use B (the mark's two offset squares carrying the number, in the client's colour); paid plans and trials choose. Like E.45, this lets the print colour reach section headings
FP.5	The decision	**Owner:** both — a short line on top of page 1 and the full block at the end: the decision in words with its mark (Approved, Conditionally approved, Revisions required, Not approved), reference, title, applicant, dates, validity, conditions (always printed, even "None") and the verification QR
FP.6	Approvals	**Owner:** a list with decisions: one row per approver with decision, name, role, date and time. Members who supervise the project are left out automatically, and a "Not counted" line names them and why. Signature cards are the alternative style
FP.7	Signatures	**Owner:** "Confirmed in Whity" with date and time, plus the signature drawn on a touch screen (phone, tablet, laptop touch screen). None drawn: a dashed line and "No drawn signature". Paper lines are an optional third style
FP.8	Questions	**Owner:** stacked and two columns are both options. Number and question 9 pt 600, guidance 8 pt grey, answer 9.5 pt 9 mm in; long answers flow across pages with "continued" and a word count ("142 of 300 words")
FP.9	Empty and N/A	**Owner:** collapse a section answered N/A throughout to one line, and print "Not answered" for an unanswered optional question; themes may hide them or print everything
FP.10	Footer and header	**Owner:** footer with the reference, "Page x of y" and the client's marks (theme images, such as ISO or accreditation); the QR stays in the decision block, with an optional small QR on every page. From page 2 a running header replaces the letterhead
FP.11	Document blocks	Every print block specified at print size, with today's blocks, changed ones and the new ones, in English and Arabic (`DocFormBlocks`)

#	Decision	Choice
FP.12	Example organisations	Design System cards use fictional clients (Example University, Example Bakery, Example Clinic). A real client's version, such as AAU's with its crest and marks, is configured in its workspace and kept outside the shared system

Every surface (version 3.4, 14 November 2026)

A sweep of every route and everything Whity sends or shows outside the app (117 routes against the app map). These were the surfaces with no design; each now has a card, and every row of the app map now names one.

#	Surface	Choice	Card
SU.1	Verifying a document (`verify/[token]`)	The page a printed QR opens: no sign-in, in the issuer's brand, English or Arabic from the browser. One answer per card: genuine (green seal), a newer version exists (amber), withdrawn or not found (grey, never red). Genuine lists what can be compared with the paper (document, issuer, date, reference, revision, pages) and never the content. Withdrawn is told only to people who can open the record	`TplVerifyDocument`
SU.2	Payment return (`billing/return`)	One centred card with one answer: active (plan, price, renewal, how it was paid, Go to billing), checking (dashed, people can leave), not confirmed yet, failed. Says plainly the plan didn't change; never "error"	`TplPaymentReturn`
SU.3	Calendar on a computer (WHIT-946)	Day, Week, Month; who and where as filters; Services, Rooms and branches, Hours and time off, Settings as tabs. Week starts on the workspace's first day; a red line for now; bookings in the primary tint, events grey, waiting for payment dashed. A booking opens a side sheet (Move, Message, Cancel, and what cancelling does to the deposit). A time just taken (409) says so and saves nothing. Several hour ranges a day	`TplCalendarStaff`
SU.4	Agent persona editor (WHIT-821)	Instructions in English and Arabic side by side, 4,000 characters each; tone, language, tool groups, where a person's grant starts (never Allowed for writes). Preset changes offer "Review the changes" with insertions and deletions. Archive keeps history; Stop using names what stops	`TplAgentPersona`
SU.5	WhatsApp and SMS to customers	Fixed templates with placeholders, English and Arabic, matching the email of the same moment: invoice, reminder, receipt, booking confirmed and reminder, order ready, sign-in code. Buttons open the customer's page on the workspace's domain	`MsgCustomerMessages`
SU.6	Link previews (Open Graph)	Whity's pages: sheets on paper, the lockup, one Readex Pro sentence, the address in mono. A workspace's public pages: its colour and logo, never Whity's pattern. Shared documents never preview content: issuer, title or reference, "private link". Text inside 1080 × 560; generated by Whity Render	`SiteShareCards`
SU.7	The installer in a terminal (WS.20)	Checks, two questions, four steps, the address to open. ✓ green, × red, ! amber, each with one line on what to do and "Nothing was changed" when it stops. No stack traces (`--verbose` for detail); colour only when supported; Arabic when the system is	`SiteInstallerTerminal`
SU.8	Emails, the rest	Bookings (confirmed and moved carry an `.ics` with one UID for the booking's life; cancelled sends METHOD:CANCEL), form received, form decision with the printout PDF, sign request, join approved and declined, message reply (threads back into Messages). Each in English and Arabic; 25 emails in all	`EmailBookings`, `EmailForms`, `EmailJoining`
SU.9	Cards in dark mode	Every card follows the Design System's theme, Arabic cards included (they set `dir` and `lang` after load so the theme can apply). Email cards show the emails' own dark-mode styles; printed pages stay white on a dark ground	all

#	Surface	Choice	Card
SU.10	A customer’s own booking (`/booking/[token]`, WHIT-945)	The page every booking email and message links to: no sign-in, in the workspace’s brand, English or Arabic. The booking, then Add to my calendar (main), Move it, Cancel it, and the online deadline in a sentence. Moving: the next days and free times as 44px buttons, taken times crossed out, the button names the new time. Cancelling names what happens to the deposit first; the reason is optional and goes to Messages. Inside the cut-off (24 hours by default) the actions become Message and Call; a time just taken says nothing changed; an old link points to the latest email	`TplBookingManage`

Carried forward, to be re-confirmed in their own stage

- The name is "Whity", with a capital W, in Latin letters only. There is no Arabic name, logo or brand copy.



whity.dev

Whity brand guidelines 3.4. Drawn from the decision register; where the two differ, the register wins.